



## NOTES:


- ROHS COMPLIANT
- HEADER: DAP (DIALLYL PHTHALATE) WITH FLAMMABILITY RATING UL 94V-0 OR BETTER.
- 3. STORAGE TEMPERATURE: -50°C TO +125°C
- 4. COMPLIANCE TO J-STD:
  - A. J-STD-002: SOLDERABILITY AT 245°C REFLOW PROFILE
  - B. J-STD-020: LEVEL 1, NO MOISTURE SENSITIVE
  - C. J-STD-075: R7, 245°C MAXIMUM THROUGH REFLOW SOLDER
- 5. TO ORDER TAPE & REEL PACKAGING ADD A "T" SUFFIX TO THE PART NUMBER(i.e HX5084FNL BECOMES HX5084FNLT).





HX5084FNL date code ctry mfg






FINAL OUTLINE

© Copyright, 2015. Pulse Electronics Corp. All rights reserved. Pulse confidential & proprietary. (09/21/15)

PRODUCT DESCRIPTION	TLA DRAWING	PS DRAWING	SHEET	PART NO.	DATASHEET REV.
MDL,SIN,1GD,1:1,SM,TU	HX5084FNL-11	PS-2759.001-A	1 OF 3	HX5084FNL	D





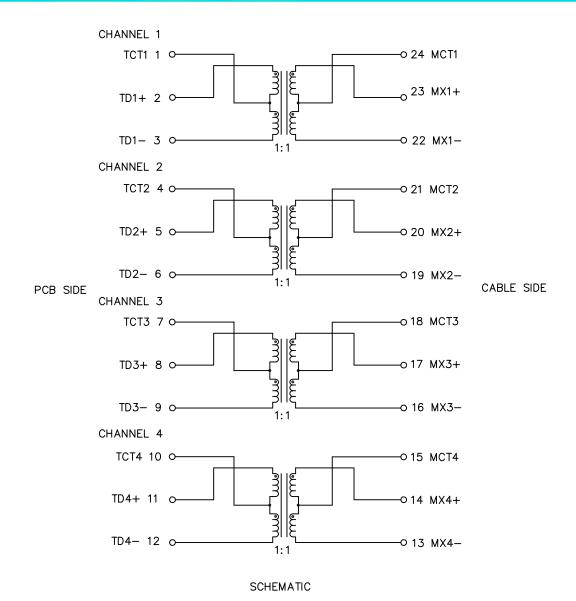

ELECTRICAL CHARACTERISTICS AT +25°C UNLESS OTHER SPECIFIED MEETS IEEE 802.3 SPECIFICATION

PARAMETER	SPECIFICATIONS			
OPERATING TEMP	-40°C - +85°C			
TURNS RATIO	1 : 1 ±2%			
POLARITY	PER SCHEMATIC			
	100 KHz	1-125 MHz		
INSERTION LOSS	-1.2 dB MAX	-0.2-0.002*f <sup>^1.4</sup> dB MAX		
RETURN LOSS	.1-40 MHz	40-100 MHz		
$(Z OUT = 100 OHM \pm 15\%)$	-16 dB MIN	-10+20*LOG <sub>10</sub> (f/80 MHz) dB MIN		
INDUCTANCE (OCL) (MEDIA SIDE, -40°C-85°C)	350 uH MIN	(MEASURED AT 100 KHz, 100 mVRMS) AND WITH 8 MA DC BIAS		
	1 MHz	10-100 MHz		
CROSSTALK, ADJACENT CHANNELS	-50 dB MIN	-55+22*LOG <sub>10</sub> (f/10) dB MIN		
COMMON MODE	2 MHz	30-200 MHz		
COMMON MODE REJECTION RATIO	-50 dB MIN	-15+20*LOG <sub>10</sub> (f/200) dB MIN		
INPUT - OUTPUT ISOLATION	1500	VRMS MIN @ 60 SECONDS		


NOTE: f IS FREQUENCY IN MHz.


@ Copyright, 2015. Pulse Electronics Corp. All rights reserved. Pulse confidential & proprietary. (09/21/15)


PRODUCT DESCRIPTION	TLA DRAWING	PS DRAWING	SHEET	PART NO.	DATASHEET REV.
MDL,SIN,1GD,1:1,SM,TU	HX5084FNL-11	PS-2759.001-A	2 OF 3	HX5084FNL	D






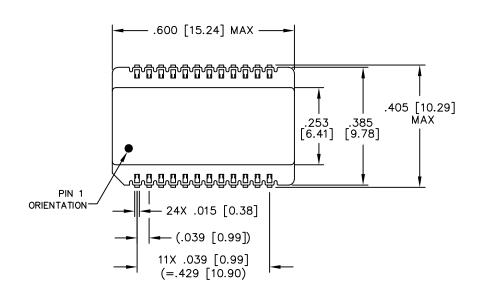

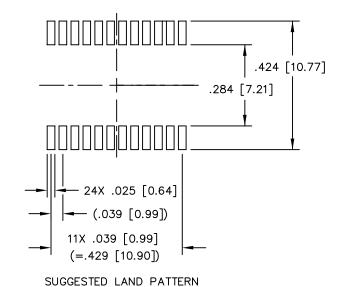

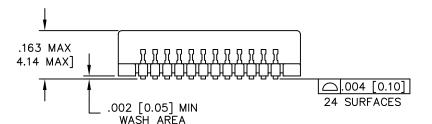

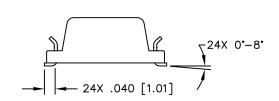

DIMENSIONS ARE IN INCH [MILLIMETERS] WITH THE FOLLOWING TOLERANCES: [MILLIMETER] ARE FOR REFERENCE ONLY. .XX=  $\pm$ .01 [ $\pm$ 0.25] .XXX=  $\pm$ .005 [ $\pm$ 0.13]

@ Copyright, 2015. Pulse Electronics Corp. All rights reserved. Pulse confidential & proprietary. (09/21/15)

PRODUCT DESCRIPTION	TLA DRAWING	PS DRAWING	SHEET	PART NO.	DATASHEET REV.
MDL,SIN,1GD,1:1,SM,TU	HX5084FNL-11	PS-2759.001-A	3 OF 3	HX5084FNL	D

## **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Audio Transformers / Signal Transformers category:

Click to view products by Pulse manufacturer:

Other Similar products are found below:

CX2041NLT MGPWT-00449-P PE-64961 H1302FNLT H5008FNL H5012FNL H5020FNLT H5077NLT H5079NLT H5084FNLT

B78476A9558A003 1812WBT2-4 1879479-1 HX2260FNL HX5014FNL EX2024FNL FL1066 T1137NLT T3012NL PE-65812FNL PE65848FNLT H1174FNL H1302FNL H5015FNL H5019EFNL H5062FNLT CX2047LNL MGPWT-00059-P MGPWT-00266-P MGPWT00278-P MGPWT-00431-P TTC-100 TTC-143-H TTC-5032-1 BX1194WNLT HX1234NLT HX5008FNLT HX5019FNL HX5084NL 31879385-5 TX1263NLT 4-1879391-0 T1142NL HX6101FNL HX5084FNL HX1148NL HX5020FNLT HX5014FNLT T1124NL
1879732-1