



All Larsen NMOHF (high frequency 27 MHz to 6 GHz) mounts convert from low frequency applications to high frequency applications and back by pulling or replacing the center pin and insulator.

NMOHF mounts require a 3/4" hole for mounting and include 17' of coax. NMOHF mounts accommodate roof surfaces from 0.1" to .03". NMOHFTHK (thick) mounts accommodates roof surfaces up to 1/2" thick.

## NMO 3/4" HIGH FREQUENCY MOUNTS

Model	Coax	Connector
*NMOKHFCX	CX (RG-58A/U)	No Conn
*NMOKHFCXFME	CX (RG-58A/U)	FME CRIMP
*NMOKHFCXMPL	CX (RG-58A/U)	MPL
*NMOKHFCXPL	CX (RG-58A/U)	PL-259
*NMOKHFDS	DS (RG-58A/U Dual Shield)	No Conn
NMOKHFUD	UD (RG-58U Dual Shield)	No Conn
*NMOKHFUDFME	UD (RG-58U Dual Shield)	FME
*NMOKHFUDMPL	UD (RG-58U Dual Shield)	MPL
*NMOKHFUDSMA	UD (RG-58U Dual Shield)	SMA
*NMOKHFUDTNC	UD (RG-58U Dual Shield)	TNC
*NMOKHF200SMAI	LMR200	SMA Installed



## NMO 3/4" HIGH FREQUENCY MID-SIZE MOUNTS

Model	Coax	Connector
*NMOKHF MIDCX	CX (RG-58A/U)	No Conn
*NMOKHF MIDDS	DS (RG-58A/U Dual Shield, Low Loss)	No Conn
*NMOKHF MIDUD	UD (RG-58U, Dual Shield)	No Conn



## NMO 3/4" HIGH FREQUENCY THICK MOUNTS

Model	Coax	Connector
*NMOKHFCXTHK	CX (RG-58A/U)	No Conn
*NMOKHFDSTHK	DS (RG-58A/U Dual Shield)	No Conn

If your antenna has a "tab" or "pin" connector, use the NMOHF mount in the low frequency configuration - leave the center pin and insulator in place as it arrives from the factory.


If your antenna has a "high frequency" (HF) connector, use the NMOHF mount in the high frequency configuration - remove the center pin and insulator.



## NMO 3/4" STANDARD MOUNTS

NMO 3/4" standard mounts require a 3/4" hole for mounting and include 17' of coax.

Model	Coax	Connector
NMOKNOCONN	CX (RG-58A/U)	No Conn
*NMOK	CX (RG-58A/U)	PL-259
*NMOKFME	CX (RG-58A/U)	FME
*NMOKMPL	CX (RG-58A/U)	MPL Crimp
*NMOKDS	DS (RG-58A/U Dual Shield)	No Conn
*NMOKDSFME	DS (RG-58A/U Dual Shield)	FME
NMOKUD	UD (RG-58U Dual Shield)	No Conn
*NMOKUDFME	UD (RG-58U Dual Shield)	FME
*NMOKUDPL	UD (RG-58U Dual Shield)	PL-259T
*NMOKUDTNC	UD (RG-58U Dual Shield)	TNC

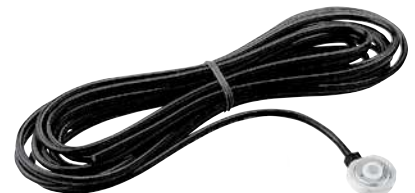



\*MADE IN THE USA

## CABLE ASSEMBLIES/MOUNTS



### NMO HIGH FREQUENCY MOUNTS

Model	Thickness	Cable
NMOHF	0.761-2.54 mm Standard	Not included
NMOHFMID	0.761 - 5.90 mm Mid-Thickness	Not included
NMOHFTHK	1.6 - 12.7 mm Greatest Thickness	Not included

**All Larsen NMOHF (high frequency 27 MHz to 6 GHz) mounts convert from low frequency applications to high frequency applications and back by pulling or replacing the center pin and insulator.**



### NMO HIGH FREQUENCY MAGNETIC MOUNTS

**NMOHF round magnetic mounts have the following specifications:**

**Size:** 3.5" Diameter  
**Cable Length:** 12'  
**Pull Strength:** 80 lbs

Model	Coax	Connector
*NMOMMRNOCONN	CX (RG-58A/U)	No Conn
*NMOMMR	CX (RG-58A/U)	58FCP
*NMOMMRFME	CX (RG-58A/U)	FME Crimp
*NMOMMRPL	CX (RG-58A/U)	PL-259
*NMOMMRMPL	CX (RG-58A/U)	MPL Crimp
*NMOMMRTNC	CX (RG-58A/U)	TNC Crimp
*NMOMMRBNC	CX (RG-58A/U)	BNC Crimp
*NMOMMRN	CX (RG-58A/U)	N Crimp
*NMOMMRDS	DS (RG-58A/U Dual Shield)	No Conn
*NMOMMRDSFME	DS (RG-58A/U Dual Shield)	FME
*NMOMMRDSMPL	DS (RG-58A/U Dual Shield)	MPL Crimp
*NMOMMRDSN	DS (RG-58A/U Dual Shield)	N Crimp
*NMOMMRDSSMA	DS (RG-58A/U Dual Shield)	SMA
*NMOMMRDSSMAR/P	DS (RG-58A/U Dual Shield)	SMARP
*NMOMMRDSPL	DS (RG-58A/U Dual Shield)	PL-259T
*NMOMMRDSTNC	DS (RG-58A/U Dual Shield)	TNC
*NMOMMT200NOCONN	LMR200	No Conn
*NMOMMR200SMA	LMR200	SMA
*NMOMMR200N	LMR200	N

### NMO 3/8" THICK MOUNTS

**NMO3/8" mounts have the following specifications:**

**Mounting:** 3/4" hole  
**Mounting Surface:** 0.15" to 0.22" thickness  
**Cable Length:** 17'



Model	Coax	Connector
*NMOKCX38THK	CX (RG-58A/U)	No Conn
*NMOKUD38THK	DS (RG-58A/U Dual Shield)	No Conn



All Larsen NMOHF (high frequency 27 MHz to 6 GHz) mounts convert from low frequency applications to high frequency applications and back by pulling or replacing the center pin and insulator.

## GPS LTE DIRECT MOUNTS

NMOHFGPS mounts have the following specifications:

<b>Frequency:</b>	1575.4 - 1576.4 MHz	<b>Gain:</b>	5 dBic
<b>Polarization:</b>	Right-Hand Circular / Vertical	<b>LNA Gain:</b>	26 dB ± 2 dB
<b>Cable:</b>	16.4' RG-174 (GPS)	<b>VSWR:</b>	Less than 2:1
	16.4' RG-58 (NMOHF)	<b>Size:</b>	.5 x 2 x 4.5
<b>Voltage:</b>	3 or 5 V DC	<b>Color:</b>	Black
<b>Mounting:</b>	5/8" Hole		



Model	Connectors
*NMOHFGPSFMENOCNN	FME/No Connector
*NMOHFGPSFMESMA	FME/SMA
*NMOHFGPSNOCNN	No Connectors
*NMOHFGPSSMASMA	SMA/SMA

**NOTE:** Specifications listed refer to GPS performance. Additional antenna specifications are dependent on the antenna mounted on the NMO side.

## NMO SQUARE MAGNETIC MOUNTS

NMO square magnetic mounts have the following specifications:

<b>Size:</b>	3.5" x 3"
<b>Cable Length:</b>	12'
<b>Pull Strength:</b>	50 lbs

Model	Coax	Connector
*NMOMMNOCONN	CX (RG-58A/U)	No Conn
*NMOMMMPL	CX (RG-58A/U)	MPL
*NMOMM	CX (RG-58A/U)	58FCP
*NMOMMBNC	CX (RG-58A/U)	BNC
*NMOMMPL	CX (RG-58A/U)	PL-259
*NMOMMFME	CX (RG-58A/U)	FME
*NMOMMDSFME	DS (RG-58A/U Dual Shield)	FME



## NMO TRUNK LID MOUNTS

NMO trunk lid mounts have the following specifications:

**Size:** 2.5" x 2"

Model	Coax	Cable Length	Connector
*NMOTLP	CX (RG-58A/U)	17 ft.	PL-259
*NMOTLPFME	CX (RG-58A/U)	17 ft.	FME
*NMOHFTLP200NF	LMR-200	17 ft.	N-Female
*NMOHFTLP200NF12	LMR-200	12 ft.	N-Female





\*MADE IN THE USA

## CABLE ASSEMBLIES/MOUNTS



### LM MOUNTS

Model	Coax	Connector
*LMKNOCONN	CX (RG-58A/U)	No Conn
*LMKFME	CX (RG-58A/U)	FME
*LMK	CX (RG-58A/U)	PL-259
*LMKDS	DS (RG-58A/U Dual Shield)	No Conn
*LMKDSFME	DS (RG-58A/U Dual Shield)	FME
LMKUD	UD (RG-58U Dual Shield)	No Conn
LMKUDFME	UD (RG-58U Dual Shield)	FME



### LMMM MAGNETIC MOUNTS

**LM magnetic mounts have the following specifications:**

**Size:** 3.5" x 3"      **Cable Length:** 12'  
**Type:** 5/16" x 24 THDS      **Pull Strength:** 50 lbs

Model	Coax	Connector
*LMMMFMFME	CX (RG-58A/U)	FME Crimp
*LMMMFMPL	CX (RG-58A/U)	MPL Crimp
*LMMM	CX (RG-58A/U)	58FCP
*LMMMFM BNC	CX (RG-58A/U)	BNC Crimp
*LMMMFMPL	CX (RG-58A/U)	PL-259
*LMMMFMDS	DS (RG-58A/U Dual Shield)	No Conn
*LMMMFMDSFME	DS (RG-58A/U Dual Shield)	FME



### LM TRUNK LID MOUNTS

**LM trunk lid mounts have the following specifications:**

**Size:** 2.5" x 2"      **Cable Length:** 17'  
**Type:** 5/16" x 24 THDS

Model	Coax	Connector
*LMTLP	CX (RG-58A/U)	PL-259
*LMTLPDS	DS (RG-58A/U Dual Shield)	Order Separately



### PO MOUNTS

Model	Coax	Connector
*POKNOCONN	CX (RG-58A/U)	No Conn



### PO MAGNETIC MOUNTS

**PO magnetic mounts have the following specifications:**

**Size:** 3.5" x 3"      **Cable Length:** 12'  
**Type:** SO-239 Female      **Pull Strength:** 50 lbs

Model	Coax	Connector
*POMM	CX (RG-58A/U)	58FCP

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Antenna Accessories](#) category:*

*Click to view products by [Pulse](#) manufacturer:*

Other Similar products are found below :

[AN102800V1](#) [HKIT-MTA9101-001](#) [CC.001](#) [NMOHPCN518](#) [MB830](#) [MB825](#) [LBT3800](#) [GRO](#) [172-00006](#) [V680-HS65-R](#) [12.5M](#) [W9909](#)  
[HKIT-MTA9100-001](#) [GBR817](#) [MABT8UM9](#) [HKIT-LPx-001](#) [QWRCB](#) [G8MI](#) [FMW4](#) [SMK](#) [GBF120](#) [CCT](#) [FM1](#) [GPS-17519](#) [76002093](#)  
[G8SMI](#) [MABT8M](#) [DELTA/MAGMOUNT/SMAF/SMAM/2M/19](#) [DELTA/MAGMOUNT/SMAFRP/SMAMRP/1M/19](#) [W9908](#) [LTE Antenna](#)  
[Kit](#) [SR4W030-150](#) [2740504](#) [SR4G031-100](#) [2702198](#) [SR4W030-100](#) [9091.99.0235](#) [LoRa Antenna](#) [CTC110](#) [EP-FMWFKITUPC01](#) [AS-](#)  
[ACC-SURVEYPOLE-00](#) [WAN07RSP](#) [WAN09RSP](#) [GM8B25](#) [G8XBI](#) [GM8PI25](#) [GM8TI](#) [GM8U](#) [G8TI](#) [GB8T](#) [LBT3400LS](#)