## **SMT Power Inductors**

Unshielded Drum Core - P0762NL Series









Height: 3.0mm Max

Footprint: 13.0mm x 9.4mm Max

@ Current Rating: up to 2.0A

@ Inductance Range: 10μH to 1000μH


Electrical Specifications @ 25°C – Operating Temperature -40°C to +130°C									
Part <sup>6,7</sup> Number	Inductance @ Ιρκ Αδος (μΗ ± 20%)	Irated <sup>5</sup> (A)	DCR (MAX) (mΩ)	Saturation Current (A) @ 25°C	Heating Current (A)				
P0762.103NL	10	2.0	110	2.4	2.0				
P0762.153NL	15	1.5	150	2.0	1.5				
P0762.223NL *	22	1.3	230	1.6	1.3				
P0762.333NL *	33	1.1	300	1.4	1.1				
P0762.473NL*	47	0.8	390	1.0	0.8				
P0762.683NL	68	0.7	660	0.9	0.7				
P0762.104NL	100	0.6	840	0.7	0.6				
P0762.154NL	150	0.5	1200	0.6	0.5				
P0762.224NL	220	0.4	1900	0.5	0.4				
P0762.334NL *	330	0.3	2700	0.4	0.3				
P0762.474NL*	470	0.2	4000	0.3	0.2				
P0762.684NL	680	0.1	5300	0.2	0.1				
P0762.105NL *	1000	0.05	8400	0.1	.05				


#### Notes:

- 1. The temperature of the component (ambient plus temperature rise) must be within the specified operating temperature range.
- 2. Inductance tested at 100kHz, 10mV<sub>RMS</sub>
- 3. Inductance drop = 10% typical at the Saturation Current
- 4.  $\Delta T = 15$ °C rise typical at the Heating Current
- 5. The rated current is the lower of the saturation or heating current
- Optional Tape & Reel packaging can be ordered by adding a "T" suffix to the part number (i.e. P0762.103NL becomes P0762.103NLT). Pulse complies to industry standard tape and reel specification EIA481.
- 7. The "NL" suffix indicates an RoHS-compliant part number. Non-NL suffixed parts are not necessarily RoHS compliant, but are electrically and mechanically equivalent to NL versions. If a part number does not have the "NL" suffix, but an RoHS compliant version is required, please contact Pulse for availability.
- \* Contact Pulse for availability

#### **Mechanical**

### Schemati

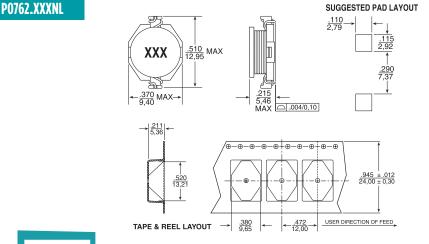



Dimensions: Inches

Unless otherwise specified, all tolerances are  $\pm \frac{.010}{0.25}$ 

power.pulseelectronics.com

SPM2007 07 (02/19) http://www.power.pulseelectronics.com/contact

# **SMT Power Inductors**

Unshielded Drum Core - P0762NL Series



Pulse Worldwide Headquarters 15255 Innovation Drive Ste 100 San Diego, CA 92128 U.S.A.	Pulse Europe Pulse Electronics GmbH Am Rottland 12 58540 Meinerzhagen Germany	Pulse China Headquarters Pulse Electronics (ShenZhen) CO., LTD D708, Shenzhen Academy of Aerospace Technology, The 10th Keji South Road, Nanshan District, Shenzhen, P.R. China 518057	Pulse North China Room 2704/2705 Super Ocean Finance Ctr. 2067 Yan An Road West Shanghai 200336 China	Pulse South Asia 3 Fraser Street 0428 DUO Tower Singapore 189352	Pulse North Asia 1F., No.111 Xiyuan Road Zhongli District Taoyuan City 32057 Taiwan (R.O.C)
---	---	--	--	---	---

Tel: 858 674 8100 Tel: 49 2354 777 100 Tel: 86 755 33966678 Tel: 65 6287 8998 Tel: 886 3 4356768 Tel: 86 21 62787060 Fax: 858 674 8262 Fax: 49 2354 777 168 Fax: 86 755 33966700 Fax: 65 6280 0080 Fax: 886 3 4356820 Fax: 86 2162786973

Performance warranty of products offered on this data sheet is limited to the parameters specified. Data is subject to change without notice. Other brand and product names mentioned herein may be trademarks or registered trademarks of their respective owners. © Copyright, 2019. Pulse Electronics, Inc. All rights reserved.

For More Information

## **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Inductor Kits & Accessories category:

Click to view products by Pulse manufacturer:

Other Similar products are found below:

B82498X001 EKDMGN08A-KIT EKDMGN011-KIT HCTI-HCTC-KIT EKDMAT02-KIT DK0051 EKDMAT04-KIT HCTC-KIT 744779

VLS6045EX-KIT VLS6045EX-H-KIT TFM201610ALMA-KIT VLS5045EX-KIT CP-P36/22-2S CPV-RM12/I-1S-12PD-TZ 744062

TSTH-MM TSTH-MS TTH 50-150 31743 WE-1413H WE-237 WE-2750H WE-279 WE-2886H WE-3671H WE-3683H WE-3686 WE3693 WE-3698H WE-3701H WE-3759 CPHS-EFD20/7-1S-10P E30-K-H-12P-SS-P3002 E65-54-K-H EE13-K-H-8P-SW EE13-K-V-10PSW EE25\_10\_6-K-V-10P-YW-360 EF12.6-K-H-9P-P1212 EF16-K-H-8P EF16-K-H-9P-SW EF20-K-H-8P EF20-K-H-8P-SW EFD12\_3.5
K-1S-8P-CPHS EFD15-K-10P-4S EFD25-K-10P-WZ7855 FIRCHK CLI-EFD25 TSTH-MD WE-3657H