





SMT POWER INDUCTORS

Unshielded Drum Core - PA0390NL Series



-  **Height:** 5.1mm Max
-  **Footprint:** 8.89mm x 6.10mm Max
-  **Current Rating:** up to 6.0A
-  **Inductance Range:** 0.6 μ H to 113 μ H


Electrical Specifications @ 25°C — Operating Temperature -40°C to +130°C

Part ^{6,7} Number	Inductance @ I _{RK} A _{DC} (μ H \pm 20%)	I _{rated} ⁵ (A)	DCR (MAX) (m Ω)	Saturation Current (A) @ 25°C	Heating Current (A)
PA0390.471NL	0.6	6	9.7	7.7	6
PA0390.102NL	1.2	4.4	17.7	5.3	4.4
PA0390.152NL	1.6	4.2	20	4.5	4.2
PA0390.222NL	2.6	3.1	36.3	3.5	3.1
PA0390.332NL	3.8	2.9	42.8	3	2.9
PA0390.472NL	5.2	2.2	54.4	2.6	2.2
PA0390.682NL	6.9	1.7	89.7	2.2	1.7
PA0390.103NL	11	1.5	110.7	1.9	1.5
PA0390.153NL	16	1.2	174.7	1.5	1.2
PA0390.223NL	23	1	254.1	1.2	1
PA0390.333NL	36	0.82	367	0.99	0.82
PA0390.473NL	48	0.72	474	0.87	0.72
PA0390.683NL	73	0.58	732	0.67	0.58
PA0390.104NL	113	0.47	1109	0.53	0.47

- NOTES:**
- The temperature of the component (ambient plus temperature rise) must be within the specified operating temperature range.
 - Inductance tested at 100kHz, 250mV_{RMS}
 - Inductance drop = 10% typical at the Saturation Current.
 - $\Delta T = 40^\circ\text{C}$ rise typical at the Heating Current
 - The rated current is the lower of the saturation or heating current.
 - Optional Tape & Reel packaging can be ordered by adding a "T" suffix to the part number (i.e. PA0390.102NL becomes PA0390.102NLT). Pulse complies to industry standard tape and reel specification EIA481.
 - The "NL" suffix indicates an RoHS-compliant part number. Non-NL suffixed parts are not necessarily RoHS compliant, but are electrically and mechanically equivalent to NL versions. If a part number does not have the "NL" suffix, but an RoHS compliant version is required, please contact Pulse for availability.

Mechanical

Schematic

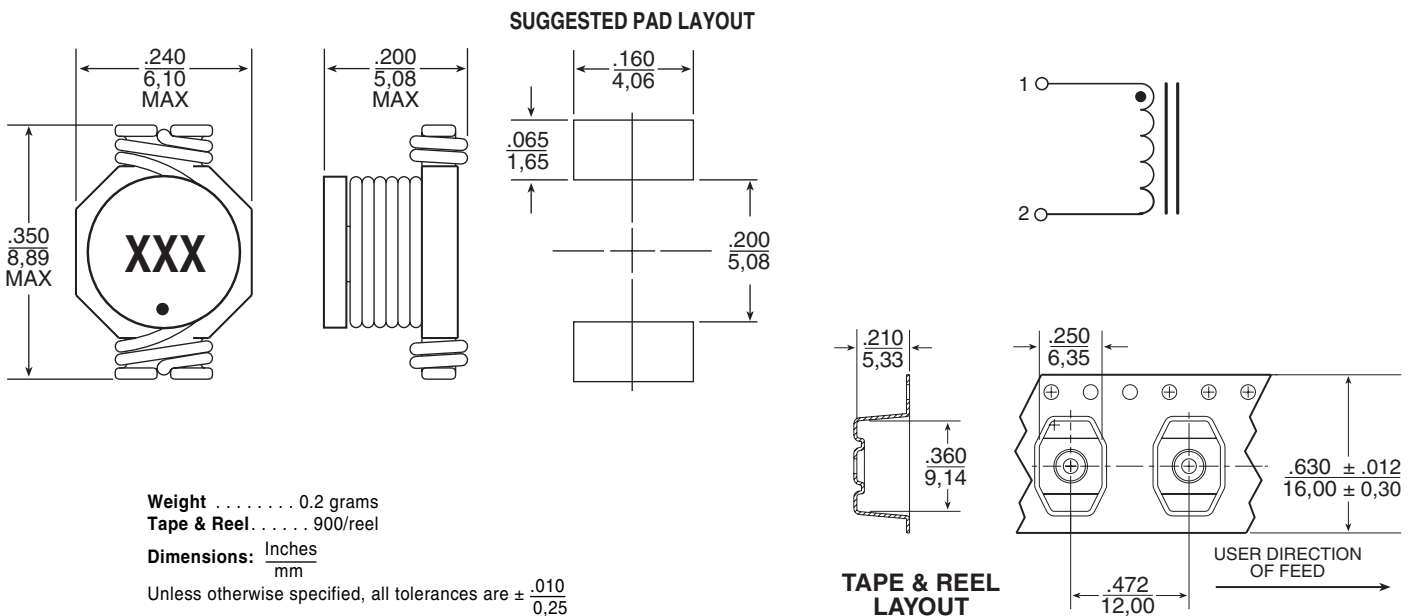

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Fixed Inductors](#) category:

Click to view products by [Pulse manufacturer](#):

Other Similar products are found below :

[MLZ1608M6R8WTD25](#) [MLZ1608N6R8LT000](#) [MLZ1608N3R3LTD25](#) [MLZ1608N3R3LT000](#) [MLZ1608N150LT000](#)

[MLZ1608M150WTD25](#) [MLZ1608M3R3WTD25](#) [MLZ1608M3R3WT000](#) [MLZ1608M150WT000](#) [MLZ1608A1R5WT000](#)

[MLZ1608N1R5LT000](#) [B82432C1333K000](#) [PCMB053T-1R0MS](#) [PCMB053T-1R5MS](#) [PCMB104T-1R5MS](#) [CR32NP-100KC](#) [CR32NP-](#)

[151KC](#) [CR32NP-180KC](#) [CR32NP-181KC](#) [CR32NP-1R5MC](#) [CR32NP-390KC](#) [CR32NP-3R9MC](#) [CR32NP-680KC](#) [CR32NP-820KC](#)

[CR32NP-8R2MC](#) [CR43NP-390KC](#) [CR43NP-560KC](#) [CR43NP-680KC](#) [CR54NP-181KC](#) [CR54NP-470LC](#) [CR54NP-820KC](#) [CR54NP-8R5MC](#)

[MGDQ4-00004-P](#) [MGDU1-00016-P](#) [MHL1ECTTP18NJ](#) [MHL1JCTTD12NJ](#) [PE-51506NL](#) [PE-53601NL](#) [PE-53630NL](#) [PE-53824SNLT](#) [PE-](#)

[62892NL](#) [PE-92100NL](#) [PG0434.801NLT](#) [PG0936.113NLT](#) [PM06-2N7](#) [PM06-39NJ](#) [HC2LP-R47-R](#) [HC2-R47-R](#) [HC3-2R2-R](#) [HC8-1R2-R](#)