# **SMT Power Inductors**

Planar - PA1X9XNL Series











*Peight:* 7.4mm

**@ Footprint:** 19.8mm x 19.6mm Max

Current Rating: up to 73A

**Inductance Range:** .405µH to 6.2µH

Electrical Specifications @ 25°C – Operating Temperature –40°C to +130°C8										
Part <sup>5,7</sup> Number	Inductance @ Irated (μH ± 15%)	<b>Irated¹</b> (ADC)	$\text{DCR}(\text{m}\Omega)$		Inductance	Saturation Current <sup>2</sup>		Heating		
			ТҮР	MAX	<b>@ 0 Α</b> σ (μΗ ± 15%)	25°C	100°C	<b>Current³</b> (A)		
2-Turn (Low-Loss) Series										
PA1294.450NL	0.45	73	.38	.48	0.45	95	80	73		
PA1294.650NL	0.63	54	.38	.48	0.65	63	53	73		
PA1294.910NL	0.85	39	.38	.48	0.91	46	37	73		
PA1294.112NL	1.05	30	.38	.48	1.10	35	30	73		
PA1294.132NL	1.25	25	.38	.48	1.30	29	26	73		
PA1294.152NL	1.45	21	.38	.48	1.50	24	22	73		
2-Turn Series										
PA1292.450NL *	0.45	52	.78	.98	0.45	95	80	52		
PA1292.650NL	0.63	52	.78	.98	0.65	63	53	52		
PA1292.910NL *	0.85	39	.78	.98	0.91	46	37	52		
PA1292.112NL	1.05	30	.78	.98	1.10	35	30	52		
PA1292.132NL	1.25	25	.78	.98	1.30	29	26	52		
PA1292.152NL *	1.45	21	.78	.98	1.50	24	22	52		
3-Turn Series										
PA1393.102NL	0.95	42	1.15	1.43	1.0	68	54	42		
PA1393.152NL	1.40	36	1.15	1.43	1.5	43	35	42		
PA1393.202NL	1.90	25	1.15	1.43	2.0	29	25	42		
PA1393.252NL	2.40	20	1.15	1.43	2.5	23	21	42		
PA1393.302NL	2.80	15	1.15	1.43	3.0	18	16	42		
PA1393.352NL	3.40	12	1.15	1.43	3.5	15	13	42		
4-Turn Series										
PA1494.162NL	1.60	37	1.44	1.80	1.60	55	43	37		
PA1494.242NL	2.40	30	1.44	1.80	2.42	35	27	37		
PA1494.362NL	3.30	17	1.44	1.80	3.60	20	18	37		
PA1494.442NL	4.00	14	1.44	1.80	4.40	16	15	37		
PA1494.532NL	4.90	11	1.44	1.80	5.34	13	12	37		
PA1494.622NL	5.80	9	1.44	1.80	6.20	11	10	37		

### **SMT Power Inductors**


Planar - PA1X9XNL Series

#### Notes:


- 1. The rated current as listed is either 85% of the saturation current or the heating current, depending on which value is lower.
- 2. The saturation current is the current which causes the inductance to drop by 15% at the stated ambient temperatures (25°C and 100°C). This current is determined by placing the component in the specified ambient environment and applying a short duration pulse current (to eliminate self-heating effects) to the component.
- 3. The heating current is the DC current which causes the temperature of the part to increase by approximately 45°C. This current is determined by mounting the component on a PCB with .25" wide, 2 oz. equivalent copper traces, and applying the current to the device for 30 minutes with no forced air cooling.
- 4. In high volt\*time applications, additional heating in the component can occur due to core losses in the inductor which may necessitate derating the current in order to limit the temperature rise of the component. In order to determine the approximate

- Pulse A YAGEO Company
- total losses (or temperature rise) for a given application, the total copper and core losses should be taken into account. For approximate value of core losses, in a given application, use the core loss graph on page 24.
- Optional Tape & Reel packaging can be ordered by adding a "T" suffix to the part number (i.e. PA1294.450NL becomes PA1294.450NLT). Pulse complies to industry standard tape and reel specification EIA481.
- 6. Meets solderability test per IPC/EIA J-STD-002B using flux type ORLO.
- 7. The "NL" suffix indicates an RoHS-compliant, but are electrically and mechanically equivalent to NL versions. If a part number does not have the "NL" suffix, but an RoHS compliant version is required, please contact Pulse for availability.
- 8. The temperature of the component (ambient plus temperature rise) must be within the stated operating temperature range.
  - \* Contact Pulse for availability

### Mechanical

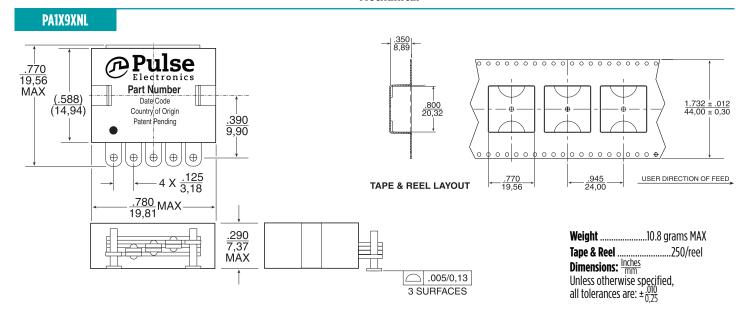


### **Suggested Pad Layouts and Schematics**

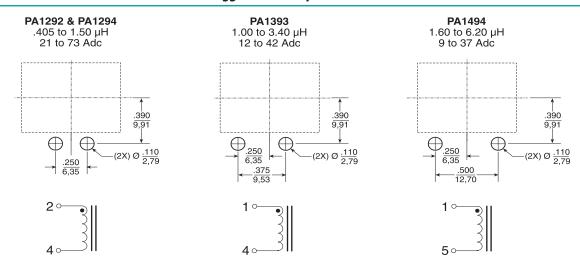






### Inductance vs. Current Characteristics (25°C)

### PA1X9XNL

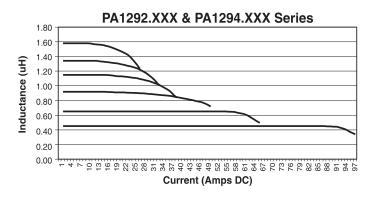


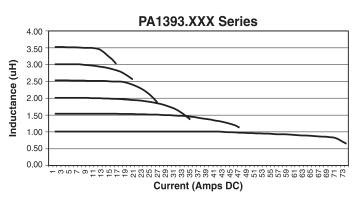



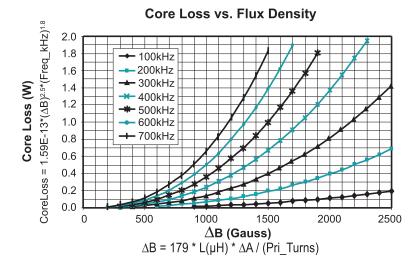

### Temperature Rise vs. Power (W) Dissipation



Total Power Dissipation = Copper Loss (W) + Core Loss (W)

Copper Loss (W) = Current (rms)<sup>2</sup> \* DCR (m $\Omega$ ) / 1000 Core Loss (W) = per table

## **SMT Power Inductors**

Planar - PA1X9XNL Series



For More Information	n				
Pulse Worldwide Headquarters 15255 Innovation Drive Ste 100 San Diego, CA 92128 U.S.A.	Pulse Europe Pulse Electronics GmbH Am Rottland 12 58540 Meinerzhagen Germany	Pulse China Headquarters Pulse Electronics (ShenZhen) CO., LTD D708, Shenzhen Academy of Aerospace Technology, The 10th Keji South Road, Nanshan District, Shenzhen, P.R. China 518057	Pulse North China Room 2704/2705 Super Ocean Finance Ctr. 2067 Yan An Road West Shanghai 200336 China	Pulse South Asia 3 Fraser Street 0428 DUO Tower Singapore 189352	Pulse North Asia 1F., No.111 Xiyuan Road Zhongli District Taoyuan City 32057 Taiwan (R.O.C)
Tel: 858 674 8100 Fax: 858 674 8262	Tel: 49 2354 777 100 Fax: 49 2354 777 168	Tel: 86 755 33966678 Fax: 86 755 33966700	Tel: 86 21 62787060 Fax: 86 2162786973	Tel: 65 6287 8998 Fax: 65 6280 0080	Tel: 886 3 4356768 Fax: 886 3 4356820

Performance warranty of products offered on this data sheet is limited to the parameters specified. Data is subject to change without notice. Other brand and product names mentioned herein may be trademarks or registered trademarks of their respective owners. © Copyright, 2019. Pulse Electronics, Inc. All rights reserved.

## **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Fixed Inductors category:

Click to view products by Pulse manufacturer:

Other Similar products are found below:

CR43NP-680KC CR54NP-820KC CR54NP-8R5MC CTX32CT-100 70F224AI MGDQ4-00004-P MHL1ECTTP18NJ MHL1JCTTD12NJ PE-51506NL PE-53601NL PE-53602NL PE-53630NL PE-53824SNLT PE-62892NL PE-92100NL PG0434.801NLT PG0936.113NLT 9310-16 PM06-2N7 PM06-39NJ A01TK 1206CS-471XJ HC2-2R2TR HC2LP-R47-R HC3-2R2-R 1206CS-151XG RCH664NP-140L RCH664NP-4R7M RCH8011NP-221L RCP1317NP-332L RCP1317NP-391L RCR1010NP-470M RCR110DNP-331L DH2280-4R7M DS1608C-106 ASPI-4020HI-R10M-T B10TJ B82477P4333M B82498B3101J000 B82498B3680J000 ELJ-RE27NJF2 1812CS-153XJ 1812CS-183XJ 1812CS-223XJ 1812LS-104XJ 1812LS-105XJ 1812LS-124XJ 1812LS-154XJ 1812LS-223XJ 1812LS-224XJ