

non-QPL MIL-STD-1553 INTERFACE TRANSFORMERS

Pulse Specialty Components

Two Pearl Buck Court

Bristol, PA 19007-6812

Tel 215-781-6400 ■ Fax 215-781-6403

www.pulsespecialty.com

For QPL pulse transformers....

In addition to the non-QPL transformers described in this catalog, Pulse Specialty Components offers many transformer models qualified for QPL/military applications. These include:

- surface-mount or through-the-board
- single- or dual-ratio

For more information, ask for our catalog entitled
“*QPL MIL-STD-1553 INTERFACE TRANSFORMERS*”



As part of Pulse, Specialty Components has access to offshore manufacturing, state-of-the-art packaging technology and worldwide purchasing power to provide extremely cost-effective products for customers. Many low-power pulse transformer products have been developed in response to the Perry Initiative and its COTs mandate.

The products shown on the next page and described in this catalog have performance and electrical characteristics compliant with MIL-PRF-21038/27 but have been tailored in response to the demands of today's marketplace....


- COTs models for reduced-requirement military applications (non-QPL) and reduced cost
- Low profile for reduced board-stacking height
- Single- ratio and dual-ratio
- Single interface and dual interface
- Vertically stacked dual interface
- 0-70^oC or -40 to +85^oC or -55 to +125^oC
- Hermetically sealed for extreme environments

Browse the next page to find and select the product that meets your non-QPL requirements. Request our catalog on QPL MIL-PRF-21038 transformers for applications calling for QPL components.






Contents




pg 4

- low profile
- dual ratio
- through the board




pg 6

- low profile
- dual ratio
- surface-mount flat pack




pg 6

- low profile
- dual ratio
- surface-mount gull wing




pg 8

- dual interface
- low profile
- dual ratio
- through the board




pg 10

- dual interface
- low profile
- dual ratio
- surface-mount flat pack




pg 10

- dual interface
- low profile
- dual ratio
- surface-mount gull wing




pg 12

- dual interface
- stacked
- dual ratio
- through the board



pg 14


- dual interface
- stacked
- dual ratio
- surface-mount flat pack



pg 14

- dual interface
- stacked
- dual ratio
- surface-mount gull wing


Hermetically Sealed



pg 16

- single interface
- dual ratio
- surface-mount flat pack

Value Series -- COTS



pg 18


- standard profile
- dual ratio
- through the board

QPL COTS The package shown here as "Value Series COTS" is also available fully qualified to MIL-PRF-21038/27 requirements.



Through the board low profile MIL-PRF-21038 Interface Transformers

These non-QPL interface transformers are built and tested in ISO 9002 approved facilities. They conform to all electrical and physical parameters of MIL-PRF-21038/27. Choose one of three operating temperature ranges including 0° to +70° C, -40° to +85° C, or -55° to +125° C.



- dual ratio, single interface (see schematic)
- through the board package
- for use in MIL-STD-1553 applications
- low profile, 0.155 in. height
- performance to MIL-PRF-21038/27 requirements
- built in ISO 9002 facility

operating temp.	prefix
0° to 70°C	TLC
-40° to +85°C	TLN
-55° to +125°C	TL

APPLICABLE SPECIFICATIONS

- MIL-STD-1553B
- MIL-STD-202
- MIL-T-10727
- MIL-PRF-21038
- ISO 9002

SUMMARY PERFORMANCE SPECIFICATIONS

Impedance.....	see table, next page
Droop.....	≤ 20%
Overshoot.....	± 1V max
Common mode rejection (CMR).....	≥ 45 dB
Frequency range (no load).....	75 kHz to 1MHz
Operating temperature range.....	see table, next page
Weight.....	≤ 5 grams
Insulation resistance (min).....	10K megohms @ 250 Vdc
Dielectric withstanding voltage.....	100 Vrms






CHARACTERISTICS

PART NO.	TERMINALS	RATIO (±3%)	RDC (ohms) MAX.	IMPEDANCE (ohms) MIN.
(XXX)1553-1 ¹	1-3:4-8 1-3:5-7	1CT:1CT 1CT:.707CT	1-3 = 3.0 4-8 = 3.0	(1-3) 4,000
(XXX)1553-2	1-3:4-8 1-3:5-7	1.4CT:1CT 2CT:1CT	1-3 = 3.5 4-8 = 3.0	(1-3) 7,200
(XXX)1553-3	1-3:4-8 1-3:5-7	1.25CT:1CT 1.66CT:1CT	1-3 = 3.2 4-8 = 3.0	(1-3) 4,000
(XXX)1553-5 ²	1-3:4-8 1-3:5-7	1CT:2.12CT 1CT:1.5CT	1-3 = 1.0 4-8 = 3.5	(4-8) 4,000
(XXX)1553-45 ²	1-3:4-8 1-3:5-7	1CT:2.5CT 1CT:1.79CT	1-3 = 1.0 4-8 = 3.5	(4-8) 4,000

- low profile
- dual ratio
- through the board

- ¹ Refer to prefix table (right) to select temperature range.
- ² Designed for transceivers utilizing a single supply voltage (+5V).

operating temp.	prefix
0° to 70°C	TLC
-40° to +85°C	TLN
-55° to +125°C	TL

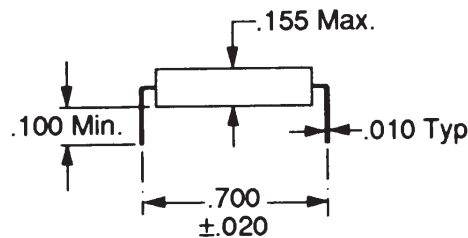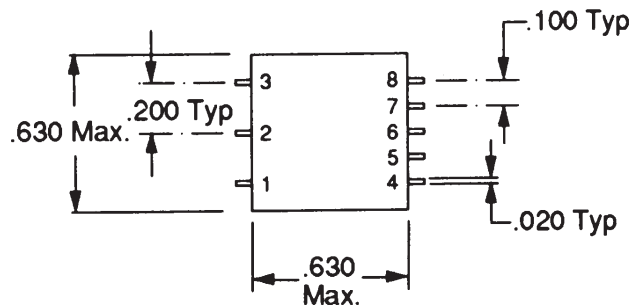

Notes:

1. All dimensions are in inches.
2. Tolerances: .xx = +.008
3. All specifications and dimensions are subject to change without notice.




Surface mount low profile MIL-PRF-21038 Interface Transformers


These non-QPL interface transformers are built and tested in ISO 9002 approved facilities. They conform to all electrical and physical parameters of MIL-PRF-21038/27. Choose one of three operating temperature ranges including 0° to +70° C, -40° to +85° C, or -55° to +125° C.

- dual ratio, single interface (see schematic)
- surface mount; gull wing or flat pack
- for use in MIL-STD-1553 applications
- low profile, 0.155 in. height
- performance to MIL-PRF-21038/27 requirements
- built in ISO 9002 facility

operating temp.	gull wing package	flat pack
0° to 70°C	GLC	FLC
-40° to +85°C	GLN	FLN
-55° to +125°C	GL	FL



gull wing package



flat pack

APPLICABLE SPECIFICATIONS

- MIL-STD-1553B
- MIL-STD-202
- MIL-T-10727
- MIL-PRF-21038
- ISO 9002

SUMMARY PERFORMANCE SPECIFICATIONS

Impedance.....	see table, next page
Droop.....	≤ 20%
Overshoot.....	± 1V max
Common mode rejection (CMR).....	≥ 45 dB
Frequency range (no load).....	75 kHz to 1MHz
Operating temperature range.....	see table, next page
Weight.....	≤ 5 grams
Insulation resistance (min).....	10K megohms @ 250 Vdc
Dielectric withstanding voltage.....	100 Vrms



CHARACTERISTICS

PART NO.	TERMINALS	RATIO (±3%)	RDC (ohms) MAX.	IMPEDANCE (ohms) MIN.
(XXX1553-1) ¹	1-3:4-8 1-3:5-7	1CT:1CT 1CT:.707CT	1-3 = 3.0 4-8 = 3.0	(1-3) 4,000
(XXX1553-2)	1-3:4-8 1-3:5-7	1.4CT:1CT 2CT:1CT	1-3 = 3.5 4-8 = 3.0	(1-3) 7,200
(XXX1553-3)	1-3:4-8 1-3:5-7	1.25CT:1CT 1.66CT:1CT	1-3 = 3.2 4-8 = 3.0	(1-3) 4,000
(XXX1553-5) ²	1-3:4-8 1-3:5-7	1CT:2.12CT 1CT:1.5CT	1-3 = 1.0 4-8 = 3.5	(4-8) 4,000
(XXX1553-45) ²	1-3:4-8 1-3:5-7	1CT:2.5CT 1CT:1.79CT	1-3 = 1.0 4-8 = 3.5	(4-8) 4,000

- low profile
- dual ratio
- surface-mount




¹ Refer to prefix table (below) to select temperature range and package.

² Designed for transceivers utilizing a single supply voltage (+5V).


operating temp.	gull wing package	flat pack
0° to 70°C	GLC	FLC
-40° to +85°C	GLN	FLN
-55° to +125°C	GL	FL

Notes:

1. All dimensions are in inches.
2. Tolerances: .xx = +.008
3. All specifications and dimensions are subject to change without notice.

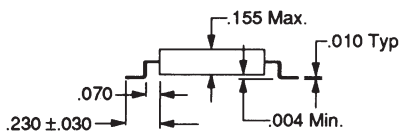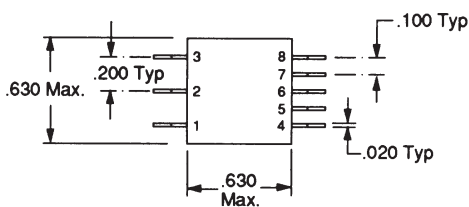

GL(X)1553-(X)




FL(X)1553-(X)



Through the board dual low profile MIL-PRF-21038 Interface Transformers

These non-QPL interface transformers are built and tested in ISO 9002 approved facilities. They conform to all electrical and physical parameters of MIL-PRF-21038/27. Choose one of three operating temperature ranges, including 0° to +70° C, -40° to +85° C, or -55° to +125° C.



- dual ratio, dual interface (see schematic)
- through the board package
- for use in MIL-STD-1553 applications
- low profile, 0.155 in. height
- performance to MIL-PRF-21038/27 requirements
- built in ISO 9002 facility

operating temp.	prefix
0° to 70°C	DTLC
-40° to +85°C	DTLN
-55° to +125°C	DTL

APPLICABLE SPECIFICATIONS

- MIL-STD-1553B
- MIL-STD-202
- MIL-T-10727
- MIL-PRF-21038
- ISO 9002

SUMMARY PERFORMANCE SPECIFICATIONS

Impedance.....	see table, next page
Droop.....	≤ 20%
Overshoot.....	± 1V max
Common mode rejection (CMR).....	≥ 45 dB
Frequency range (no load).....	75 kHz to 1MHz
Operating temperature range.....	see table, next page
Weight.....	≤ 5 grams
Insulation resistance (min).....	10K megohms @ 250 Vdc
Dielectric withstanding voltage.....	100 Vrms



CHARACTERISTICS

PART NO.	TERMINALS	RATIO (±3%)	RDC (ohms) MAX.	IMPEDANCE (ohms) MI
(XXXX)1553-1 ¹	1-3:16-13 5-7:12-9	1CT:1CT	1-3, 5-7 = 3.0 16-13, 12-9 = 3.0	(1-3, 5-7) 4,000
	1-3:15-14 5-7:11-10	1CT:.707CT		
(XXXX)1553-2	1-3:16-13 5-7:12-9	1.4CT:1CT	1-3, 5-7 = 3.5 16-13, 12-9 = 3.0	(1-3, 5-7) 7,200
	1-3:15-14 5-7:11-10	2CT:1CT		
(XXXX)1553-3	1-3:16-13 5-7:12-9	1.25CT:1CT	1-3, 5-7 = 3.2 16-13, 12-9 = 3.0	(1-3, 5-7) 4,000
	1-3:15-14 5-7:11-10	1.66CT:1CT		
(XXXX)1553-5 ²	1-3:16-13 5-7:12-9	1CT:2.12CT	1-3, 5-7 = 1.0 16-13, 12-9 = 3.5	(16-13, 12-9) 4,000
	1-3:15-14 5-7:11-10	1CT:1.5CT		
(XXXX)1553-45 ²	1-3:16-13 5-7:12-9	1CT:2.5CT	1-3, 5-7 = 1.0 16-13, 12-9 = 3.5	(16-13, 12-9) 4,000
	1-3:15-14 5-7:11-10	1CT:1.79CT		

- dual interface
- low profile
- dual ratio
- through the board




¹ Refer to prefix table (below) to select temperature range.

² Designed for transceivers utilizing a single supply voltage (+5V).

operating temp.	prefix
0° to 70°C	DTLC
-40° to +85°C	DTLN
-55° to +125°C	DTL

Notes:

1. All dimensions are in inches.
2. Tolerances: .xx = +.008
3. All specifications and dimensions are subject to change without notice.

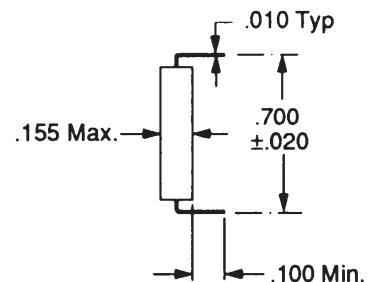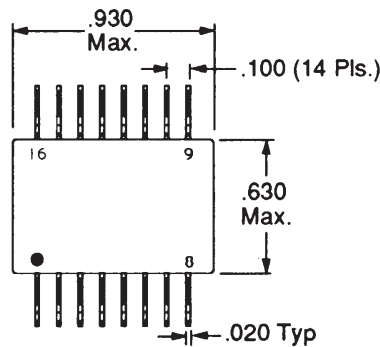





Surface mount dual low profile MIL-PRF-21038 Interface Transformers

These non-QPL interface transformers are built and tested in ISO 9002 approved facilities. They conform to all electrical and physical parameters of MIL-PRF-21038/27. Choose one of three operating temperature ranges, including 0° to +70° C, -40° to +85° C, or -55° to +125° C.

- dual ratio, dual interface (see schematic)
- for use in MIL-STD-1553 applications
- low profile, 0.155 in. height
- dual ratio in a single package
- performance to MIL-PRF-21038/27 requirements
- built in ISO 9002 facility
- three available operating temperatures; two packages:



gull wing package



flat pack

operating temp.	gull wing package	flat pack
0° to 70°C	DGLC	DFLC
-40° to +85°C	DGLN	DFLN
-55° to +125°C	DGL	DFL

APPLICABLE SPECIFICATIONS

- MIL-STD-1553B
- MIL-STD-202
- MIL-T-10727
- MIL-PRF-21038
- ISO 9002

SUMMARY PERFORMANCE SPECIFICATIONS

Impedance.....	see table, next page
Droop.....	≤ 20%
Overshoot.....	± 1V max
Common mode rejection (CMR).....	≥ 45 dB
Frequency range (no load).....	75 kHz to 1MHz
Operating temperature range.....	see table, next page
Weight.....	≤ 5 grams
Insulation resistance (min).....	10K megohms @ 250 Vdc
Dielectric withstanding voltage.....	100 Vrms

CHARACTERISTICS


PART NO.	TERMINALS	RATIO (±3%)	RDC (ohms) MAX.	IMPEDANCE (ohms) MIN.
(XXXX1553-1) ¹	1-3:16-13 5-7:12-9	1CT:1CT	1-3, 5-7 = 3.0 16-13, 12-9 = 3.0	(1-3, 5-9) 4,000
	1-3:15-14 5-7:11-10	1CT:.707CT		
(XXXX1553-2)	1-3:16-13 5-7:12-9	1.4CT:1CT	1-3, 5-7 = 3.5 16-13, 12-9 = 3.0	(1-3, 5-7) 7,200
	1-3:15-14 5-7:11-10	2CT:1CT		
(XXXX1553-3)	1-3:16-13 5-7:12-9	1.25CT:1CT	1-3, 5-7 = 3.2 16-13, 12-9 = 3.0	(1-3, 5-7) 4,000
	1-3:15-14 5-7:11-10	1.66CT:1CT		
(XXXX1553-5) ²	1-3:16-13 5-7:12-9	1CT:2.12CT	1-3, 5-7 = 1.0 16-13, 12-9 = 3.5	(16-13, 12-9) 4,000
	1-3:15-14 5-7:11-10	1CT:1.5CT		
(XXXX1553-45) ²	1-3:16-13 5-7:12-9	1CT:2.5CT	1-3, 5-7 = 1.0 16-13, 12-9 = 3.5	(16-13, 12-9) 4,000
	1-3:15-14 5-7:11-10	1CT:1.79CT		

- dual interface
- low profile
- dual ratio
- surface-mount

¹ Refer to prefix table (below) to select temperature range and package.




² Designed for transceivers utilizing a single supply voltage (+5V).

operating temp.	gull wing package	flat pack
0° to 70°C	DGLC	DFLC
-40° to +85°C	DGLN	DFLN
-55° to +125°C	DGL	DFL



Notes:

1. All dimensions are in inches.
2. Tolerances: .xx = +.008
3. All specifications and dimensions are subject to change without notice.

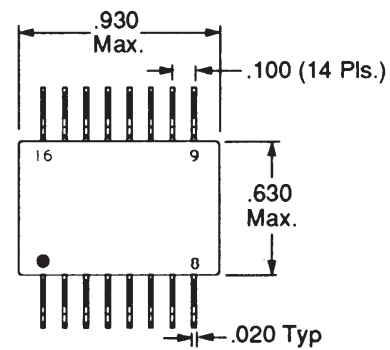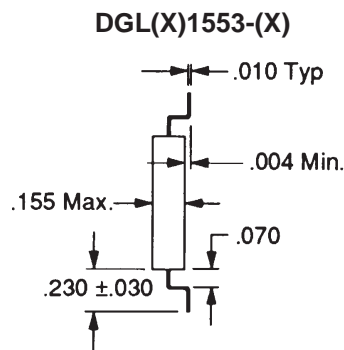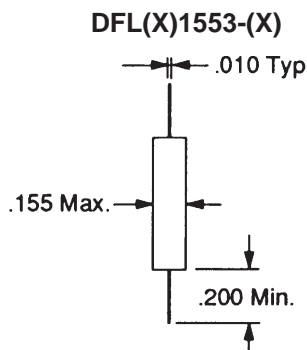




Through the board dual stacked MIL-PRF-21038 Interface Transformers

These non-QPL interface transformers are built and tested in ISO 9002 approved facilities. They conform to all electrical and physical parameters of MIL-PRF-21038/27. Choose one of three operating temperature ranges, including 0° to +70° C, -40° to +85° C, or -55° to +125° C.

- dual ratio, dual interface (see schematic)
- through the board package
- for use in MIL-STD-1553 applications
- vertically stacked for minimum XY area
- performance to MIL-PRF-21038/27 requirements
- built in ISO 9002 facility



operating temp.	prefix
0° to 70°C	STQC
-40° to +85°C	STQN
-55° to +125°C	STQ

APPLICABLE SPECIFICATIONS

- MIL-STD-1553B
- MIL-STD-202
- MIL-T-10727
- MIL-PRF-21038
- ISO 9002

SUMMARY PERFORMANCE SPECIFICATIONS

Impedance.....	see table, next page
Droop.....	≤ 20%
Overshoot.....	± 1V max
Common mode rejection (CMR).....	≥ 45 dB
Frequency range (no load).....	75 kHz to 1MHz
Operating temperature range.....	see table, next page
Weight.....	≤ 5 grams
Insulation resistance (min).....	10K megohms @ 250 Vdc
Dielectric withstanding voltage.....	100 Vrms




CHARACTERISTICS

PART NO.	TERMINALS	RATIO (±3%)	RDC (ohms) MAX	IMPEDANCE (ohms) MIN
(XXXX)1553-1 ¹	1-3:4-8 (11-13:14-18) 1-3:5-7 (11-13:15-17)	1CT:1CT 1.41CT:1CT	1-3 (11-13) 3.5 4-8 (14-18) 3.0	(1-3 & 11-13) 4,000
(XXXX)1553-2	1-3:4-8 (11-13:14-18) 1-3:5-7 (11-13:15-17)	1.4CT:1CT 2CT:1CT	1-3 (11-13) 3.0 4-8 (14-18) 3.0	(1-3 & 11-13) 7,200
(XXXX)1553-3	1-3:4-8 (11-13:14-18) 1-3:5-7 (11-13:15-17)	1.25CT:1CT 1.66CT:1CT	1-3 (11-13) 3.2 4-8 (14-18) 3.0	(1-3 & 11-13) 4,000
(XXXX)1553-5 ²	1-3:4-8 (11-13:14-18) 1-3:5-7 (11-13:15-17)	1CT:2.12CT 1CT:1.5CT	1-3 (11-13) 1.0 4-8 (14-18) 3.5	(4-8 & 14-18) 4,000
(XXXX)1553-45 ²	1-3:4-8 (11-13:14-18) 1-3:5-7 (11-13:15-17)	1CT:2.5CT 1CT:1.79CT	1-3 (11-13) 1.0 4-8 (14-18) 3.5	(4-8 & 14-18) 4,000




- dual interface
- stacked
- dual ratio
- through the board

- ¹ Refer to prefix table (below) to select temperature range and package.
² Designed for transceivers utilizing a single supply voltage (+5V).

operating temp.	prefix
0° to 70°C	STQC
-40° to +85°C	STQN
-55° to +125°C	STQ

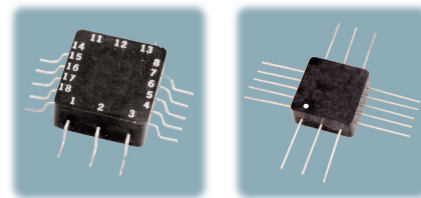

Also available in gull wing and flat pack configurations for surface mounting




- Notes:**
1. All dimensions are in inches.
 2. Tolerances: .xx = +.008
 3. All specifications and dimensions are subject to change without notice.


Surface mount dual stacked MIL-PRF-21038 Interface Transformers

These non-QPL interface transformers are built and tested in ISO 9002 approved facilities. They conform to all electrical and physical parameters of MIL-PRF-21038/27. Choose one of three operating temperature ranges, including 0° to +70° C, -40° to +85° C, or -55° to +125° C.

- dual ratio, dual interface (see schematic)
- surface mount packages
- for use in MIL-STD-1553 applications
- vertically stacked for minimum XY area
- performance to MIL-PRF-21038/27 requirements
- built in ISO 9002 facility



gull wing package



flat pack

operating temp.	gull wing package	flat pack
0° to 70°C	SGQC	SFQC
-40° to +85°C	SGQN	SFQN
-55° to +125°C	SGQ	SFQ

APPLICABLE SPECIFICATIONS

- MIL-STD-1553B
- MIL-STD-202
- MIL-T-10727
- MIL-PRF-21038
- ISO 9002

SUMMARY PERFORMANCE SPECIFICATIONS

Impedance.....	see table, next page
Droop.....	≤ 20%
Overshoot.....	± 1V max
Common mode rejection (CMR).....	≥ 45 dB
Frequency range (no load).....	75 kHz to 1MHz
Operating temperature range.....	see table, next page
Weight.....	≤ 5 grams
Insulation resistance (min).....	10K megohms @ 250 Vdc
Dielectric withstanding voltage.....	100 Vrms

CHARACTERISTICS

PART NO.	TERMINALS	RATIO (±3%)	RDC (ohms) MAX	IMPEDANCE (ohms) MIN
(XXXX)1553-1 ¹	1-3:4-8 (11-13:14-18) 1-3:5-7 (11-13:15-17)	1CT:1CT 1.41CT:1CT	1-3 (11-13) 3.5 4-8 (14-18) 3.0	(1-3 & 11-13) 4,000
(XXXX)1553-2	1-3:4-8 (11-13:14-18) 1-3:5-7 (11-13:15-17)	1.4CT:1CT 2CT:1CT	1-3 (11-13) 3.0 4-8 (14-18) 3.0	(1-3 & 11-13) 7,200
(XXXX)1553-3	1-3:4-8 (11-13:14-18) 1-3:5-7 (11-13:15-17)	1.25CT:1CT 1.66CT:1CT	1-3 (11-13) 3.2 4-8 (14-18) 3.0	(1-3 & 11-13) 4,000
(XXXX)1553-5 ²	1-3:4-8 (11-13:14-18) 1-3:5-7 (11-13:15-17)	1CT:2.12CT 1CT:1.5CT	1-3 (11-13) 1.0 4-8 (14-18) 3.5	(4-8 & 14-18) 4,000
(XXXX)1553-45 ²	1-3:4-8 (11-13:14-18) 1-3:5-7 (11-13:15-17)	1CT:2.5CT 1CT:1.79CT	1-3 (11-13) 1.0 4-8 (14-18) 3.5	(4-8 & 14-18) 4,000

- dual interface
- stacked
- dual ratio
- surface mount


¹ Refer to prefix table (below) to select temperature range and package.

² Designed for transceivers utilizing a single supply voltage (+5V).

operating temp.	gull wing package	flat pack
0° to 70°C	SGQC	SFQC
-40° to +85°C	SGQN	SFQN
-55° to +125°C	SGQ	SFQ

Notes:

1. All dimensions are in inches.
2. Tolerances: .xx = +.008
3. All specifications and dimensions are subject to change without notice.

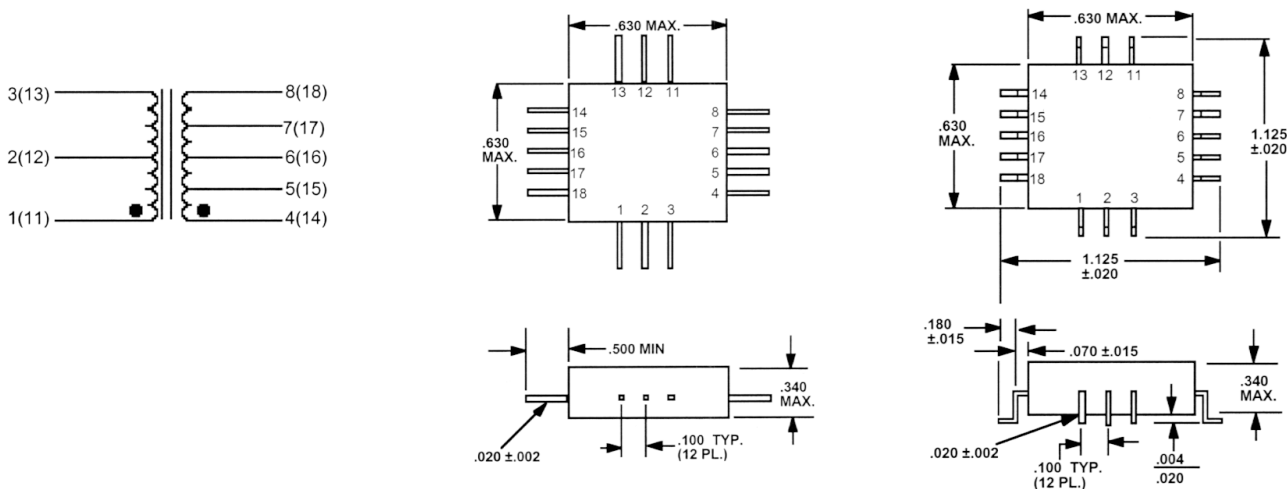




Surface mount hermetically sealed MIL-PRF-21038 Interface Transformers

These hermetically sealed non-QPL interface transformers conform to all electrical and physical parameters of MIL-PRF-21038/27 and provide performance as required over -55° to +125°. Built and tested in ISO 9002 approved facilities. Flat pack surface mount package.

- dual ratio, single interface
- for use in MIL-STD-1553 applications
- performance to MIL-PRF-21038/27 requirements
- built in ISO 9002 facility
- -55° to +125° C operating temperatures



APPLICABLE SPECIFICATIONS

- MIL-STD-1553B
- MIL-STD-202
- MIL-I-45208
- MIL-T-10727
- MIL-PRF-21038
- ISO 9002

SUMMARY PERFORMANCE SPECIFICATIONS

Impedance.....	see table, next page
Droop.....	≤ 20%
Overshoot.....	± 1V max
Common mode rejection (CMR).....	≥ 45 dB
Frequency range (no load).....	75 kHz to 1MHz
Operating temperature range.....	-55° to +125°C
Weight.....	≤ 5 grams
Insulation resistance (min).....	10K megohms @ 250 Vdc
Dielectric withstanding voltage.....	100 Vrms




CHARACTERISTICS


PART NO.	TERMINALS	RATIO ($\pm 3\%$)	RDC (ohms) MAX	IMPEDANCE (ohms) MIN
H1553-1	1-3:4-8 1-3:5-7	1CT:1CT 1CT:.707CT	1-3 3.0 4-8 3.0	(1-3) 4000
H1553-2	1-3:4-8 1-3:5-7	1.4CT:1CT 2CT:1CT	1-3 3.5 4-8 3.0	(1-3) 7,200
H1553-3	1-3:4-8 1-3:5-7	1.25CT:1CT 1.66CT:1CT	1-3 3.2 4-8 3.0	(1-3) 4000
H1553-5*	1-3:4-8 1-3:5-7	1CT:2.12CT 1CT:1.5CT	1-3 1.0 4-8 3.5	(4-8) 4,000
H1553-45*	1-3:4-8 1-3:5-7	1CT:2.50CT 1CT:1.79CT	1-3 1.0 4-8 3.5	(4-8) 4,000

- hermetically sealed
- single interface
- dual ratio
- surface-mount flat pack

*Designed for transceivers utilizing a single supply voltage (+5V).



Note: Case and cover are nickel plated Kovar. Leads are nickel-plated Kovar. Other lead finishes available.

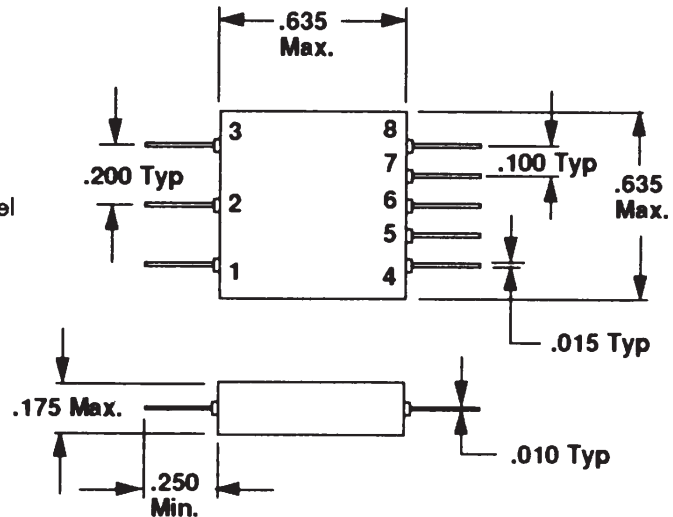

Notes:

1. All dimensions are in inches.
2. Tolerances: .xx = +.008
3. All specifications and dimensions are subject to change without notice.




Value Series (COTS) through the board MIL-PRF-21038 Interface Transformers

These non-QPL interface transformers are built and tested in ISO 9002 approved facilities. They conform to all electrical and physical parameters of MIL-PRF-21038/27. Choose one of three operating temperature ranges including 0° to +70° C, -40° to +85° C, or -55° to +125° C.

- dual ratio, single interface (see schematic)
- through the board package
- for use in MIL-STD-1553 applications
- standard height, 0.250 in.
- performance to MIL-PRF-21038/27 requirements
- built in ISO 9002 facility



The transformer package shown on this page is also available fully qualified to MIL-PRF-21038/27 requirements.



APPLICABLE SPECIFICATIONS

- MIL-STD-1553B
- MIL-STD-202
- MIL-T-10727
- MIL-PRF-21038
- ISO 9002

operating temp.	prefix
0° to 70°C	C
-40° to +85°C	N
-55° to +125°C	TQ

SUMMARY PERFORMANCE SPECIFICATIONS

Impedance.....	see table, next page
Droop.....	≤ 20%
Overshoot.....	± 1V max
Common mode rejection (CMR).....	≥ 45 dB
Frequency range (no load).....	75 kHz to 1MHz
Operating temperature range.....	see table, next page
Weight.....	≤ 5 grams
Insulation resistance (min).....	10K megohms @ 250 Vdc
Dielectric withstanding voltage.....	100 Vrms



CHARACTERISTICS

PART NO.	TERMINALS	RATIO ($\pm 3\%$)	RDC (ohms) MAX.	IMPEDANCE (ohms) MIN.
(X)1553-1 ¹	1-3:4-8 1-3:5-7	1CT:1CT 1CT:.707CT	1-3 = 3.0 4-8 = 3.0	(1-3) 4,000
(X)1553-2	1-3:4-8 1-3:5-7	1.4CT:1CT 2CT:1CT	1-3 = 3.5 4-8 = 3.0	(1-3) 7,200
(X)1553-3 ²	1-3:4-8 1-3:5-7	1.25CT:1CT 1.66CT:1CT	1-3 = 3.2 4-8 = 3.0	(1-3) 4,000
(X)1553-5 ²	1-3:4-8 1-3:5-7	1CT:2.12CT 1CT:1.5CT	1-3 = 1.0 4-8 = 3.5	(4-8) 4,000
(X)1553-45 ²	1-3:4-8 1-3:5-7	1CT:2.5CT 1CT:1.79CT	1-3 = 1.0 4-8 = 3.5	(4-8) 4,000


- standard profile
- dual ratio
- through the board

- ¹ Refer to prefix table (right) to select temperature range.
- ² Designed for transceivers utilizing a single supply voltage (+5V).

operating temp.	prefix
0° to 70°C	C
-40° to +85°C	N
-55° to +125°C	TQ



- Notes:**
- All dimensions are in inches.
 - Tolerances: .xx = +.008
 - All specifications and dimensions are subject to change without notice.

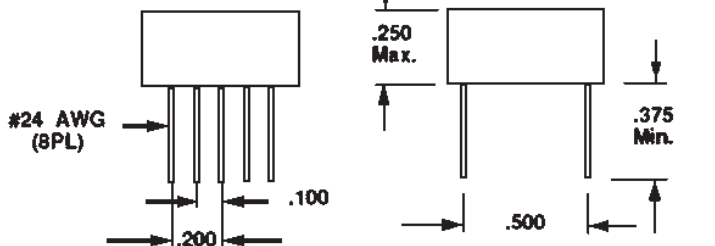



WARRANTY

Pulse Specialty Components warrants for a period of 90 days from the date of shipment, that under normal use and service, its products will be free from defects in workmanship and material. Pulse Specialty Components' sole responsibility under this warranty is, at its option, to repair or replace, without charge, any defective product or part, or to credit buyer for the purchase price of such defective product, provided:

- 1) Buyer promptly notifies Pulse Specialty Components in writing within the warranty period, and
- 2) The defective product or part is returned to Pulse Specialty Components with transportation charges prepaid by Buyer, and
- 3) Pulse Specialty Components examination of such product shall disclose to its satisfaction that said defect exists and has not been caused by misuse, neglect, improper installation, repair or alteration, or accident.

EXCEPT FOR THE ABOVE WARRANTY AND THE IMPLIED WARRANTY OF TITLE, PULSE SPECIALTY COMPONENTS MAKES NO OTHER WARRANTIES, EXPRESS OR IMPLIED, INCLUDING ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR ANY PARTICULAR PURPOSE. NO LIABILITY IS ASSUMED FOR EXPENDABLE ITEMS SUCH AS LAMPS AND FUSES. PULSE SPECIALTY COMPONENTS WILL NOT BE LIABLE FOR INCIDENTAL OR CONSEQUENTIAL DAMAGES UNDER ANY CIRCUMSTANCES.



**SPECIALTY
COMPONENTS**

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [pulse manufacturer](#):

Other Similar products are found below :

[5994](#) [5993](#) [PL1746](#) [20379](#) [PL1445T](#) [PH9085.011NL](#) [P2004NLT](#) [PE-0603CD060KTT](#) [P0182T](#) [PE-0805CD030KTT](#) [PE-53363NLT](#)
[23Z106SM-T](#) [HX5400NL](#) [JXD0-4005NL](#) [ST6200QNL](#) [T3001NL](#) [HX2019](#) [HX1148NL](#) [PE-65968NL](#) [PE-65535NL](#) [T1142NLT](#) [H6062NL](#)
[H7019FNL](#) [PA2743NL](#) [P0438T](#) [P0584](#) [P0752.474T](#) [P1167.154T](#) [STQN1553-45](#) [JG0-0098NL](#) [JG0-0025NL](#) [J20-0014NL](#) [W1911](#) [JX20-](#)
[0114NL](#) [HFB075100A](#) [HX6101NL](#) [RO2408NMD](#) [P0469NL](#) [P0841SNLT](#) [PB2134NL](#) [ST2-12B42](#) [PE-0805CM331JTT](#) [53119](#)
[J3026G01DNL](#) [100B-1001XNL](#) [P0849SNL](#) [W3012-K](#) [T1124NL](#) [H5004NL](#) [JX30-0005NL](#)