

TECHNICAL DATA SHEET Description: 13.56MHz RFID/NFC SMD Antenna

Series: Embedded NFC

PART NUMBER: W3102

## **Features:**

- Antenna type coil on ferrite core
- Frequency 13.56MHz
- Inductance 4.7uH
- Read Distance 17mm
- Size 7.8 x 7 x 5 mm
- Fully SMD compatible
- RoHS Compliant
- MSL level 3

## **Applications:**

- RFID / NFC systems
- · Pairing, Sharing

All dimensions are in mm / inches

#### Issue: 1851

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION

This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden.

For more information: Pulse Worldwide Headquarters 15255 Innovation Drive #100 San Diego, CA 92128 USA Tel:1-858-674-8100

Pulse/Larsen Antennas 18110 SE 34<sup>th</sup> St Bldg 2 Suite 250 Vancouver, WA 98683 USA Tel: 1-360-944-7551 Europe Headquarters Pulse GmbH & Do, KG Zeppelinstrasse 15 Herrenberg, Germany Tel: 49 7032 7806 0 Pulse (Suzhou) Wireless Products Co, Inc. 99 Huo Ju Road(#29 Bldg,4<sup>th</sup> Phase Suzhou New District Jiangsu Province, Suzhou 215009 PR China Tel: 86 512 6807 9998







**Description**: 13.56MHz RFID/NFC SMD Antenna

Series: Embedded NFC

PART NUMBER: W3102

### **ELECTRICAL SPECIFICATIONS**

Antenna Type	coil
Frequency	13.56 MHz
Nominal Impedance	50 Ω/80Ω
Self inductance	4.7uH
resistance	0.25Ω
read distance	17mm

MECHANICAL SPECIFICATIONS

Size Weight Antenna Material 7.8 X 7.0 X 5.0 mm 0.83 g Core: 7.8 X 5.0(SH)DR B3.0 DR7.8 X 5.0 B3.0 Wire: 2UEW

ENVIRONMENTAL SPECIFICATIONS				
Operating Temperature	-40 ~ +125° C			
Storage Temperature	-20 ~ +80° C			
RoHS Compliant	Yes			

Issue: 1851

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION



2





**Description**: 13.56MHz RFID/NFC SMD Antenna


Series: Embedded NFC


PART NUMBER: W3102

## **MECHANICAL DRAWING**









Recommend Solder Dimension

Dimension	А	ВС		D	Е	F	G
Unit (mm/in)	7.0±0.3/0.28±0.01	7.8±0.3/0.31±0.01	5.0±0.35/0.20±0.01	2.5/0.10 Ref	2.7/0.11 Ref	2.5/0.10 Ref	7.5/0.30 Ref

Issue: 1851

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION




3



TECHNICAL DATA SHEET Description: 13.56MHz RFID/NFC SMD Antenna PART NUMBER: W3102

Series: Embedded NFC

Reflow Soldering Temperature Profile Recommendation

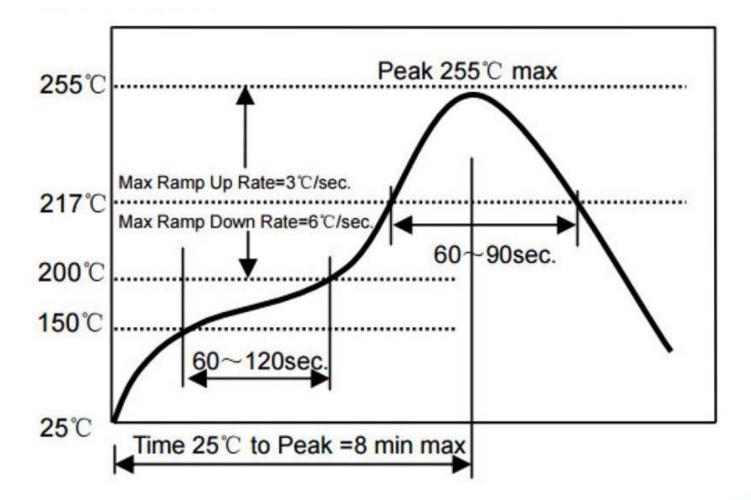

#### Issue: 1851

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION





TECHNICAL DATA SHEET Description: 13.56MHz RFID/NFC SMD Antenna


Series: Embedded NFC

PART NUMBER: W3102

## **TEST SETUP**



# ACR card reader

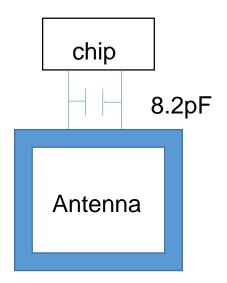

# Matching circuit

#### Issue: 1851

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION



5




**Description**: 13.56MHz RFID/NFC SMD Antenna

Series: Embedded NFC


PART NUMBER: W3102

## PACKAGING

1. Tape and reel packing with plastic vacuum bag. 1000 PCS/ REEL, 3 Reels/ Small BOX, 3 Small Boxes/ Big Box

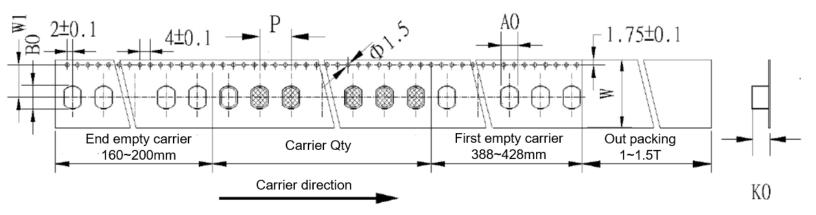

Tupo	Carrier Size						
Туре 🛛 🕅	W	W1	Т	Р	AO	BO	KO
W3102	16	12.5	0.4	12	7.5	6. <mark>1</mark>	9.5

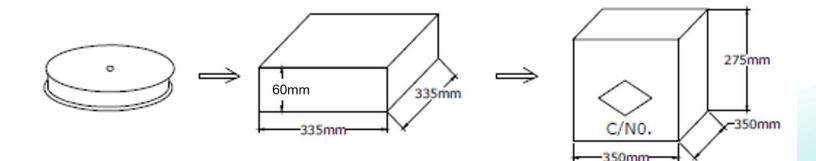

#### Issue: 1851

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION

6



**Description**: 13.56MHz RFID/NFC SMD Antenna

Series: Embedded NFC

PART NUMBER: W3102

2. MSL: Level 3

2.1 Calculated shelf life in sealed bag: 12 months at <  $30^{\circ}$ C and  $60^{\circ}$  relative humidity (RH)

2.2 Peak temperature in reflow: 255 °C Max

2.3 After bag is opened, devices that will be subjected to reflow solder or other temperature process must:

a) Mount within: 168 hours of factory conditions  $\leq$  30 °C/60%


b) stored at < 20% RH

2.4 Devices require bake, before mounting, if:

a) Humidity Indicator Card is > 20% when read at 23  $\pm$  5 °C

b) 3a or 3b not met

2.5 If baking is required, devices may be baked for 24 hours at 125~130 °C





# **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Antennas category:

Click to view products by Pulse manufacturer:

Other Similar products are found below :

 CCT
 FM1
 ABFT
 AD-NM-SMAF
 001-0021
 CTC110
 MAF94149
 EXE902SF
 MMCX-SMA-100
 PDQ24496-91NF
 GAN30084EU
 930 

 033-R
 A08-HABUF-P51
 AAF95035
 DG-ANT-20DP-BG-B
 ANT-DB1-RMT-SMA
 APAMPGJ-141
 1513563-1
 OF86315-FNF
 OP24516DS 

 91NM
 A09-HASM-7
 EXE902MD
 EXE902SM
 SPDA17806/2170LAR
 APAMPG-117
 GPS1575SP26-004
 GPS15MGSMA
 CMD69273P 

 30NF
 CMQ69273-30NF
 RD2458-5-OTDR-NM
 RD2458-5-RSMA
 TRAB24/49003
 TRAB8903NP
 TRAB9023NP
 TRAB9023P

 W4120ER5000
 W6102B0100
 YE572113-30RSMM
 108-00014-50
 SPDA17RP918
 OP24516SX-91NM
 OP24516SX-91RSMM

 CMQ69273P-30NF
 CMS69273P-30NF
 TRAB24/003N
 TRAB24003NP
 TRAB8903 A09-Y8NF