Pulse Part Number GPSDM700/2500 Family





Pulse is proud to introduce a new state-of-the-art direct mount multi band antenna. This body mount antenna operates from 698 thru 2700 MHz, including LTE. The antenna is ideal for voice, mobile data, Public Safety, WLAN and asset tracking applications. The rugged, yet aesthetically pleasing design provides UV and IP-65 protection to ensure a long, reliable, maintenance-free life.

The antenna mount can accommodate up to a 5/8" (16 mm) thick surface. Antennas equipped with GPS have 3 cables to optimally support the different technologies. Wireless voice, data and LTE frequencies are supported by a single low-loss RG-58 cable. WLAN operates on a separate RG-58 cable. The 26 dB gain GPS antenna has its own RG-174 cable. Additional cable configurations, lengths and connector options are available upon request.

Features

- Single antenna supports multiple applications/ technologies- Eliminates "antenna farm" vehicle appearance
- Separate cables create maximum application flexibility
- Easily mounted through a single 3/4" hole
- RoHS Compliant Product

Applications

- Mobile and Fixed Broadband
- Navigation/Asset Tracking/Fleet Management
- LTE and 700 MHz Public Safety

P/N	Frequency	Cable Type	Cable Length (feet / meters)	Connectors
	698-960/1710-2170/2300-2700	RG-58	17 / 5.18	FME Female
GPSDM700/2500FFS	2400-2485	RG-58	17 / 5.18	FME Female
	1575.42	RG-174	17 / 5.18	SMA Male

Pulse Part Number GPSDM700/2500 Family

Electrical Specifications

Frequency [MHz]	Cable 1	698-960/1710-2170/ 2300-2700
	Cable 2	2400-2485
	Cable 3	1575.42
	Nominal Impedance $[\Omega]$	50
VSWR	698-960/1710-2170/ 2300-2700	2.0:1
	2400-2485	2.0:1
	1575.42	2.0:1
Gain [dBi]	698-960/1710-2170/ 2300-2700	3
	2400-2485	6
Polarization	698-960/1710-2170/ 2300-2700	Linear Vertical
	2400-2485	Linear Vertical
	1575.42	RHCP
Power Rating [W]		10

LNA Specifications

Gain [5 V]	5 dBic/30 dB ± 2 dB
Gain [3 V]	5 dBic/25 dB ± 2 dB
Noise Figure	1.3 dB
Current Draw [Ma]	12 mA @ 3.3 V
Voltage [VDC]	3 - 5

Environmental Specifications

Operating Temperature [°C]	-40 / +85
Storage Temperature [°C]	-40 / +85
Relative Humidity [%]	100%

Mechanical Specifications


Radome Material	UV Stable
Color	Black
Ingress Protection	IP 65
Weight [ozs/g]	15 / 470
Dimensions [in/mm]	3.5 H x Ø4.16 / 88.3 x Ø105.7
Mounting	3/4" hole




Pulse Part Number GPSDM700/2500 Family

Radiation Patterns

Vertical Plane 700 MHz

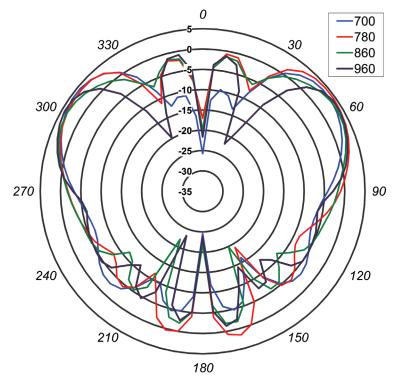

Vertical Plane 1750 MHz

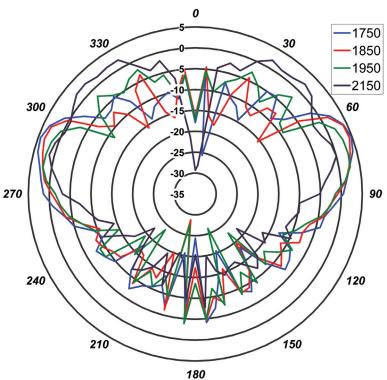





Pulse Part Number GPSDM700/2500 Family

Radiation Patterns



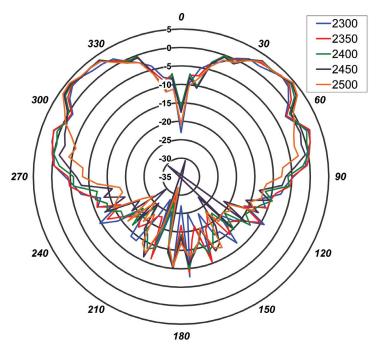

Vertical Plane 2400 MHz

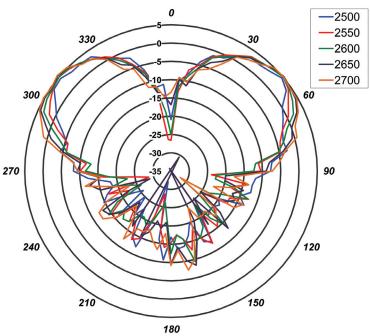

For More Information

Asia Headquarters B402, Shenzhen Academy of **Pulse Worldwide Headquarters** Larsen Brand Antennas Europe Headquarters Pulse North Asia Pulse (Suzhou) Wireless Products Co, Inc. 12220 World Trade Drive 3611 NF 112th Avenue Pulse GmbH & Do, KG 3F, No. 198, Zhongyuan Road 99 Huo Ju Road, (#29 Bldg, 4th Phase) Suzhou New District San Diego, CA 92128 Vancouver, WA 98682 Zeppelinstrasse 15 Aerospace Technology Bldg. Zhongli City, Taoyuan County 320 Herrenberg 10th Kejinan Road, High-Tech Zone Taiwan R. O. C. Science & Tech Industrial Park Germany Nanshan District, Shenzen, PR China 518057 Jiangsu Province, Suzhou 215009 PR China Tel: 360 944 7551 Tel: 49 7032 7806 0 Tel: 86 512 6807 9998 Tel: 858 674 8100 Tel: 86 755 33966678 Tel: 886 3 4356768 Fax: 858 674 8262 Fax: 369 944 7556 Fax: 49 7032 7806 135 Fax: 86 755 33966700 Fax: 886 3 4356823 Fax: 86 512 6809 8023

Performance warranty of products offered on this data sheet is limited to the parameters specified. Data is subject to change without notice. Other brand and product names mentioned herein may be trademarks or registered trademarks of their respective owners. © Copyright, 2010. Pulse Electronics, Inc. All rights reserved.



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Antennas category:

Click to view products by PulseLarsen manufacturer:

Other Similar products are found below:

GAN30084EU 930-033-R GW17.07.0250E 1513563-1 EXE902SM APAMPG-117 MAF94383 W3908B0100 W6102B0100 YE572113-30RSMM 108-00014-50 66089-2406 SPDA17RP918 A09-F8NF-M A09-F5NF-M RGFRA1903041A1T W3593B0100 W3921B0100 SIMNA-868 SIMNA-915 SIMNA-433 W1044 W1049B090 A75-001 WTL2449CQ1-FRSMM CPL9C EXB148BN 0600-00060 TRA9020S3PBN-001 Y4503 GD5W-28P-NF MA9-7N GD53-25 GD5W-21P-NF C37 MAF94051 MA9-5N EXD420PL B1322NR QWFTB120 MAF94271 MAF94300 GPSMB301 FG4403 AO-AGSM-OM54 5200232 MIKROE-2349 WCM.01.0111 MIKROE-2393 MIKROE-2352