

Description: RO, 10 dBi, 5.725-5.925 GHz, NF

PART NUMBER: RO5810NF

Series: Radome Omni



Features:

- Omnidirectional radiation pattern in H-plane
- 10/9 dBi Gain
- Stable gain and pattern across the operating band
- IP67
- N-Female connector

Applications:

- 5 GHz ISM band
- DSRC
- WiFi 5.x GHz
- Indoor/Outdoor use

Issue: 1632

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION

This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden. For more information:

Pulse Worldwide Headquarters 12220 World Trade Drive San Diego, CA 92128 USA Tel:1-858-674-8100 Pulse/Larsen Antennas 18110 SE 34th St Bldg 2 Suite 250 Vancouver, WA 98683 USA Tel: 1-360-944-7551 Europe Headquarters Pulse GmbH & Do, KG Zeppelinstrasse 15 Herrenberg, Germany Tel: 49 7032 7806 0 Pulse (Suzhou) Wireless Products Co, Inc. 99 Huo Ju Road(#29 Bldg,4th Phase Suzhou New District Jiangsu Province, Suzhou 215009 PR China Tel: 86 512 6807 9998



Description: RO, 10 dBi, 5.725-5.925 GHz, NF

Series: Radome Omni

PART NUMBER: RO5810NF

ELECTRICAL SPECIFICATIONS

Antenna Type Collinear dipole array

Frequency 5.725-5.925 GHz

Nominal Impedance 50 Ω

VSWR 2:1

Radiation Pattern Omni

HPBW / Vertical Plane $8.5 \circ \pm 0.5 \circ$

Gain (5.725-5.875 GHz) 10 dBi +/- 1 dB

Gain (5.875-5.925 GHz) 9 dBi +/- 1 dB

Efficiency 70 %

Polarization Vertical

Power Withstanding 20 W

E.S.D. Protection DC Grounded

MECHANICAL SPECIFICATIONS

Overall Length 434 mm

Weight 167.3 g

Antenna Color / Material White / Pultruded Fiberglass, UV-Protected

Connector type N-Female

ENVIRONMENTAL SPECIFICATIONS

Operating Temperature -30° to +60° C

Ingress Protection IP67

Wind-loading 241.4 km/h

RoHS Compliant Yes




Description: RO, 10 dBi, 5.725-5.925 GHz, NF

PART NUMBER: RO5810NF

Series: Radome Omni

MECHANICAL DRAWING

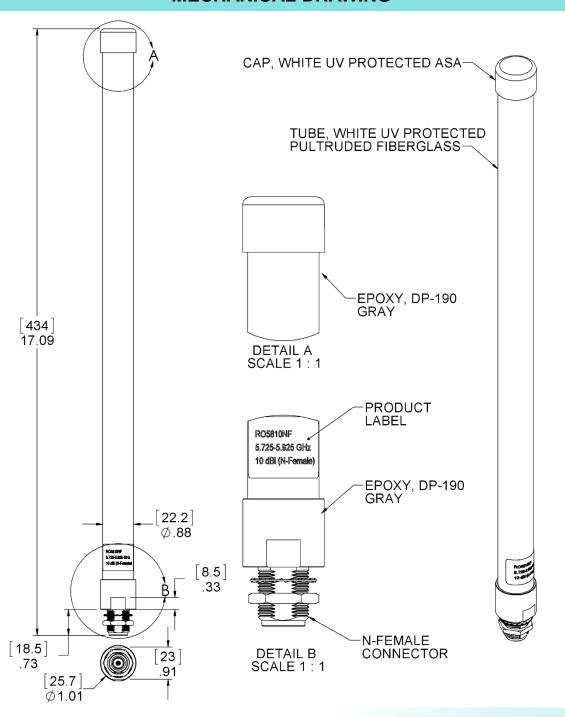

All dimensions are in mm / inches



Description: RO, 10 dBi, 5.725-5.925 GHz, NF


PART NUMBER: RO5810NF

Series: Radome Omni

CHARTS

VSWR vs Frequency RO5810NF

Measured at Pulse, USA - Aug 16, 2016

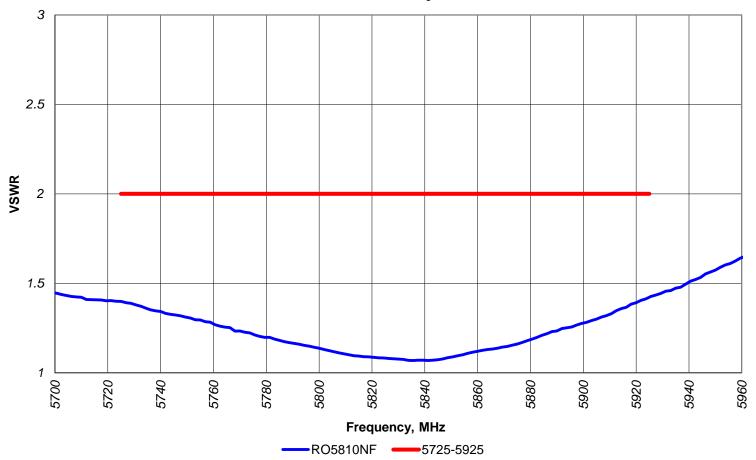



Description: RO, 10 dBi, 5.725-5.925 GHz, NF


PART NUMBER: RO5810NF

Series: Radome Omni

CHARTS

Peak Gain vs Frequency RO5810NF

Measured at Pulse, USA - Aug. 16, 2016

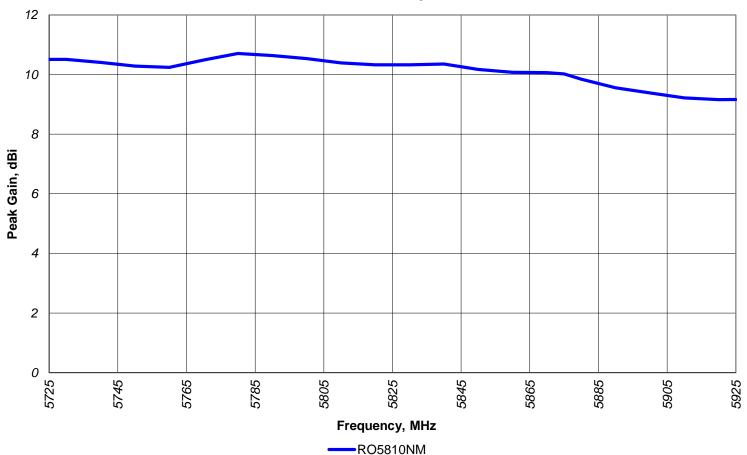



Description: RO, 10 dBi, 5.725-5.925 GHz, NF


PART NUMBER: RO5810NF

Series: Radome Omni

CHARTS

Efficiency vs Frequency RO5810NF

Measured at Pulse, USA - Aug. 16, 2016

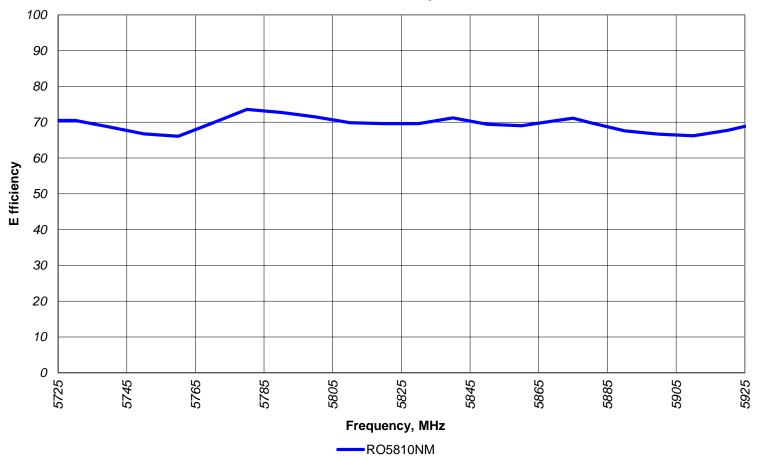






Series: Radome Omni

Description: RO, 10 dBi, 5.725-5.925 GHz, NF

PART NUMBER: RO5810NF

CHARTS

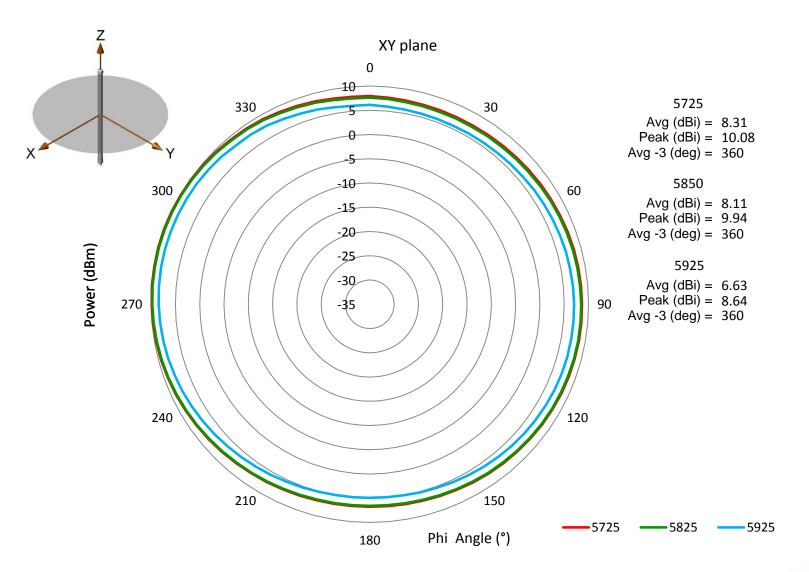






Series: Radome Omni

Description: RO, 10 dBi, 5.725-5.925 GHz, NF

PART NUMBER: RO5810NF

CHARTS

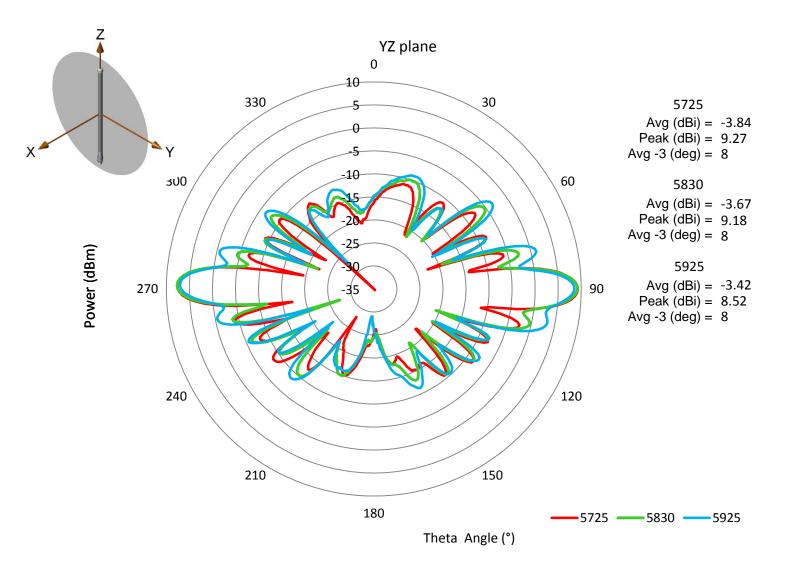



Description: RO, 10 dBi, 5.725-5.925 GHz, NF

PART NUMBER: RO5810NF

Series: Radome Omni

PACKAGING

Packaged one product per Poly-bag with product label attached to outside of bag.

ASSEMBLY



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Antennas category:

Click to view products by PulseLarsen manufacturer:

Other Similar products are found below:

GAN30084EU 930-033-R GW17.07.0250E 1513563-1 EXE902SM APAMPG-117 MAF94383 W3908B0100 W6102B0100 YE572113-30RSMM 108-00014-50 66089-2406 SPDA17RP918 A09-F8NF-M A09-F5NF-M RGFRA1903041A1T W3593B0100 W3921B0100 SIMNA-868 SIMNA-915 SIMNA-433 W1044 W1049B090 A75-001 WTL2449CQ1-FRSMM CPL9C EXB148BN 0600-00060 TRA9020S3PBN-001 Y4503 GD5W-28P-NF MA9-7N GD53-25 GD5W-21P-NF C37 MAF94051 MA9-5N EXD420PL B1322NR QWFTB120 MAF94271 MAF94300 GPSMB301 FG4403 AO-AGSM-OM54 5200232 MIKROE-2349 WCM.01.0111 MIKROE-2393 MIKROE-2352