

### **TECHNICAL DATA SHEET**

# **Description**:

Multiband Swivel Dipole 617-3900MHz

**PART NUMBER: SPDA24617/3900** 



### Features:

- 617-960 MHz
- 1400-2700 MHz
- 3200-3900 MHz
- Omni pattern in H-plane
- Gain 1 / 2.5 / 3 dBi
- Power rating 5W
- IP65
  RoHS Compliant



## **Applications:**

- LTE Routers / Gateways
- , 4G / 5G LTE
  - 617-960/1400-2170/2300-2700/3200-3900MHz
  - Includes New Band 71 (617-698 MHz) and CBRS Bands
    42 and 48 (3.4-3.7 GHz)

All dimensions are in mm / inches

Issue: 1850

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION

This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden. For more information:

Pulse Worldwide Headquarters 15255 Innovation Drive #100 San Diego, CA 92128 USA Tel:1-858-674-8100 Pulse/Larsen Antennas 18110 SE 34<sup>th</sup> St Bldg 2 Suite 250 Vancouver, WA 98683 USA Tel: 1-360-944-7551 Europe Headquarters Pulse GmbH & Do, KG Zeppelinstrasse 15 Herrenberg, Germany Tel: 49 7032 7806 0 Pulse (Suzhou) Wireless Products Co, Inc. 99 Huo Ju Road(#29 Bldg,4<sup>th</sup> Phase Suzhou New District Jiangsu Province, Suzhou 215009 PR China Tel: 86 512 6807 9998



Polarization

### TECHNICAL DATA SHEET

Linear-Vertical

# **Description**:

Multiband Swivel Dipole 617-3900MHz

**PART NUMBER: SPDA24617/3900** 

### **ELECTRICAL SPECIFICATIONS**

Frequency 617-960/1400-2700/3200-3900 MHz

Nominal Impedance 50  $\Omega$ 

VSWR 3:1(Max)

Radiation Pattern Omni

Peaking Gain (typical) 1dBi @617-960MHz

Peaking Gain (typical) 2.5 dBi @1400-2700MHz

Peaking Gain (typical) 3 dBi @ 3200-3900MHz

Efficiency (typical) 45% @617-960MHz

Efficiency (typical) 70% @1400-2700MHz

Efficiency (typical) 70% @ 3200-3900MHz

Power Withstanding 5W

### **MECHANICAL SPECIFICATIONS**

Plastic radome ABS/PC

Color Black

Connector Type SMA-M

Flammability UL94-V0

Ingress Protection IP65

Weight 56.8 g

Overall Length 228.84[9.01] mm [INCHES]

Position 0°. 45° & 90°

Issue: 1850



### TECHNICAL DATA SHEET

# **Description**:

Multiband Swivel Dipole 617-3900MHz

**PART NUMBER: SPDA24617/3900** 

### **ENVIRONMENTAL SPECIFICATIONS**

Operating temperature range -40/+85 ° C

Non-operating temperature range -40/+85 ° C

Temperature Shock 3 CYCLES, -25°C TO +70°C AT 5° PER MIN

Humidity

Cyclic Mil-Std-810 Method 507.3, Procedure III 5 cycles @ 95% RH

Vibration

Random 5-500 Hz FREQ, MIL STD 810 G section 514.4

Mechanical Shocks 4.78 m/s

Drop test 1 meter, 10 times to tile

RoHS Compliant Yes






**Description**:

Multiband Swivel Dipole 617-3900MHz

**PART NUMBER: SPDA24617/3900** 

### Series: Omni Antenna

### **MECHANICAL DRAWING**

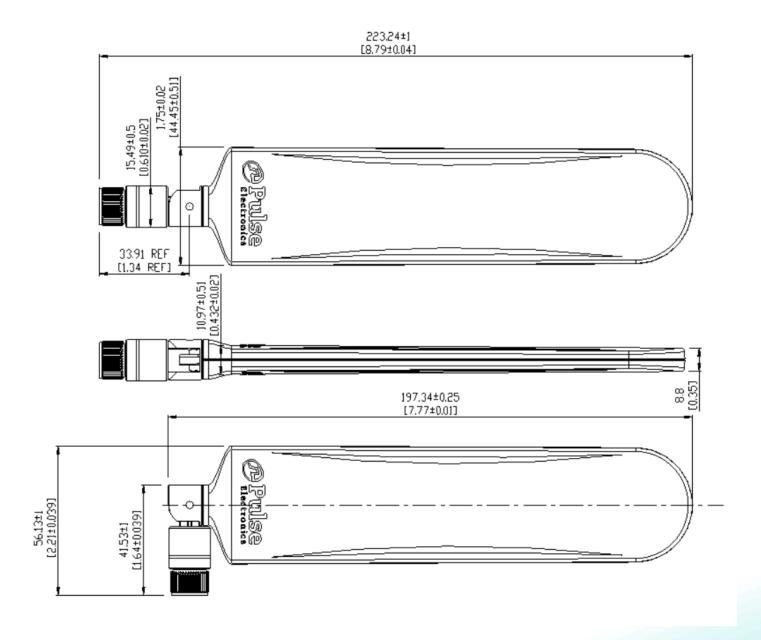





### **TECHNICAL DATA SHEET**

# **Description:**

Multiband Swivel Dipole 617-3900MHz

**PART NUMBER: SPDA24617/3900** 

### **TEST SETUP**

Setup1: straight



Setup2: bending-90°



Note: All is test in free space. And the Radiation Pattern 2D is only test in setup1-straight.





# **Description**:

Multiband Swivel Dipole 617-3900MHz


**PART NUMBER: SPDA24617/3900** 

# Series: Omni Antenna

### **CHARTS**

# Voltage Standing-Wave Ratio

### SPDA24617-3900

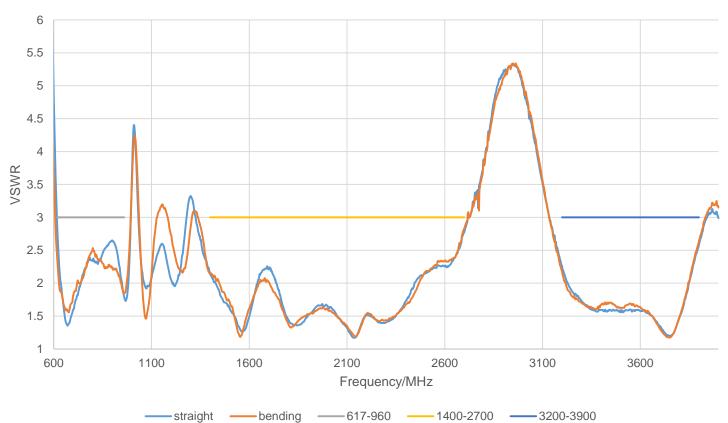







# **Description**:

Multiband Swivel Dipole 617-3900MHz

**PART NUMBER: SPDA24617/3900** 

# Series: Omni Antenna

### **CHARTS**

# **Peaking Gain**



# Radiation Efficiency

### 90.00% 80.00% Efficiency/% 70.00% 60.00% 50.00% 40.00% 30.00% 500 1000 1500 2000 2500 3000 3500 4000 Axis Title

SPDA24617/3900

Issue: 1850



Straight



# **Description**:


Multiband Swivel Dipole 617-3900MHz


**PART NUMBER: SPDA24617/3900** 


# Series: Omni Antenna

### **CHARTS**

# Radiation Pattern 2D(617-960MHz)

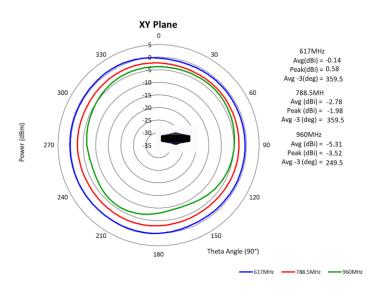

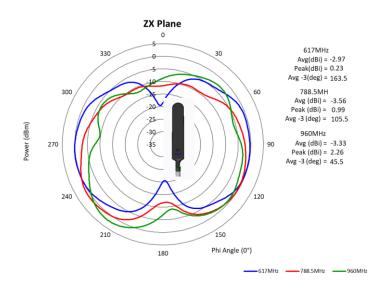

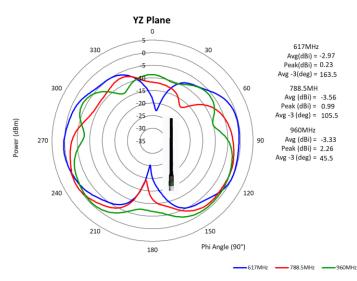

Issue: 1850



### TECHNICAL DATA SHEET


# **Description**:


Multiband Swivel Dipole 617-3900MHz


**PART NUMBER: SPDA24617/3900** 

### **CHARTS**

# Radiation Pattern 2D(1400-2700MHz)

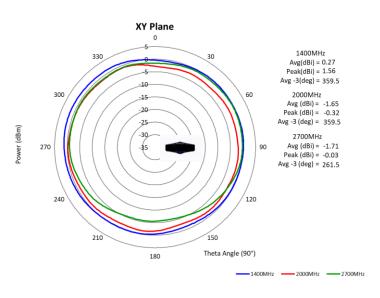

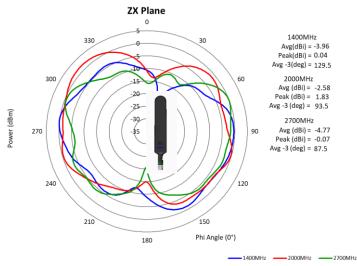

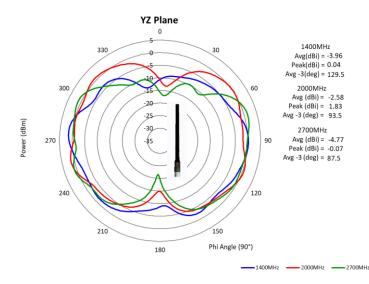

Issue: 1850

ROHS



### TECHNICAL DATA SHEET


# **Description**:


Multiband Swivel Dipole 617-3900MHz


**PART NUMBER: SPDA24617/3900** 

### **CHARTS**

# Radiation Pattern 2D(3200-3900MHz)

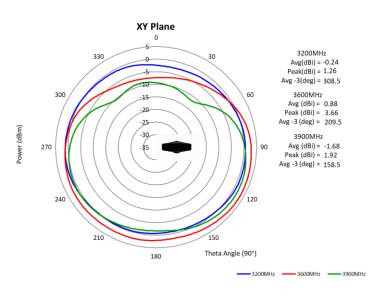

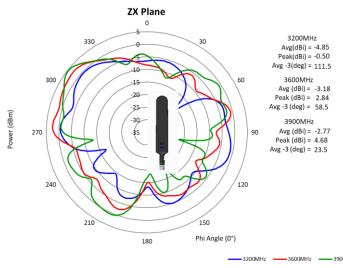

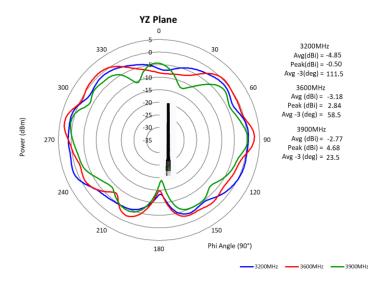

Issue: 1850



### **TECHNICAL DATA SHEET**

# **Description**:

Multiband Swivel Dipole 617-3900MHz

**PART NUMBER: SPDA24617/3900** 

### **PACKAGING**

1 PCS/PE bag 100 PCS/Carton box



# **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Antennas category:

Click to view products by PulseLarsen manufacturer:

Other Similar products are found below:

GAN30084EU 930-033-R GW17.07.0250E 1513563-1 EXE902SM APAMPG-117 MAF94383 W3908B0100 W6102B0100 YE572113-30RSMM 108-00014-50 66089-2406 SPDA17RP918 A09-F8NF-M A09-F5NF-M RGFRA1903041A1T W3593B0100 W3921B0100 SIMNA-868 SIMNA-915 SIMNA-433 W1044 W1049B090 A75-001 WTL2449CQ1-FRSMM CPL9C EXB148BN 0600-00060 TRA9020S3PBN-001 GD5W-28P-NF MA9-7N GD53-25 GD5W-21P-NF C37 MAF94051 MA9-5N EXD420PL B1322NR QWFTB120 MAF94271 MAF94300 GPSMB301 FG4403 AO-AGSM-OM54 5200232 MIKROE-2349 WCM.01.0111 MIKROE-2393 MIKROE-2352 MIKROE-2350