10 x 3.2 x 4.0 mm Ceramic Chip Antenna (On Ground type, Top surface ground removal area 10.80 x 6.25 mm). Pulse Part Number: W3001



Features

- Omni directional radiation (Azimuthal plane)
- Low profile
- Compact size W x L x H (10 x 3.2 x 4 mm)
- Low weight (600 mg)
- Lead free materials
- Fully SMD compatible
- Lead free soldering compatible
- Tape and reel packing
- RoHS compliant product

Applications

- Bluetooth
- 2.4 GHz WLAN
- 2.4 GHz ISM Band System

Electrical specifications @ +25 °C

Note: Electrical characteristics depend on test board (GP) size and antenna positioning on GP and Ground Clearance area size.

WiFi 2.4 GHz

Typical performance

(Test board size 80 x 37 mm, PWB top surface ground removal area 10.80 x 6.25 mm, position 1 on PWB)

Frequency Range	Max Gain	Efficiency	Return loss	Impedance	Operating
[MHz]	[dBi]	[%] / [dB]	min. [dB]	[Ω]	Temperature [° C]
2400 – 2483.5	1.5 (Peak) 0.5 (Band edges)	75 /-1.25 (Peak) 60/-2.25 (Band edges)	-6	50	-45 to +85

Takatie 6



10 x 3.2 x 4.0 mm Ceramic Chip Antenna (On Ground type, Top surface ground removal area 10.80 x 6.25 mm). Pulse Part Number: W3001

Terminal Configuration and Dimensions

On Ground type, Top surface ground removal area 10.80 x 6.25 mm

Antenna features

No.	Terminal name	Terminal Dimensions
1	Feed / GND	1.5 x 2.75 mm
2	Feed / GND	1.5 x 2.75 mm


Antenna is symmetrical.

Either of terminals 1 or 2 can be feed / GND

Antenna PWB Layout Specifications

On Ground type, Top surface ground removal area $10.80 \times 6.25 \text{ mm}$


Matching and tuning component values depend on application and surrounding mechanics / materials. Feed line should be designed to match 50 Ω characteristic impedance, depending on PWB material and thickness. Recommended test board layout for electrical characteristic measurement, test board outline size 80 x 37 mm.

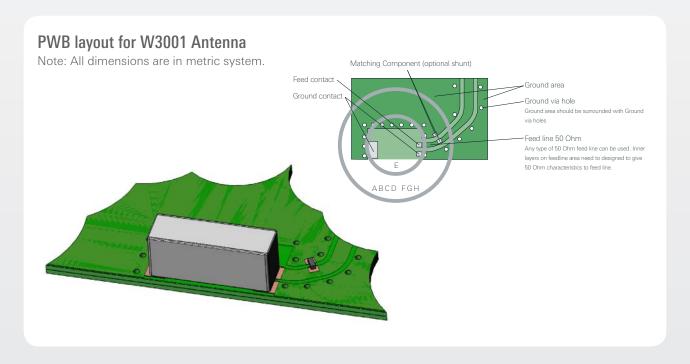

Takatie 6



 $10 \times 3.2 \times 4.0$ mm Ceramic Chip Antenna (On Ground type, Top surface ground removal area 10.80×6.25 mm). Pulse Part Number: W3001

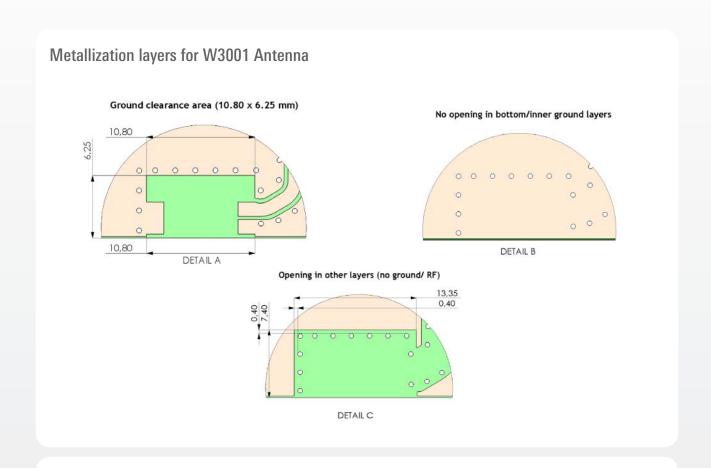

Pad dimensions in top copper Pad dimensions in top copper O,20 O,20 Antenna position on PWB layout Antenna pads DETAIL E are marked blue


Takatie 6 90440 Kempele, Finland Tel: +358 207 935 500 Fax: +358 207 935 501

www.pulseeng.com/antennas




10 x 3.2 x 4.0 mm Ceramic Chip Antenna (On Ground type, Top surface ground removal area 10.80 x 6.25 mm). Pulse Part Number: W3001

Typical ground via hole placement in PWB layout for W3001 Antenna

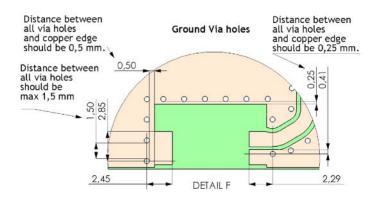

Solder resist opening and Paste stencil recommendation for W3001 Antenna

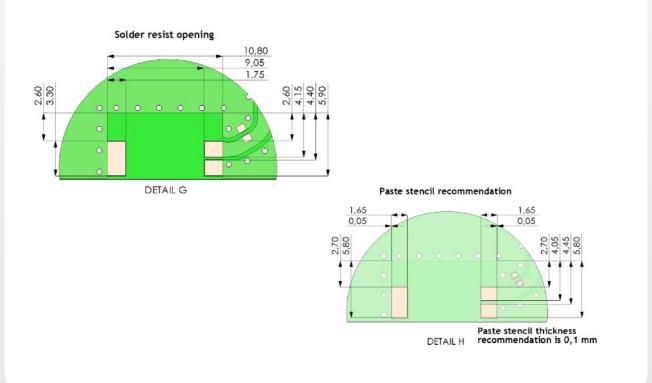

Takatie 6 90440 Kempele, Finland Tel: +358 207 935 500 Fax: +358 207 935 501


www.pulseeng.com/antennas





 $10 \times 3.2 \times 4.0 \text{ mm}$ Ceramic Chip Antenna (On Ground type, Top surface ground removal area $10.80 \times 6.25 \text{ mm}$). Pulse Part Number: W3001

Recommended antenna position on PWB for W3001 Antenna

Our test PWB size is 37×80 mm, other sized boards can be used depending on customer device size (minimum 35×35 mm).

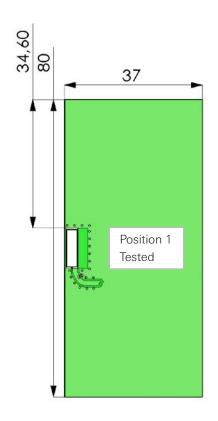



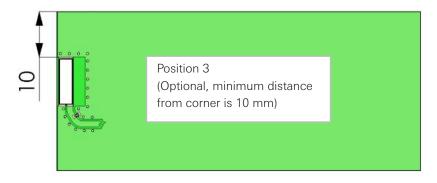






10 x 3.2 x 4.0 mm Ceramic Chip Antenna (On Ground type, Top surface ground removal area 10.80 x 6.25 mm). Pulse Part Number: W3001


Typical Electrical Characteristics (T=25 °C)

Measured on the 80 x 37 mm test board with matching circuit (1.2 pF shunt matching capacitor on feed). Measured in antenna position 1 on PWB layout, see previous page.

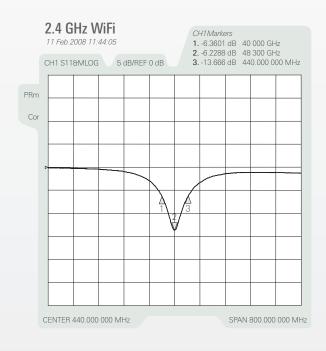

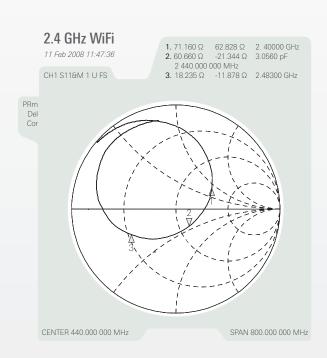







Pulse Finland Oy





 $10 \times 3.2 \times 4.0 \text{ mm}$ Ceramic Chip Antenna (On Ground type, Top surface ground removal area $10.80 \times 6.25 \text{ mm}$). Pulse Part Number: W3001

Typical Free Space Radiation Patterns












 $10 \times 3.2 \times 4.0$ mm Ceramic Chip Antenna (On Ground type, Top surface ground removal area 10.80×6.25 mm). Pulse Part Number: W3001

Packing


Tape and reel packing is used. Carrier tape, reel and box dimensions are presented in following pictures.

Carrier Tape

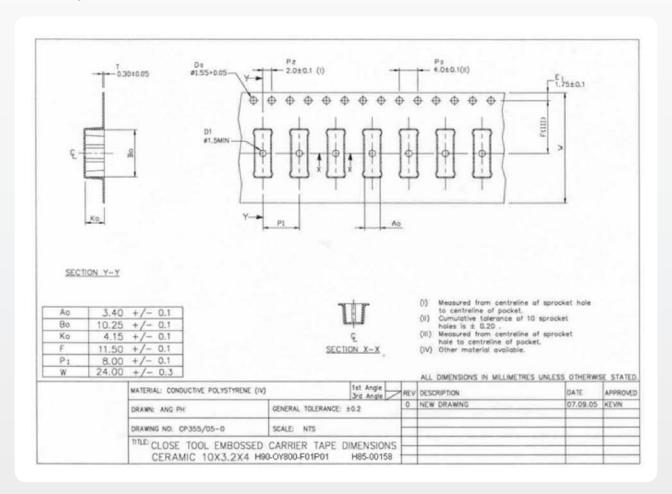

Block Orientation


Antenna soldering pads facing down to the bottom of the carrier tape.

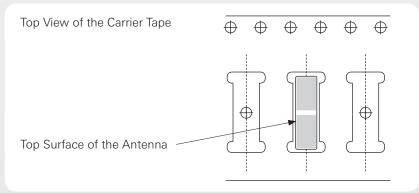



 $10 \times 3.2 \times 4.0$ mm Ceramic Chip Antenna (On Ground type, Top surface ground removal area 10.80×6.25 mm). Pulse Part Number: W3001


Packing Form

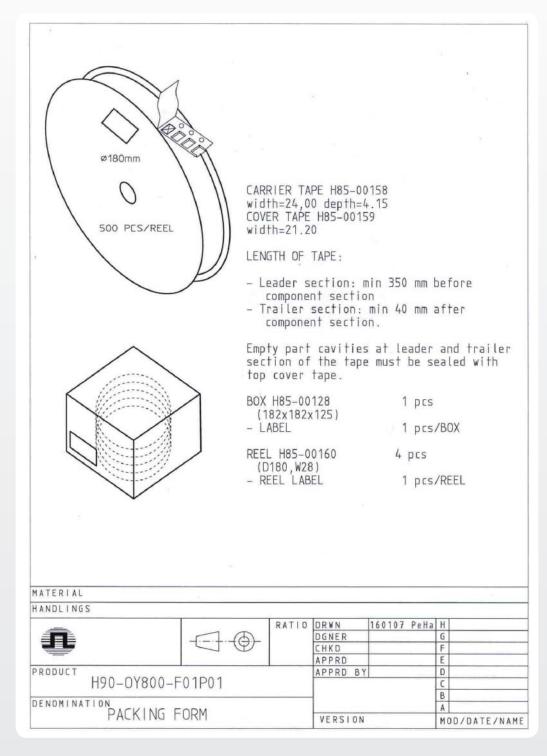



 $10 \times 3.2 \times 4.0 \text{ mm}$ Ceramic Chip Antenna (On Ground type, Top surface ground removal area $10.80 \times 6.25 \text{ mm}$). Pulse Part Number: W3001

Mechanical Outline

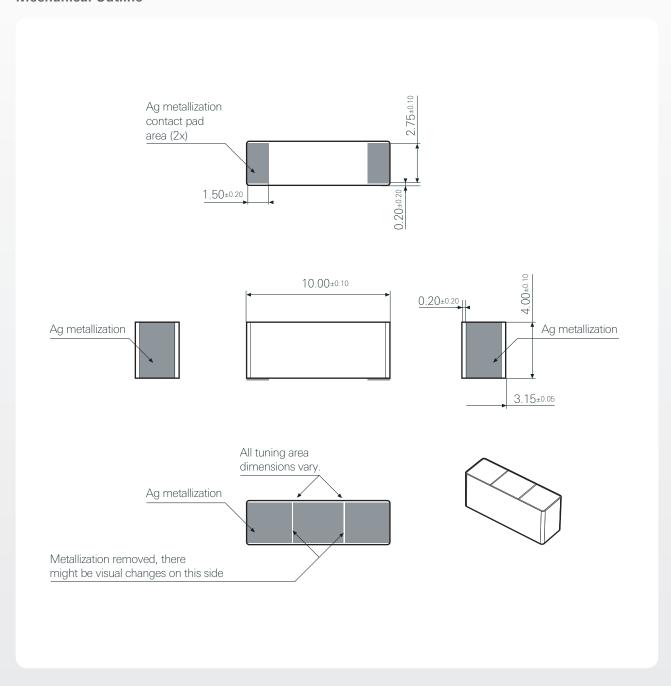



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Antennas category:

Click to view products by PulseLarsen manufacturer:

Other Similar products are found below:

GAN30084EU 930-033-R GW17.07.0250E 1513563-1 EXE902SM APAMPG-117 MAF94383 W3908B0100 W6102B0100 YE572113-30RSMM 108-00014-50 66089-2406 SPDA17RP918 A09-F8NF-M A09-F5NF-M RGFRA1903041A1T W3593B0100 W3921B0100 SIMNA-868 SIMNA-915 SIMNA-433 W1044 W1049B090 A75-001 WTL2449CQ1-FRSMM CPL9C EXB148BN 0600-00060 TRA9020S3PBN-001 Y4503 GD5W-28P-NF MA9-7N GD53-25 GD5W-21P-NF C37 MAF94051 MA9-5N EXD420PL B1322NR QWFTB120 MAF94271 MAF94300 GPSMB301 FG4403 AO-AGSM-OM54 5200232 MIKROE-2349 WCM.01.0111 MIKROE-2393 MIKROE-2352