

**Description**: Antenna GPS/GLONASS/

Beidou/Galileo

PART NUMBER: W3010

## Series: Satellite Navigation System



## Features:

- Omni directional radiation
- Low profile
- Compact size W x L x H (3.2 x 10.0 x 2.0 mm)
- Low weight (310 mg)
- Fully SMD compatible
- Lead free soldering compatible
- Tape and reel packaging
- RoHS Compliant Product
- MSL-1

## **Applications:**

- Systems: GPS/GLONASS/Beidou/Galileo
- 1560 1610 MHz
- Global Navigation
- Asset and Fleet Tracking
- Mobile Devices
- Industrial, Internet of Things

All dimensions are in mm / inches

Issue: 2035

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION

This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden. For more information:

Pulse Worldwide Headquarters 15255 Innovation Drive #100 San Diego, CA 92128 USA Tel:1-858-674-8100 Pulse/Larsen Antennas 18110 SE 34th St Bldg 2 Suite 250 Vancouver, WA 98683 USA Tel: 1-360-944-7551 Europe Headquarters Pulse GmbH & Do, KG Zeppelinstrasse 15 Herrenberg, Germany Tel: 49 7032 7806 0 Pulse (Suzhou) Wireless Products Co, Inc. 99 Huo Ju Road(#29 Bldg,4<sup>th</sup> Phase Suzhou New District Jiangsu Province, Suzhou 215009 PR China Tel: 86 512 6807 9998



#### **TECHNICAL DATA SHEET**

**Description**: Antenna GPS/GLONASS/

Beidou/Galileo

PART NUMBER: W3010

#### **ELECTRICAL SPECIFICATIONS**

Antenna Type Ceramic

Frequency 1560-1610 MHz

Nominal Impedance 50  $\Omega$ 

Return Loss <-12 dB

VSWR min 1.6:1

Efficiency -1.2 dB

Efficiency 75%

Gain Max 3dBi ± 1 dBi

Gain Max RHCP 1dBic ± 1 dBic

Power withstanding 2 watts

Connector type SMD

## **MECHANICAL SPECIFICATIONS**

Size 3.2 x 10 x 2 mm

Weight 0.31 g

MSL (Moisture Sensitivity Level)

## **ENVIRONMENTAL SPECIFICATIONS**

Operating Temperature -40/+85 ° C

Storage Temperature -10/+30 ° C

RoHS Compliant Yes




**Description**: Antenna GPS/GLONASS/

Beidou/Galileo

**PART NUMBER: W3010** 

# **Series:** Satellite Navigation System

## **MECHANICAL DRAWING**

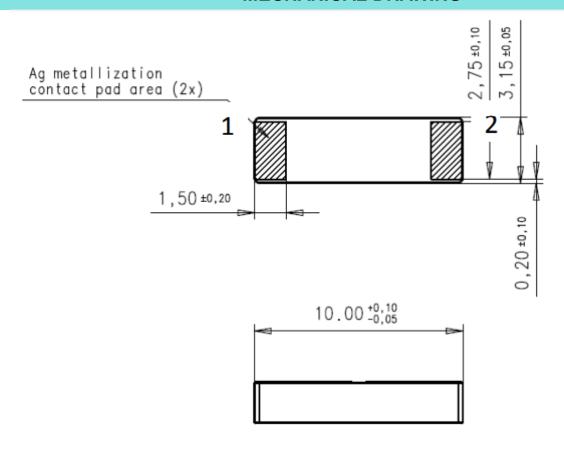

No.	Terminal Name	Terminal Dimensions		
1	Feed / GND	1.50 x 2.75 mm		
2	Feed / GND	1.50 x 2.75 mm		
Antenna is symmetrical. Either of terminals 1 or 2 can be Feed / GND				



**Description**: Antenna GPS/GLONASS/

Beidou/Galileo


PART NUMBER: W3010

# **Series:** Satellite Navigation System


#### OTHER SPECIFICATIONS

# **Terminal Configuration**

Layout

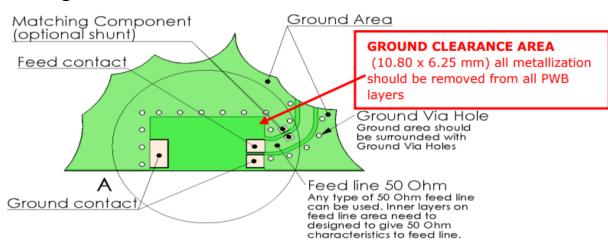

#### Pad dimensions on PWB layout

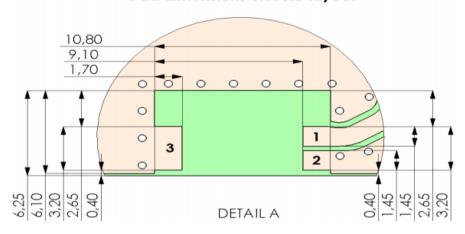

PWB Features				
No.	Terminal Name	Terminal Dimensions		
1	Feed	1.7 x 1.45 mm		
2	GND	1.7 x 1.45 mm		
3	GND	1.7 x 3.20 mm		



**Description**: Antenna GPS/GLONASS/

Beidou/Galileo

PART NUMBER: W3010


# **Series:** Satellite Navigation System

#### **CHARTS**

# Typical Electrical Characteristics (T=25 ° C)

Measured on the 80 x 37 mm test board without matching circuit

## Typical Return Loss S11/ impedance

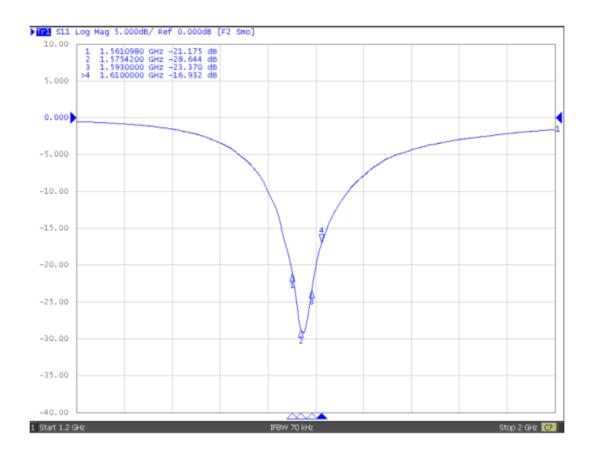





#### **TECHNICAL DATA SHEET**

**Description**: Antenna GPS/GLONASS/


Beidou/Galileo

PART NUMBER: W3010

## **CHARTS**

## Free space efficiency and maximum gain

# **Total Efficiency**

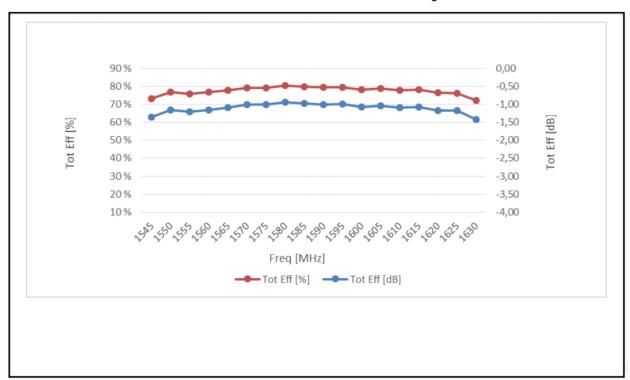



#### **TECHNICAL DATA SHEET**


**Description**: Antenna GPS/GLONASS/

Beidou/Galileo

PART NUMBER: W3010

## **CHARTS**

## Gain

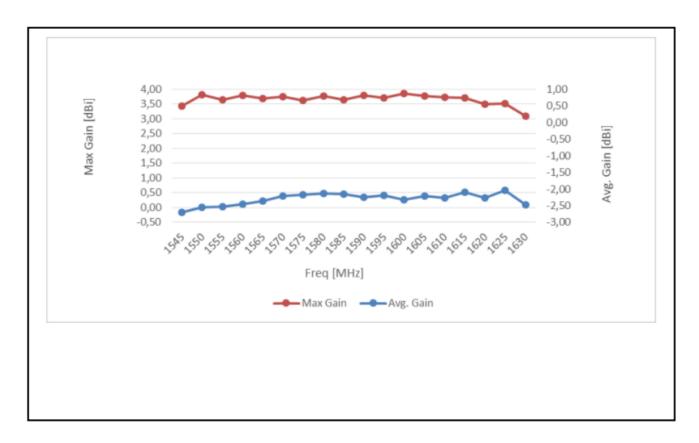



#### **TECHNICAL DATA SHEET**


**Description**: Antenna GPS/GLONASS/

Beidou/Galileo

**PART NUMBER: W3010** 

## **CHARTS**

## **RHCP Gain**

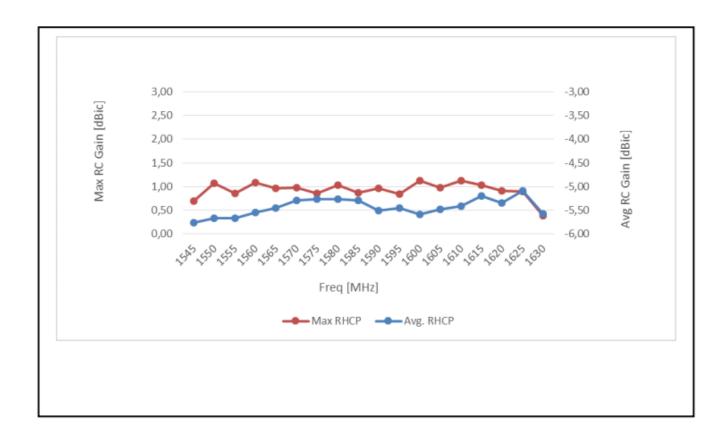



**Description**: Antenna GPS/GLONASS/

Beidou/Galileo


**PART NUMBER: W3010** 

## Series: Satellite Navigation System

### **CHARTS**

# Typical Free space Radiation Patterns

## Radiation pattern coordinates

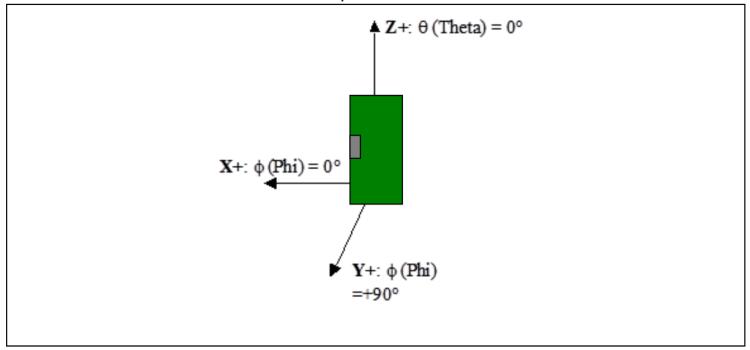




#### **TECHNICAL DATA SHEET**

**Description**: Antenna GPS/GLONASS/

Beidou/Galileo

PART NUMBER: W3010

## **CHARTS**

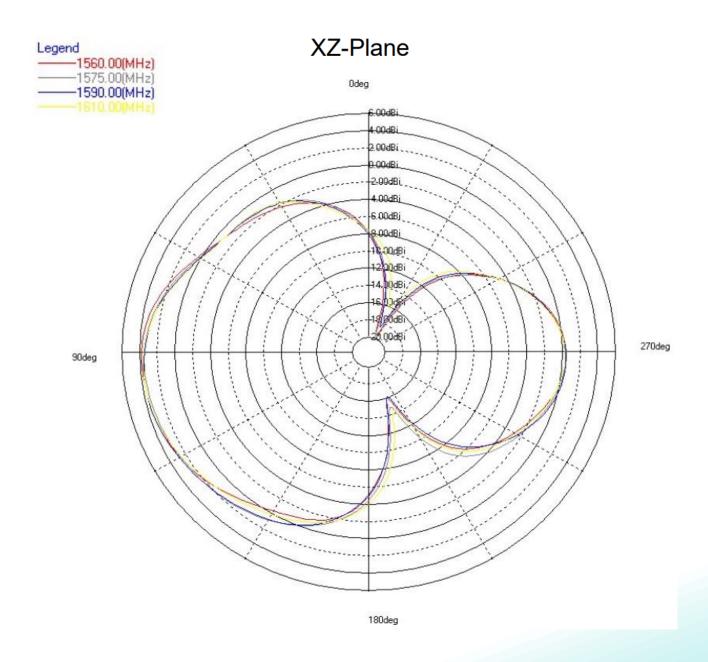






#### **TECHNICAL DATA SHEET**

**Description**: Antenna GPS/GLONASS/

Beidou/Galileo

PART NUMBER: W3010

## **CHARTS**

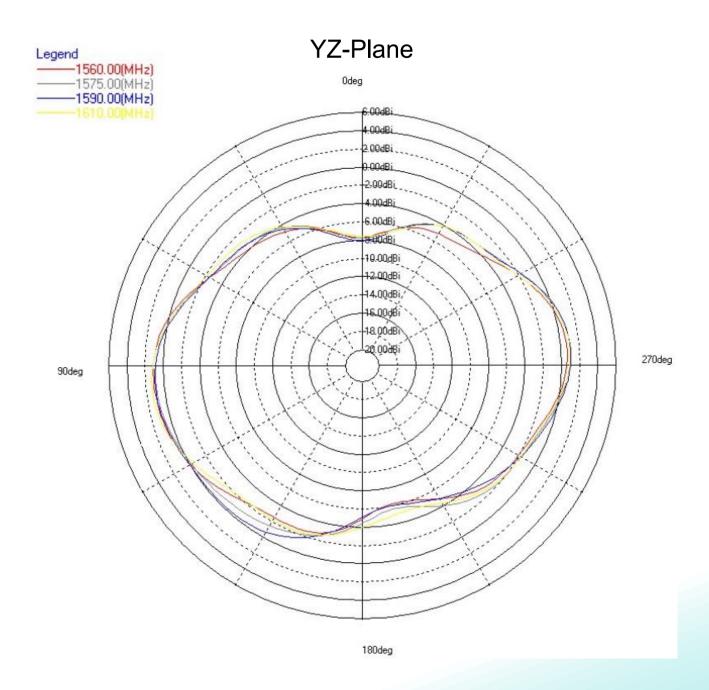








#### **TECHNICAL DATA SHEET**

**Description**: Antenna GPS/GLONASS/

Beidou/Galileo

PART NUMBER: W3010

## **CHARTS**

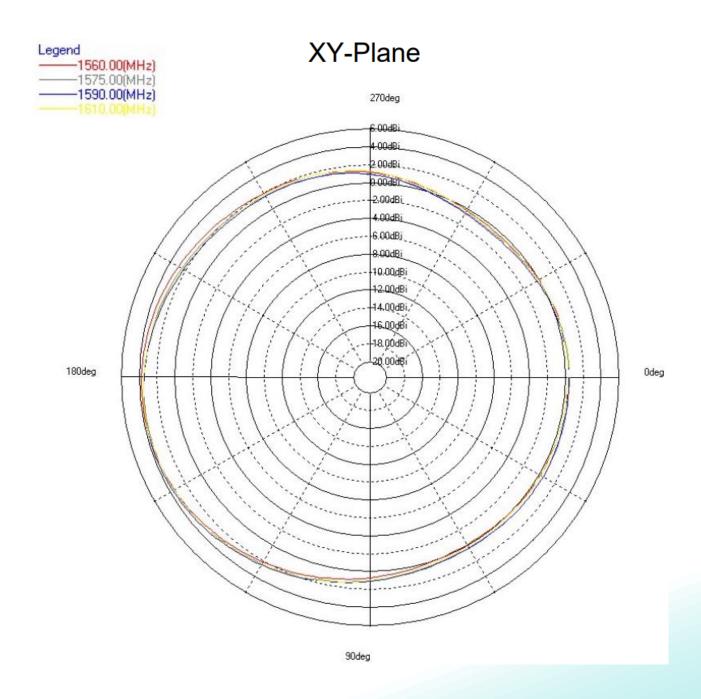





**Description**: Antenna GPS/GLONASS/

Beidou/Galileo

PART NUMBER: W3010

# **Series:** Satellite Navigation System

## Recommendations for ceramic chip antenna storage

## Storage time

Products should be used within 6 months from the day of manufacturers packaging even when they are stored under below mentioned conditions. Longer storage period may decrease the component solderability.

## Storage environmental conditions

To maintain solderability of Pulse ceramic products care must be taken to control the storage and use conditions:

- Do not store or use products in a corrosive atmosphere, especially where chloride, sulphur or sulfide, alkali or acid salts exist in the air. Corrosive gases may cause oxidation of electrodes and reduce solderability
- Keep temperature and humidity stabile and do not exceed the below mentioned minimum and maximum conditions: Temperature: -10 to +30 Deg C Humidity: below 60% RH
- Do not store the products under direct sun light.

It is recommended to keep the products in manufacturers packing (tape&reel) until the time of assembly and soldering process. Air tight vacuum package is recommended in the conditions where it is know to be some corrosive gases.

## Handling

Do not touch the components with bare hands. Protective gloves must be used to prevent contamination of terminals which may cause reduced solderability. Do not touch or damage the silver plated surface by any sharp objects. Soft materials (plastic, wood etc.) must be used if tweezers or other tools are used to pick the components. Avoid any excess mechanical shock or vibration during storage and handling.



**Description**: Antenna GPS/GLONASS/

Beidou/Galileo

PART NUMBER: W3010


# **Series:** Satellite Navigation System

## **Recommendations for reflow soldering process**

Printing stencil thickness 0,15 - 0,25 mm is recommended for the solder paste. The maximum soldering temperature should not exceed 260°C. The temperature profile recommendations for reflow soldering process is presented in the Figures 1 and 2. The reflow profile

presented in figure 1 describes minimum reflow temperatures. The reflow profile presented in figure 2 describes maximum reflow temperatures. located at the center of the coverage area.

	Method of heat transfer	Controlled hot air convection
1	Average temperature gradient in preheating	2.5 °C/s
2	Soak time	2-3 minutes
3	Max temperature gradient in reflow	3 °C/s
4	Time above 217 °C	Max 30 sec
5	Peak temperature in reflow	230 ℃ for 10 seconds
6	Temperature gradient in cooling	Max -5 °C/s

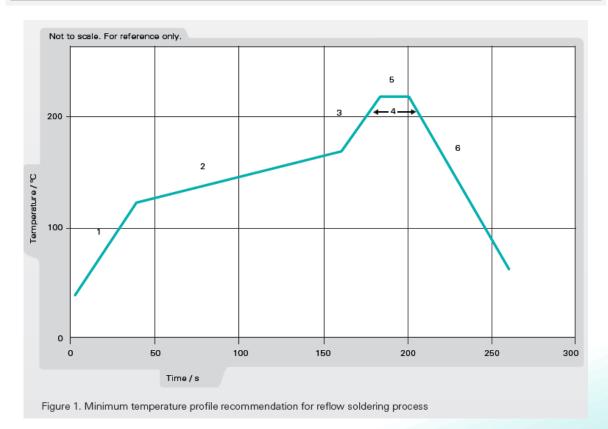

Issue: 2035



**Description**: Antenna GPS/GLONASS/

Beidou/Galileo

**PART NUMBER: W3010** 

# Series: Satellite Navigation System

## Recommendations for reflow soldering process

	Method of heat transfer	Controlled hot air convection
1	Average temperature gradient in preheating	2.5 °C/s
2	Soak time	2-3 minutes
3	Max temperature gradient in reflow	3 °C/s
4	Time above 217 °C	Max 60 sec
5	Time above 230 °C	Max 50 sec
6	Time above 250 °C	Max 10 sec
7	Peak temperature in reflow	260 °C for 5 seconds
8	Temperature gradient in cooling	Max -5 °C/s

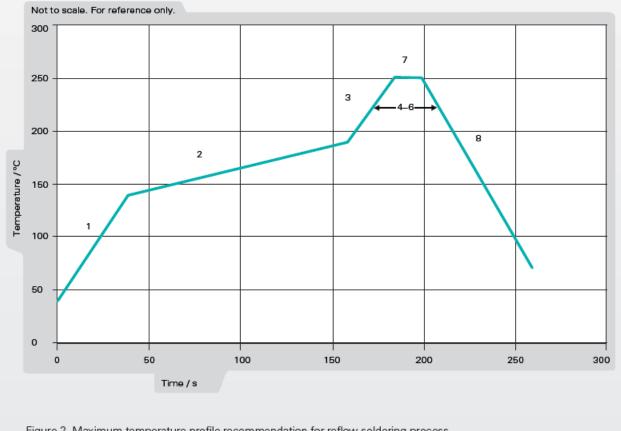


Figure 2. Maximum temperature profile recommendation for reflow soldering process



#### TECHNICAL DATA SHEET


**Description**: Antenna GPS/GLONASS/

Beidou/Galileo

PART NUMBER: W3010

#### **PACKAGING**


Taping package 1000PCS/Reel 3000PCS/Small box 6000PCS/Carton box

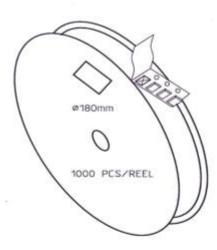

CARRIER TAPE H85-00188 width=24,00 depth=2.20 COVER TAPE H85-00159 width=21.20

#### LENGTH OF TAPE:

- Leader section: min 350 mm before component section
- Trailer section: min 40 mm after component section.



BOX H85-00128 (182x182x125)

1 pcs 1 pcs/BOX LABEL

REEL H85-00160 (D180, W28)

REEL LABEL


4 pcs

1 pcs/REEL











## **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Antenna Development Tools category:

Click to view products by PulseLarsen manufacturer:

Other Similar products are found below:

 0868AT43A0020-EB1SMA
 EVALBGSA141MN10TOBO1
 A10393-U1
 PCSD.06.A
 B5771-U1
 KIT-LTE-GNSS-01
 KIT-WIFI-ISM-01

 A10472-U1
 REFLECTOR-EVB-1
 A10340-U1
 ACAG0201-2450-EVB
 ACAG0301-15752450-EVB
 ACAG0301-1575-EVB
 ACAG0301-1575-EVB
 ACAG0301-1575-EVB
 ACAG1204-868-EVB
 ACAG1204-915-EVB

 ACAR0301-SW2-EVB
 ACAR3005-C2WB-EVB
 ACAR3005-S824-EVB
 ACAR3705-S698-EVB
 ACAR4008-S698-EVB
 A10137-D

 A10194-U1
 A10204-U1
 A5645H-EVB-1
 A5645-U1
 A5887H-EVB-1
 A6111-U1
 M20057-EVB-1
 SR42W001-U1
 SR42W009-U1

 SR4G008-U1
 SR4G013-U1
 SR4G053-EVB-1
 SR4L049-EVB-1
 SRC5G027-U1
 SRCW004-U1
 1001312-01
 M310220-01
 M620720-01

 M830120-01
 M830520-01
 EB\_NN01-105A
 EB\_NN02-201-5G
 CCKLTE450-NA
 AEK-GNCP-TH258L15
 MPA-104-KIT