


THREE-TERMINAL POSITIVE VOLTAGE REGULATOR

SOT-89



FEATURES

Maximum Output current I_O : 0.1 A

1. OUT

Output voltage V_O : 5 V

2. GND

Continuous total dissipation

3. IN

 P_D : 0.5 W ($T_a = 25^\circ C$)


ABSOLUTE MAXIMUM RATINGS (Operating temperature range applies unless otherwise specified)

Parameter	Symbol	Value	Unit
Input Voltage	V_I	30	V
Operating Junction Temperature Range	T_{OPR}	0~+125	°C
Storage Temperature Range	T_{STG}	-55~+150	°C

ELECTRICAL CHARACTERISTICS ($V_I=10V$, $I_O=40mA$, $C_i=0.33\mu F$, $C_o=0.1\mu F$, unless otherwise specified)

Parameter	Symbol	Test conditions	MIN	TYP	MAX	UNIT
Output voltage	V_O	25°C	4.8	5.0	5.2	V
		7V≤ V_I ≤20V, $I_O=1mA$ ~40mA	4.75	5.0	5.25	V
		$I_O=1mA$ ~70mA	4.75	5.0	5.25	V
Load Regulation	ΔV_O	$I_O=1mA$ ~100mA	25°C	15	60	mV
		$I_O=1mA$ ~40mA	25°C	8	30	mV
Line regulation	ΔV_O	7V≤ V_I ≤20V		32	150	mV
		8V≤ V_I ≤20V	25°C	26	100	mV
Quiescent Current	I_Q		25°C	3.8	6	mA
Quiescent Current Change	ΔI_Q	8V≤ V_I ≤20V	0-125°C		1.5	mA
	ΔI_Q	1mA≤ V_I ≤40mA	0-125°C		0.1	mA
Output Noise Voltage	V_N	10Hz≤f≤100KHz	25°C	42		uV
Ripple Rejection	RR	8V≤ V_I ≤20V, f=120Hz	0-125°C	41	49	dB
Dropout Voltage	V_d		25°C	1.7		V


TYPICAL APPLICATION

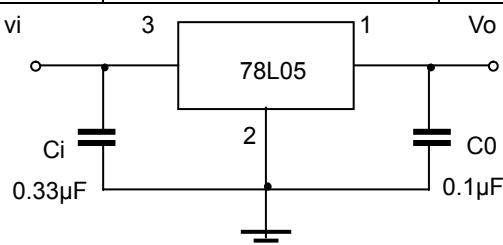


Note: Bypass capacitors are recommended for optimum stability and transient response and should be located as close as possible to the regulators.

Typical Characteristics


78L05/12/24 Output Characteristics

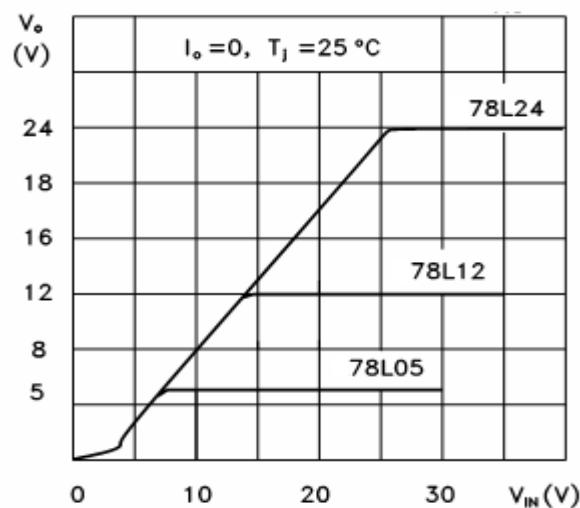


78L05/12/24 Thermal Shutdown

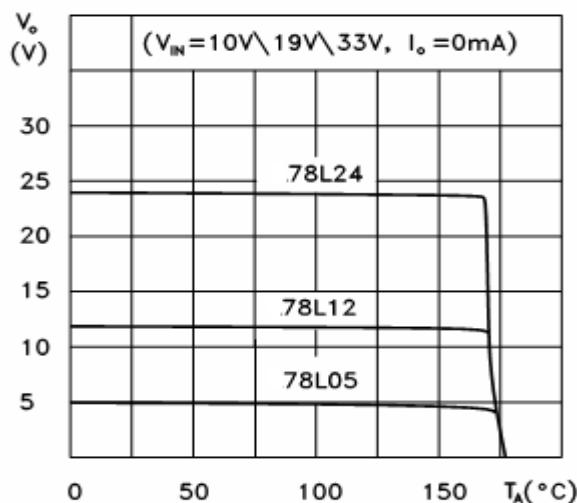


78L05 Quiescent Current vs Input Voltage

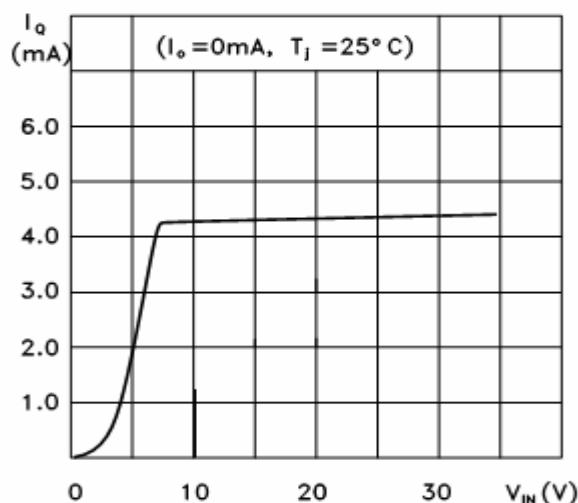


78L05/12/24 Load Characteristics

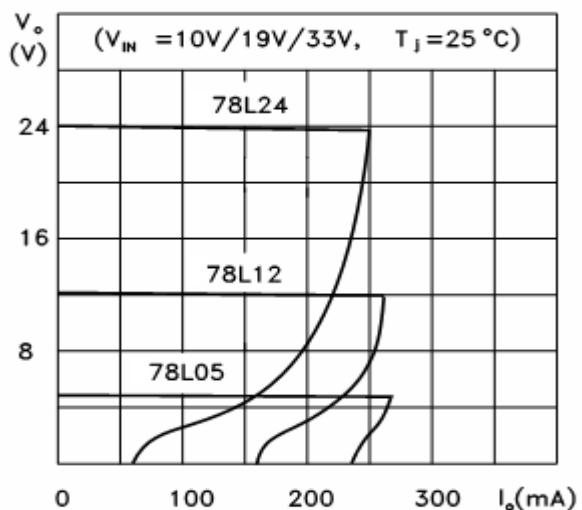

78L00 Series Short Circuit Output Current

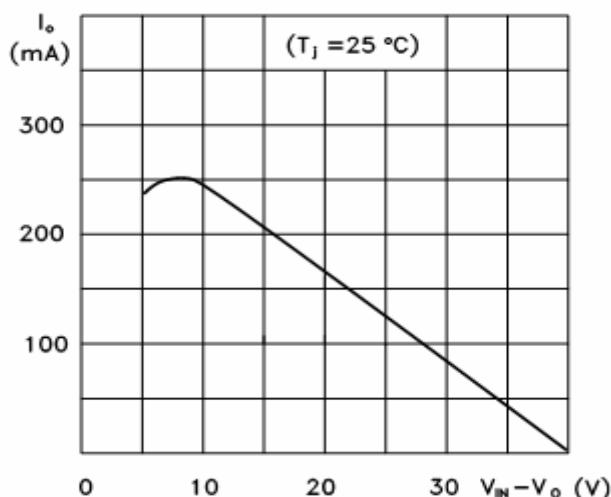

Power dissipation vs. ambient temperature

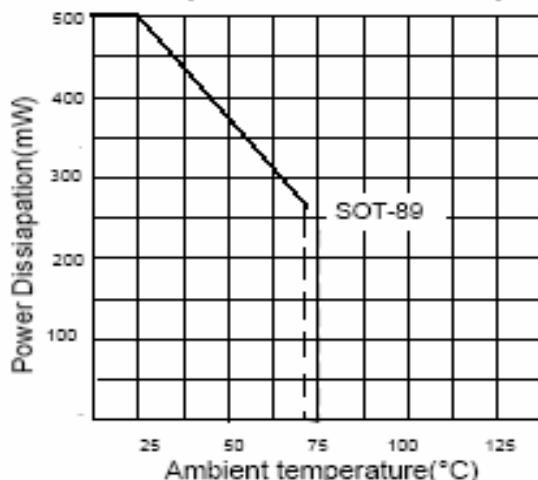

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Linear Voltage Regulators](#) category:

Click to view products by [PUOLOP](#) manufacturer:

Other Similar products are found below :

[LV56831P-E](#) [LV5684PVD-XH](#) [MCDTSA6-2R](#) [L7815ACV-DG](#) [PQ3DZ53U](#) [LV56801P-E](#) [TLE42794G](#) [L78L05CZ/1SX](#) [L78LR05DL-MA-E](#) [636416C](#) [714954EB](#) [BA033LBSG2-TR](#) [LV5680P-E](#) [L78M15CV-DG](#) [TLS202B1MBV33HTSA1](#) [L79M05T-E](#) [TLS202A1MBVHTSA1](#) [L78LR05D-MA-E](#) [NCV317MBTG](#) [NTE7227](#) [LV5680NPVC-XH](#) [LT1054CN8](#) [MP2018GZD-5-Z](#) [MP2018GZD-33-Z](#) [MIC5281-3.3YMM](#) [RT9078-28GQZ](#) [MC78L06BP-AP](#) [TA48LS05F\(TE85L,F\)](#) [TA78L12F\(TE12L,F\)](#) [TC47BR5003ECT](#) [TCR2LN12,LF\(S](#) [TCR2LN28,LF\(S](#) [TCR2LN30,LF\(S](#) [TCR3DF295,LM\(CT](#) [TCR3DF40,LM\(CT](#) [BA178M20CP-E2](#) [L78M12ABDT](#) [LM7812SX/NOPB](#) [LR645N3-G-P003](#) [LR645N3-G-P013](#) [ZXTR2005P5-13](#) [SCD7812BTG](#) [TCR3DF335,LM\(CT](#) [ZXTR2012K-13](#) [TLE42994E](#) [V33](#) [ZXTR2008K-13](#) [ZXTR2005K-13](#) [LA5693D-E](#) [L88R05DL-E](#) [ADP3300ARTZ-2.7RL7](#)