

THREE-TERMINAL POSITIVE VOLTAGE REGULATOR

SOT-89

FEATURES

Maximum Output current

$I_{OM}: 0.1\text{ A}$

Output voltage

$V_o: 12\text{ V}$


Continuous total dissipation

$P_D: 0.50\text{ W}$

1.OUT

2.GND

3.IN




ABSOLUTE MAXIMUM RATINGS (Operating temperature range applies unless otherwise specified)

Parameter	Symbol	Value	Unit
Input Voltage	V_i	35	V
Operating Junction Temperature Range	T_{OPR}	0-+125	°C
Storage Temperature Range	T_{STG}	-55-+150	°C

ELECTRICAL CHARACTERISTICS ($V_i=19\text{V}$, $I_o=40\text{mA}$, $C_i=0.33\mu\text{F}$, $C_o=0.1\mu\text{F}$, unless otherwise specified)

Parameter	Symbol	Test conditions	MIN	TYP	MAX	UNIT	
Output voltage	V_o	25°C	11.5	12	12.5	V	
		$14\text{V} \leq V_i \leq 27\text{V}$, $I_o=1\text{mA}-40\text{mA}$	0-125°C	11.4	12	12.6	V
		$I_o=1\text{mA}-70\text{mA}$		11.4	12	12.6	V
Load Regulation	ΔV_o	$I_o=1\text{mA}-100\text{mA}$, 25°C		22	100	mV	
		$I_o=1\text{mA}-40\text{mA}$, 25°C		13	50	mV	
Line regulation	ΔV_o	$14.5\text{V} \leq V_i \leq 27\text{V}$, 25°C		55	250	mV	
		$16\text{V} \leq V_i \leq 27\text{V}$, 25°C		49	200	mV	
Quiescent Current	I_q	25°C		4.3	6.5	mA	
Quiescent Current Change	ΔI_q	$16\text{V} \leq V_i \leq 27\text{V}$, 0-125°C			1.5	mA	
	ΔI_q	$1\text{mA} \leq I_o \leq 40\text{mA}$, 0-125°C			0.1	mA	
Output Noise Voltage	V_N	$10\text{Hz} \leq f \leq 100\text{KHz}$, 25°C		70		uV	
Ripple Rejection	RR	$15\text{V} \leq V_i \leq 25\text{V}$, $f=120\text{Hz}$, 0-125°C	37	42		dB	
Dropout Voltage	V_d	25°C		1.7		V	


TYPICAL APPLICATION

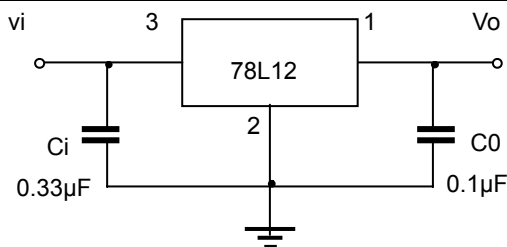


Note : Bypass capacitors are recommended for optimum stability and transient response and should be located as close as possible to the regulators.

Typical Characteristics


78L05/12/24 Output Characteristics

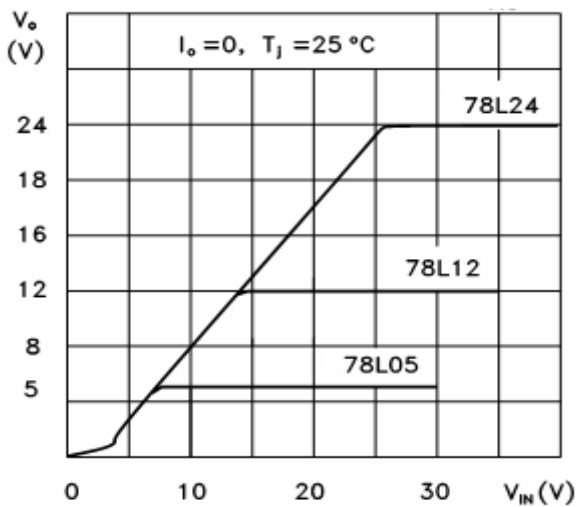


78L05/12/24 Load Characteristics

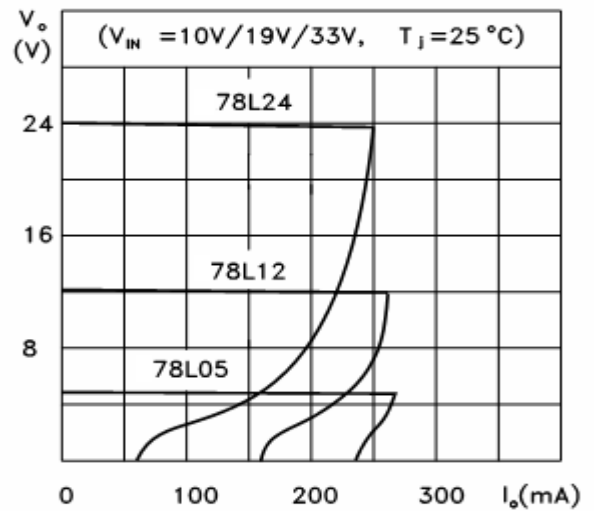


78L05/12/24 Thermal Shutdown

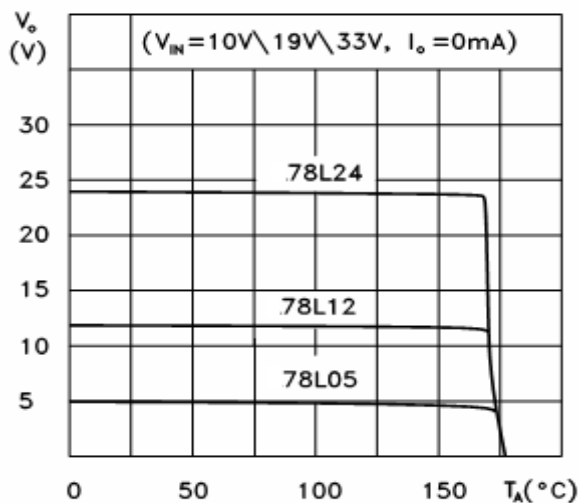


78L00 Series Short Circuit Output Current

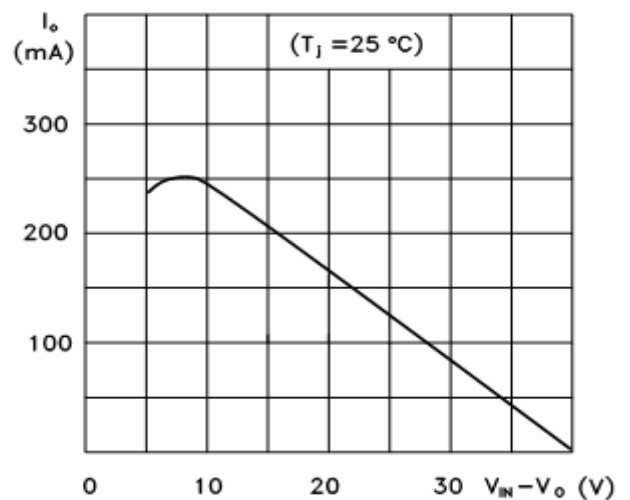

78L05 Quiescent Current vs Input Voltage

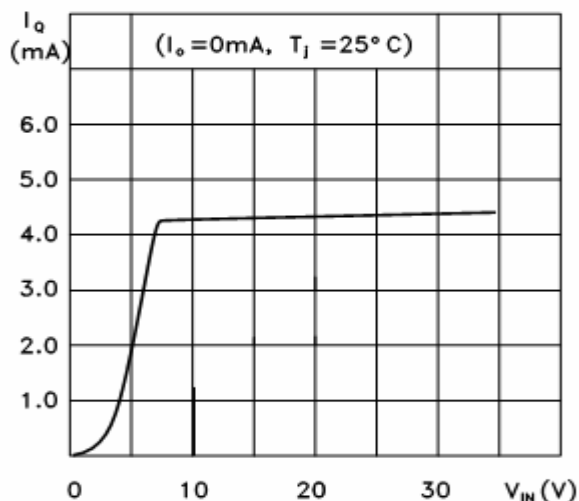

Power dissipation vs. ambient temperature

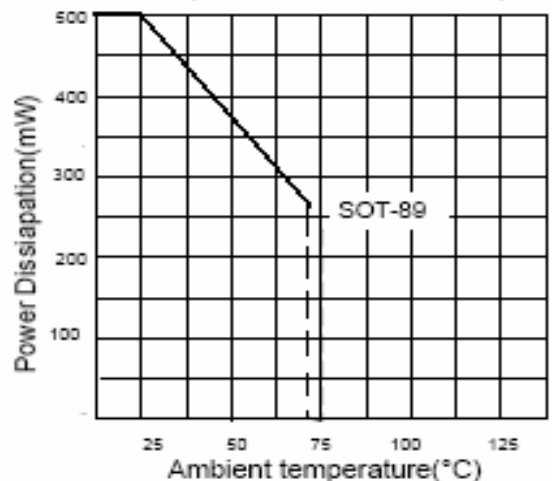

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Linear Voltage Regulators](#) category:

Click to view products by [PUOLOP](#) manufacturer:

Other Similar products are found below :

[LV56831P-E](#) [LV5684PVD-XH](#) [MCDTSA6-2R](#) [L7815ACV-DG](#) [PQ3DZ53U](#) [LV56801P-E](#) [TLE42794G](#) [L78L05CZ/1SX](#) [L78LR05DL-MA-E](#) [636416C](#) [714954EB](#) [BA033LBSG2-TR](#) [LV5680P-E](#) [L78M15CV-DG](#) [TLS202B1MBV33HTSA1](#) [L79M05T-E](#) [TLS202A1MBVHTSA1](#) [L78LR05D-MA-E](#) [NCV317MBTG](#) [NTE7227](#) [LV5680NPVC-XH](#) [LT1054CN8](#) [MP2018GZD-5-Z](#) [MP2018GZD-33-Z](#) [MIC5281-3.3YMM](#) [RT9078-28GQZ](#) [MC78L06BP-AP](#) [TA48LS05F\(TE85L,F\)](#) [TC47BR5003ECT](#) [TCR2LN12,LF\(S](#) [TCR2LN28,LF\(S](#) [TCR2LN30,LF\(S](#) [TCR3DF295,LM\(CT](#) [TCR3DF40,LM\(CT](#) [BA178M20CP-E2](#) [L78M05TL-TL-E](#) [L78M12ABDT](#) [LR645N3-G-P003](#) [LR645N3-G-P013](#) [ZXTR2005P5-13](#) [SCD7812BTG](#) [TCR3DF335,LM\(CT](#) [ZXTR2012K-13](#) [TLE42994E V33](#) [ZXTR2008K-13](#) [ZXTR2005K-13](#) [L88R05DL-E](#) [ADP3300ARTZ-2.7RL7](#) [LM120K-15/883](#) [IFX54441LDVXUMA1](#)