

General Description

The DW01A battery protection IC is designed to protect lithium-ion/polymer battery from damage or degrading the lifetime due to overcharge, overdischarge, and/or overcurrent for one-cell lithium-ion/polymer battery powered systems, such as cellular phones.

The ultra-small package and less required external components make it ideal to integrate the DW01A into the limited space of battery pack. The accurate $\pm 50\text{mV}$ overcharging detection voltage ensures safe and full utilization charging. The very low standby current drains little current from the cell while in storage.

Features

- Reduction in Board Size due to Miniature Package SOT-23-6.
- Ultra-Low Quiescent Current at $3 \mu\text{A}$ ($V_{cc}=3.6\text{V}$).
- Overdischarge Current at $4 \mu\text{A}$ ($V_{cc}=1.8\text{V}$).
- Precision Overcharge Protection Voltage $4.3\text{V} \pm 50\text{mV}$
- Two Detection Levels for Overcurrent Protection.
- Delay times are generated by internal circuits. No external capacitors required.

Ordering Information

DW01A

PACKAGE TYPE
SOT-23-6TEMPERATURE RANGE
 $-40^\circ\text{C} \sim +85^\circ\text{C}$ OVERCHARGE PROTECTION
 $4.3\text{V} \pm 50\text{mV}$

Applications


- Protection IC for One-Cell Lithium-Ion / Lithium-Polymer Battery Pack

Product Name List


Product	Package	Overcharge detection voltage [V _{OCP}] (V)	Overcharge release voltage [V _{OCR}] (V)	Overdischarge detection voltage [V _{ODP}] (V)	Overdischarge release voltage [V _{ODR}] (V)	Overcurrent detection voltage [V _{OI1}] (mV)	0V battery charge function	Stand by function release
DW01A	SOT-23-6	4.300±0.050	4.100±0.050	2.50±0.1	2.90±0.1	150±20	available	Auto Recovery

Pin Configuration


Pin No.	Symbol	Description
1	OD	MOSFET gate connection pin for discharge control
2	VM	Input pin for current sense, charger detect
3	OC	MOSFET gate connection pin for charge control
4	TD	Test pin for reduce delay time
5	VCC	Power supply, through a resistor (R1)
6	GND	Ground pin

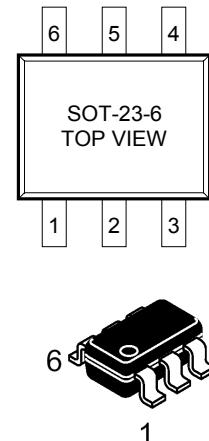

Functional Block Diagram

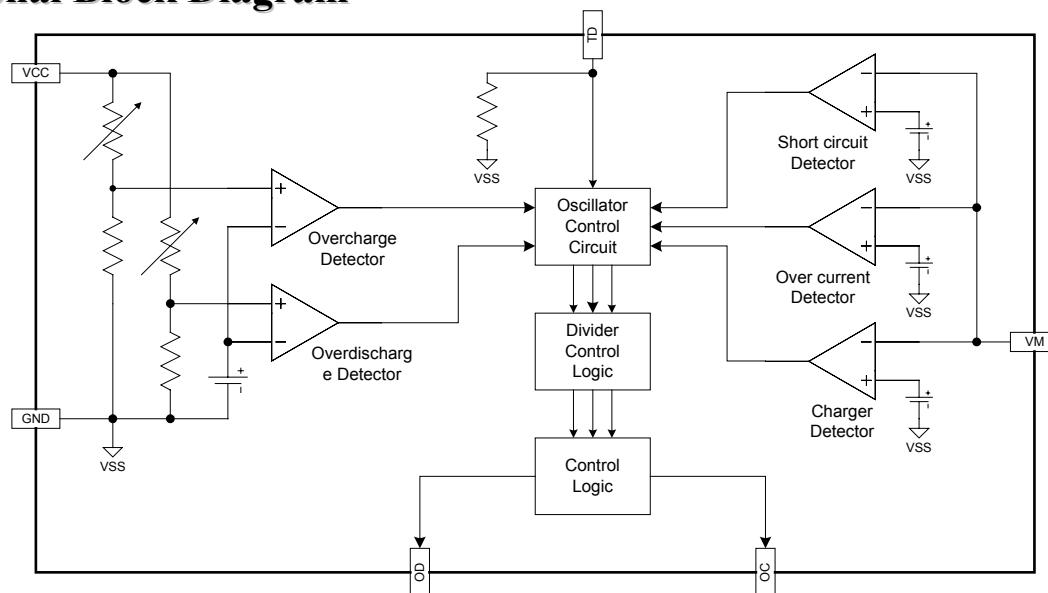

Typical Application Circuit

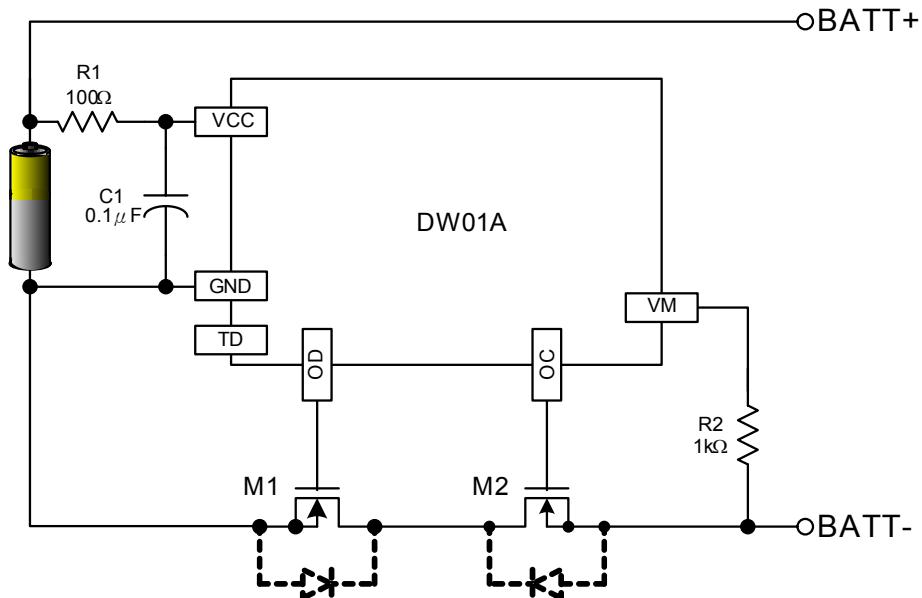

Absolute Maximum Ratings

(VSS=0V, Ta=25°C unless otherwise specified)

Item	Symbol	Rating	Unit
Input voltage between VDD and VSS	VDD	0.3 to 10	V
OC output pin voltage	VOC	VDD-24 to VDD+0.3	V
OD output pin voltage	VOD	VSS-0.3 to VDD+0.3	V
CS input pin voltage	VCS	VDD-24 to VDD+0.3	V
Operating Temperature Range	TOP	-40 to +85	°C
Storage Temperature Range	TST	-40 to +125	°C


Electrical Characteristics

(Ta=25°C unless otherwise specified)


PARAMETER	TEST CONDITIONS	SYMBOL	Min	Typ	Max	UNIT
Supply Current	Vcc=3.6V	Icc		3.0	6.0	µA
Power-Down Current	Vcc=1.8V	IPD			4	µA
0V Battery Charge Starting Charger Voltage		V0CHA	1.2			V
Overcharge Protection Voltage		Voc	4.25	4.30	4.35	V
Overcharge Release Voltage		VOCR	4.05	4.10	4.15	V
Overdischarge Protection Voltage		VOD	2.40	2.50	2.60	V
Overdischarge Release Voltage		VODR	2.80	2.90	3.00	V
Overcurrent Protection Voltage		VEDI	130	150	170	mV
Short Current Protection Voltage		Vshort	0.82	1.36	1.75	V
Overcharge Delay Time		T _{OC}		110	200	ms
Overdischarge Delay Time	Vcc=3.6V to 2.4V	T _{OD}		55	200	ms
Overcurrent Delay Time (1)		T _{EDI}		7	20	ms
Overcurrent Delay Time (2)		T _{short}		400	600	µs
OD Pin Output "H" Voltage	Vcc=3.9V ICO=10uA	DoutH	Vcc-0.4	Vcc-0.2		V
OD Pin Output "L" Voltage	Vcc=2V IDO=10uA	DoutL		0.2	0.5	V
OC Pin Output "H" Voltage	Vcc=3.9V ICO=10uA	CoutH	Vcc-0.1	Vcc-0.02		V

Timing Diagram


1. Overcharge Condition → Load Discharging → Normal Condition

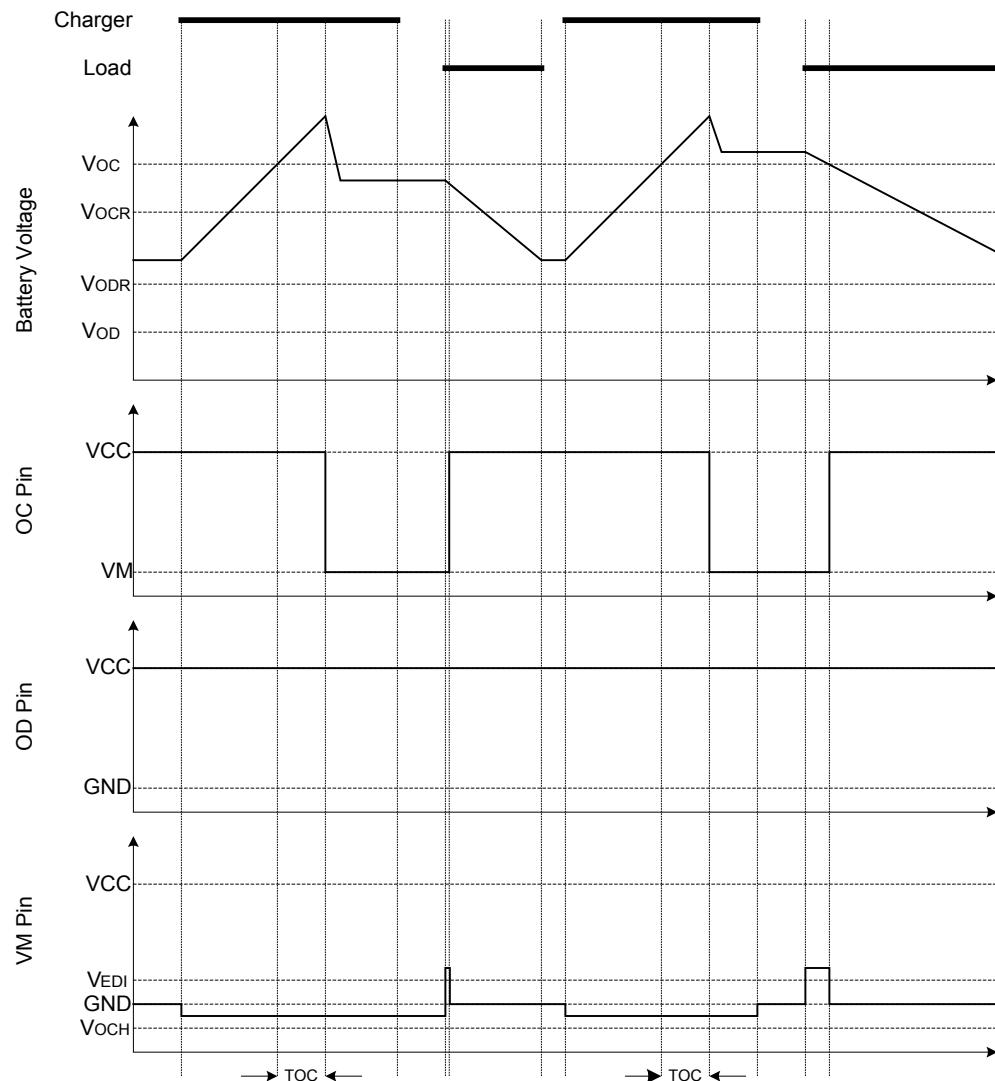

2. Overdischarge Condition → Charging by a Charger → Normal Condition

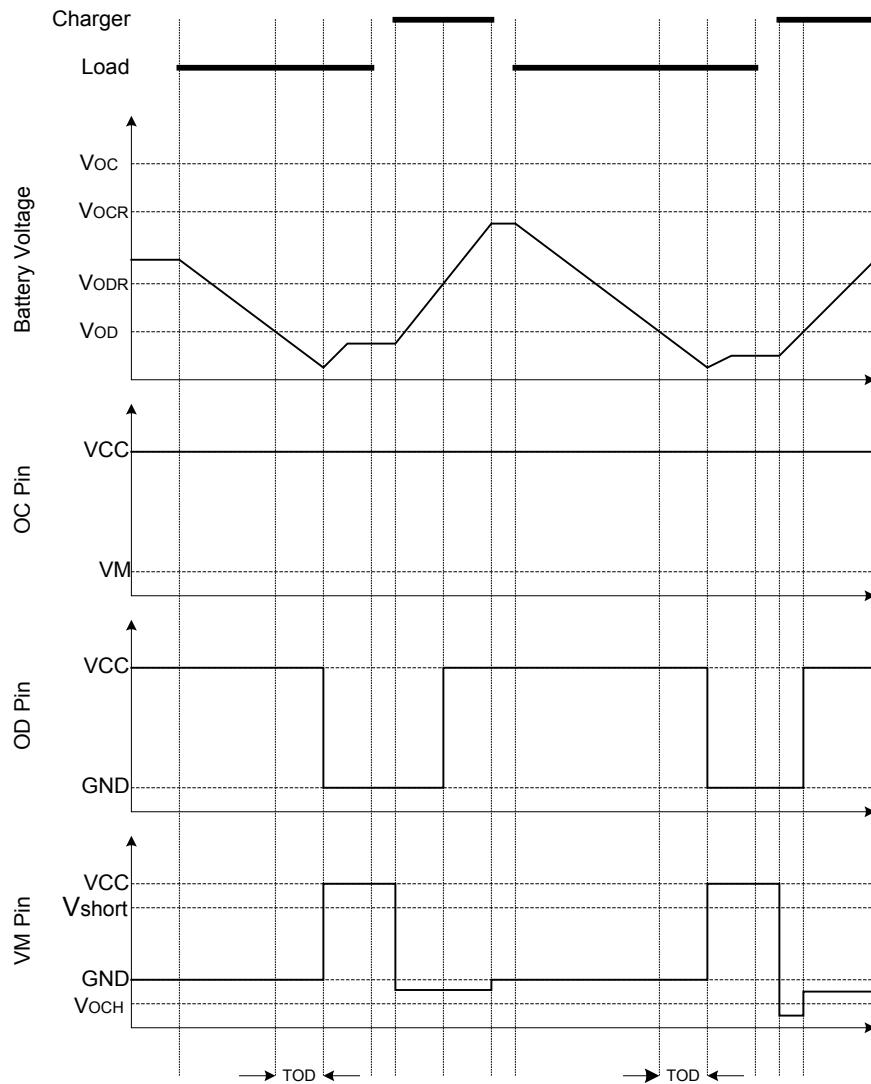

3. Over Current Condition → Normal Condition

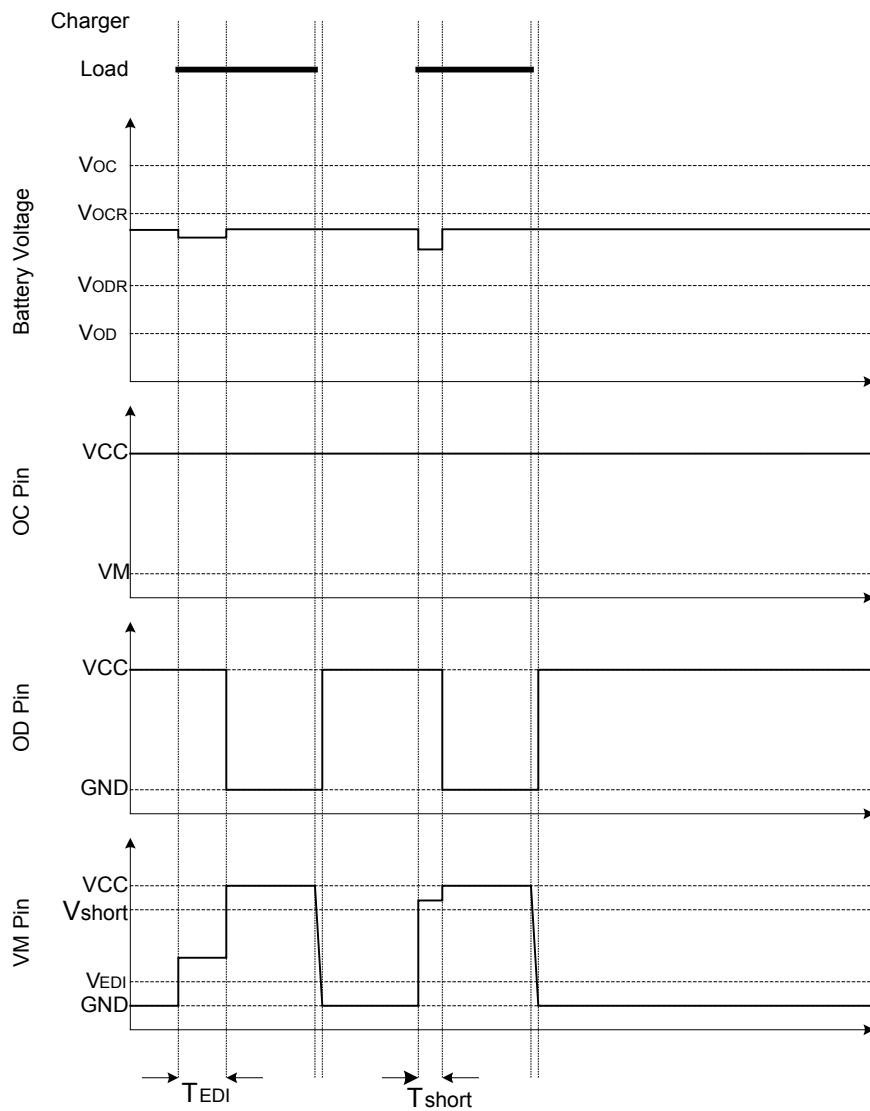

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Battery Management category:

Click to view products by PUOLOP manufacturer:

Other Similar products are found below :

[LV5117AV-TLM-H](#) [VN5R003HTR-E](#) [NCP1855FCCT1G](#) [FAN54063UCX](#) [NCP367DPMUEBTBG](#) [LC05132C01NMTTTG](#) [ISL78714ANZ](#)
[CM1104-EH](#) [CM1104-DBB](#) [CM1104-MBB](#) [XC6801A421MR-G](#) [ISL95521BHRZ](#) [ISL95521BIRZ](#) [MP2639AGR-P](#) [S-82D1AAE-A8T2U7](#)
[S-82D1AAA-A8T2U7](#) [S-8224ABA-I8T1U](#) [MC33772CTA1AE](#) [MC33772CTC0AE](#) [BQ28Z610DRZR-R1](#) [MCP73832-4ADI/MC](#)
[MCP73832T-2DCIMC](#) [MCP73833T-AMIMF](#) [MCP73833T-AMI/UN](#) [MCP73838-NVI/MF](#) [MCP73213-A6BI/MF](#) [MCP73831-2ACI/MC](#)
[MCP73831T-2ATIMC](#) [MCP73832-2ACI/MC](#) [MCP73832T-3ACIMC](#) [MCP73833T-FCI/MF](#) [MCP73853-IML](#) [BQ25895RTWR](#)
[BQ29704DSER](#) [BQ78Z100DRZR](#) [ISL78610ANZ](#) [FAN5403UCX](#) [NCP367DPMUECTBG](#) [FAN54015BUCX](#) [MAX8934BETI+](#)
[BQ24311DSGR](#) [BQ25100HYFPR](#) [BQ29707DSER](#) [MAX17048G+T10](#) [BQ24130RHLR](#) [BQ25120AYFPR](#) [BQ29703DSER](#) [BQ771807DPJR](#)
[BQ25120AYFPT](#) [MAX17055ETB+T](#)