


**SCHOTTKY BARRIER DIODE**


**APPLICATIONS**

- High frequency switch power supply
- Free wheeling diodes, polarity protection applications



**FEATURES**

- Common cathode structure
- Low power loss, high efficiency
- High Operating Junction Temperature
- Guard ring for overvoltage protection, High reliability
- RoHS product

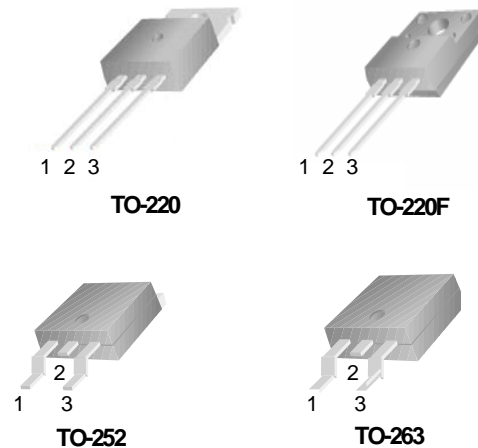

**ORDER INFORMATION**

Product	Package	Pin Assignment			Packing
		1	2	3	
MBR10100CT	TO-220	A	K	A	Tube
MBR10100FCT	TO-220F	A	K	A	Tube
MBR10100YCT	TO-263	A	K	A	Tape Reel
MBR10100DCT	TO-252	A	K	A	Tape Reel

**ABSOLUTE RATINGS (T<sub>c</sub>=25°C)**

Parameter		Symbol	Value	Unit
Repetitive peak reverse voltage		V <sub>RRM</sub>	100	V
Maximum DC blocking voltage		V <sub>DC</sub>	100	V
Average forward current	T <sub>C</sub> =150°C (TO-220/263/ TO-252)	I <sub>F(AV)</sub>	10	A
	T <sub>C</sub> =125°C (TO-220F)		5	
Surge non repetitive forward current 8.3 ms single half-sine-wave (JEDEC Method)		I <sub>FSM</sub>	152	A
Maximum junction temperature		T <sub>j</sub>	150	°C
Storage temperature range		T <sub>STG</sub>	-40~+150	°C




**ELECTRICAL CHARACTERISTICS**

Parameter	Tests conditions		Value(min)	Value(typ)	Value(max)	Unit
$I_R$	$T_j = 25^\circ\text{C}$	$V_R = V_{RRM}$			5	$\mu\text{A}$
$V_F$	$T_j = 25^\circ\text{C}$	$I_F = 5\text{A}$		0.80	0.85	V

**THERMAL CHARACTERISTICS**

Parameter		Symbol	Value(min)	Value(max)	Unit
Thermal resistance from junction to case	TO-220	$R_{th(j-c)}$		2.0	$^\circ\text{C/W}$
	TO-263			2.0	
	TO-252			3.0	
	TO-220F			4.0	

**ELECTRICAL CHARACTERISTICS (curves)**

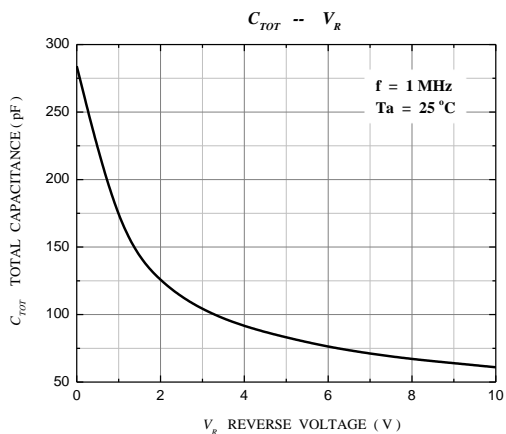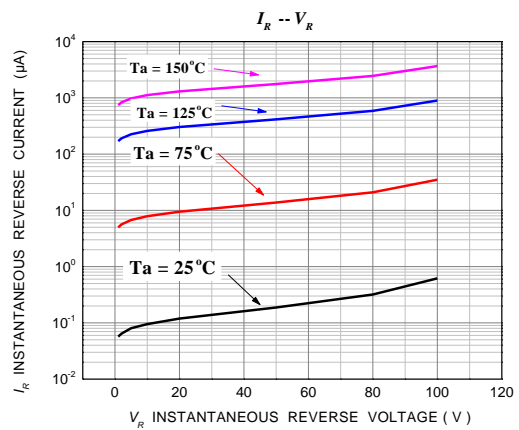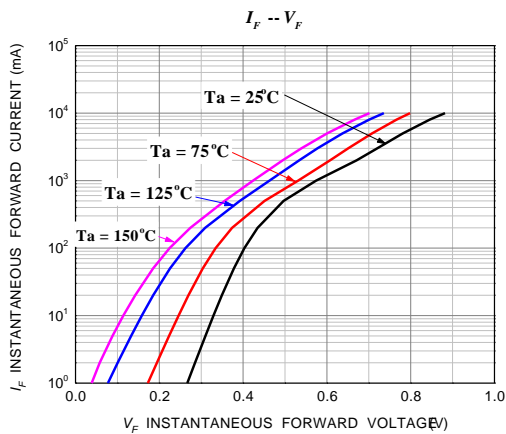

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Schottky Diodes & Rectifiers](#) category:*

*Click to view products by [PUOLOP](#) manufacturer:*

Other Similar products are found below :

[MA4E2039](#) [MA4E2508M-1112](#) [MBR1545CT](#) [MMBD301M3T5G](#) [RB160M-50TR](#) [D83C](#) [BAS16E6433HTMA1](#) [BAT 54-02LRH E6327](#)  
[NRVBAF360T3G](#) [NSR05F40QNXT5G](#) [NTE555](#) [JANS1N6640](#) [SK310-T](#) [SS3003CH-TL-E](#) [GA01SHT18](#) [CRS10I30A\(TE85L,QM](#)  
[MA4E2501L-1290](#) [MBRA140TRPBF](#) [MBRB30H30CT-1G](#) [BAT 15-04R E6152](#) [JANTX1N5712-1](#) [DMJ3940-000](#) [SB007-03C-TB-E](#)  
[SK33B-TP](#) [NRVBB20100CTT4G](#) [NRVBM120LT1G](#) [NTSB30U100CT-1G](#) [VS-6CWQ10FNHM3](#) [CRG04\(T5L,TEMQ\)](#) [ACDBA1100LR-HF](#)  
[ACDBA1200-HF](#) [ACDBA240-HF](#) [ACDBA3100-HF](#) [CDBQC0530L-HF](#) [CDBQC0240LR-HF](#) [ACDBA260LR-HF](#) [ACDBA1100-HF](#)  
[MA4E2502L-1246](#) [10BQ015-M3/5BT](#) [NRVBM120ET1G](#) [CRS08TE85LQM](#) [PMAD1108-LF](#) [B120Q-13-F](#) [1N5819T-G](#) [B0530WSQ-7-F](#)  
[PDS1040Q-13](#) [B160BQ-13-F](#) [SDM05U20CSP-7](#) [B140S1F-7](#) [HSM560Je3/TR13](#)