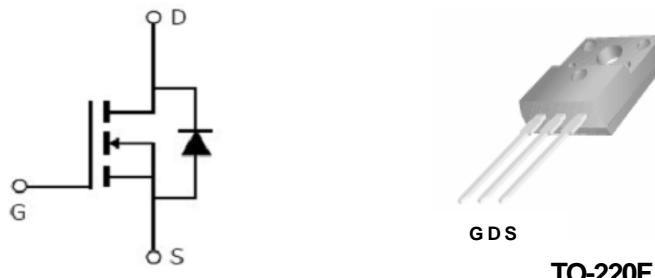


**Features**

- $R_{DS(on)}$  (Typical 4.9Ω)@ $V_{GS}=30V$
- Improved dv/dt Capability, High Ruggedness
- 100% Avalanche Tested
- Maximum Junction Temperature Range (150°C)

**Absolute Maximum Ratings**

Stresses exceeding Maximum Ratings may damage the device. Maximum Ratings are stress ratings only. Functional operation above the Recommended Operating Conditions is not implied. Extended exposure to stresses above the Recommended Operating Conditions may affect device reliability.

Symbol	Parameter	Rating	Unit
<b>Common Ratings (<math>T_J=25^{\circ}\text{C}</math> Unless Otherwise Noted)</b>			
$V_{GS}$	Gate-Source Voltage	$\pm 30$	V
$V_{(BR)DSS}$	Drain-Source Breakdown Voltage	650	V
$T_J$	Maximum Junction Temperature	-50 to 150	°C
$T_{STG}$	Storage Temperature Range	-50 to 150	°C
$I_s$	Diode Continuous Forward Current	2	A

**Mounted on Large Heat Sink ( $T_J=25^{\circ}\text{C}$  Unless Otherwise Noted)**

$I_{DM}$	Pulse Drain Current Tested (Silicon Limit) (Note1)	8	A	
$I_D$	Continuous Drain current@ $V_{GS}=10V$	$T_c = 25^{\circ}\text{C}$	2	A
$P_D$	Maximum Power Dissipation	39	W	
$E_{AS}$	Sing Pulsed Avalanche Energy (Note2)	20	mJ	
$R_{\theta JC}$	Thermal Resistance Junction-to-Case	3.2	°C/W	
$R_{\theta JA}$	Thermal Resistance Junction-to-Ambient	65	°C/W	

Note :

1. Repetitive Rating:Pulse width limited by maximum junction temperature.
2.  $IL=15.7\text{mH}, IAS=7 \text{ A}, VDD=50V, RG=25\Omega, Tj=25^{\circ}\text{C}$







Symbol	Parameter	Condition	Min.	Typ.	Max.	Unit
<b>Static Electrical Characteristics @ <math>T_J = 25^\circ\text{C}</math> (unless otherwise stated)</b>						
$V_{(\text{BR})\text{DSS}}$	Drain-Source Breakdown Voltage	$V_{GS}=0\text{V}$ $I_D=250\mu\text{A}$	650	--	--	V
$I_{DSS}$	Zero Gate Voltage Drain current( $T_c=25^\circ\text{C}$ )	$V_{DS}=600\text{V}$ , $V_{GS}=0\text{V}$	--	--	1	$\mu\text{A}$
$I_{GSS}$	Gate-Body Leakage Current	$V_{GS}=\pm 30\text{V}$ , $V_{DS}=0\text{V}$	--	--	$\pm 100$	nA
$V_{GS(\text{TH})}$	Gate Threshold Voltage	$V_{DS}=V_{GS}$ , $I_D=250\mu\text{A}$	2	3	4	V
$R_{DS(\text{ON})}$	Drain-Source On-State Resistance note A	$V_{GS}=10\text{V}$ , $I_D=1\text{A}$	--	4.9	6	$\Omega$
<b>Dynamic Electrical Characteristics @ <math>T_J = 25^\circ\text{C}</math> (unless otherwise stated)</b> note B						
$C_{iss}$	Input Capacitance	$V_{DS}=25\text{V}$ , $V_{GS}=0\text{V}$ , $f=1\text{MHz}$	--	350	--	pF
$C_{oss}$	Output Capacitance		--	30	--	pF
$C_{rss}$	Reverse Transfer Capacitance		--	1.5	--	pF
$Q_g$	Total Gate Charge	$V_{DS}=480\text{V}$ , $I_D=2\text{A}$ $V_{GS}=10\text{V}$	--	6.6	--	nC
$Q_{gs}$	Gate-Source Charge		--	1.5	--	nC
$Q_{gd}$	Gate-Drain Charge		--	1.4	--	nC
<b>Switching Characteristics</b> note B						
$t_{d(on)}$	Turn-on Delay Time	$V_{DS}=300\text{V}$ $I_D=2\text{A}$ , $R_G=25\Omega$ $V_{GS}=10\text{V}$	--	14.5	--	nS
$t_r$	Turn-on Rise Time		--	10	--	nS
$t_{d(off)}$	Turn-Off Delay Time		--	28	--	nS
$t_f$	Turn-Off Fall Time		--	13	--	nS
<b>Source- Drain Diode Characteristics@ <math>T_J = 25^\circ\text{C}</math> (unless otherwise stated)</b>						
$V_{SD}$	Forward on voltage	$I_S=2\text{A}$ , $V_{GS}=0\text{V}$	--	0.85	1.4	V

Note:

A: Pulse Test: pulse width  $\leq 300$  us, duty cycle  $\leq 2\%$ 

B: Guranteed by design, not subject to production testing.






Typical characteristic curve:

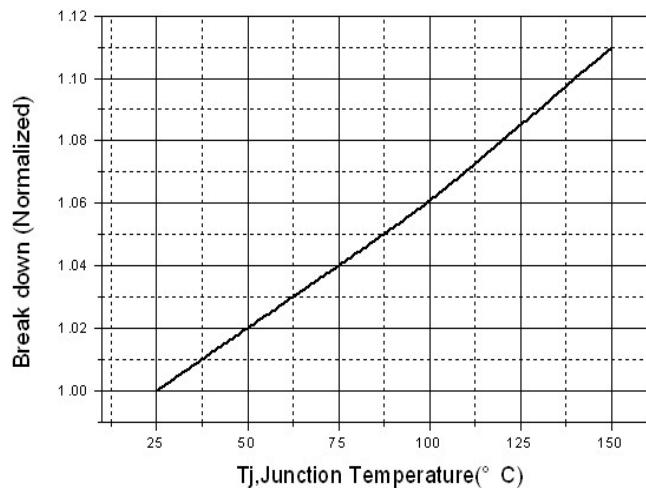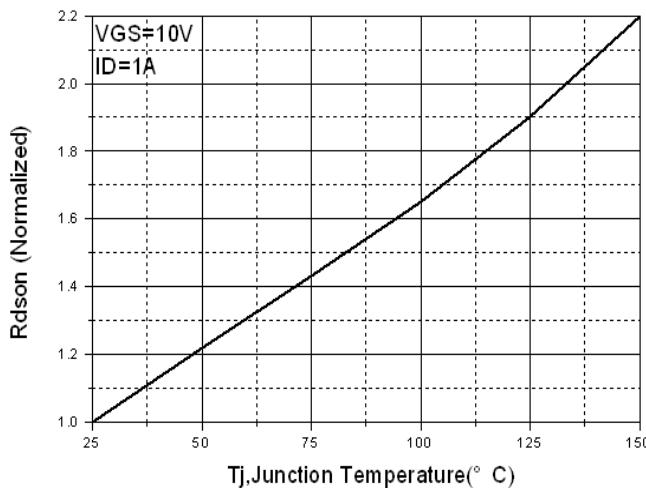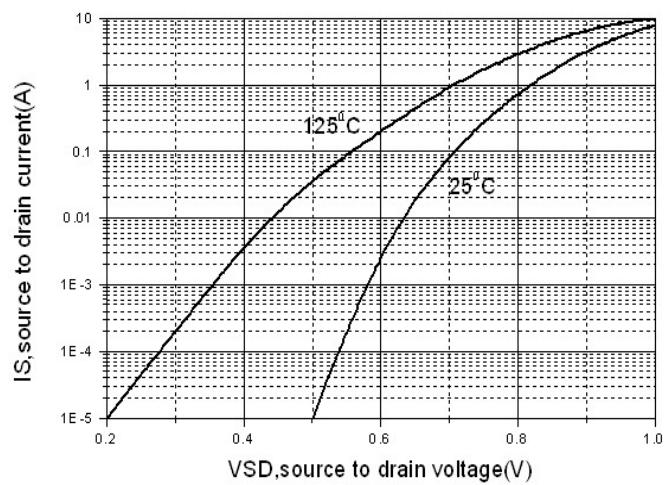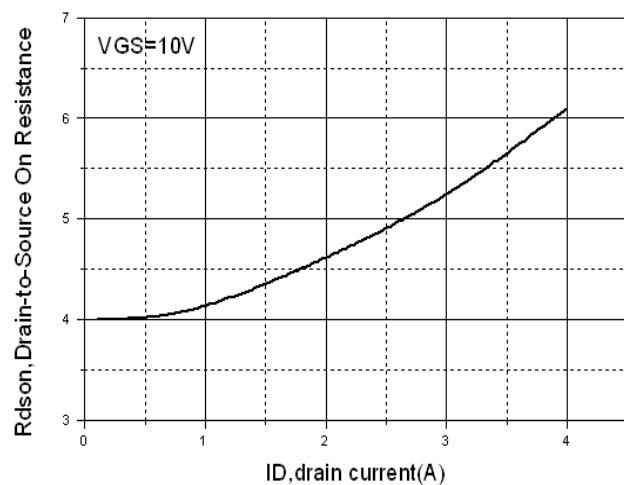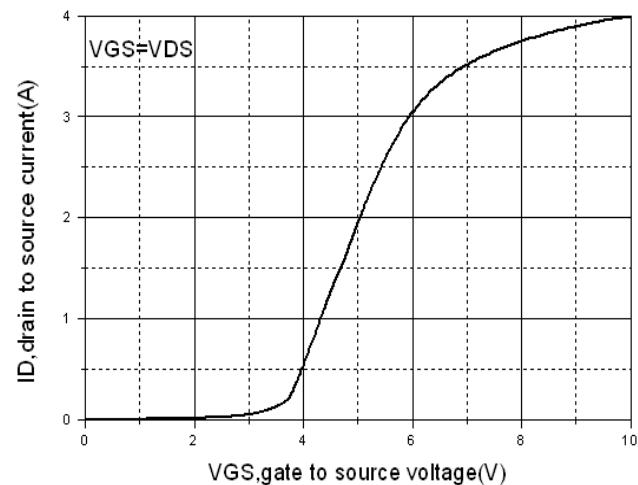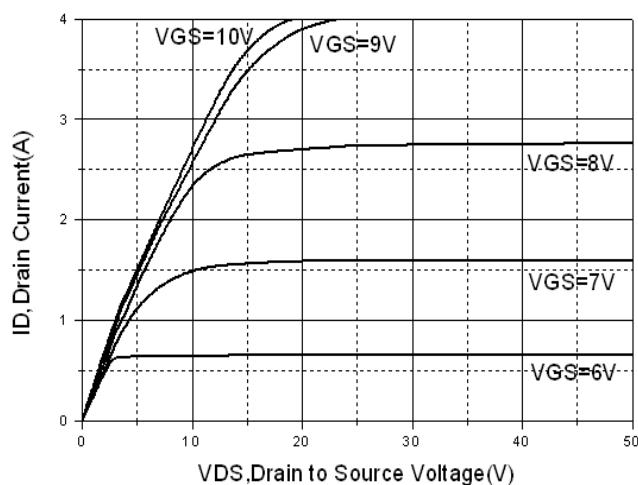

**PTF2N65**



650V/2A N-Channel Advanced Power MOSFET

**PUOLOP 迪浦**

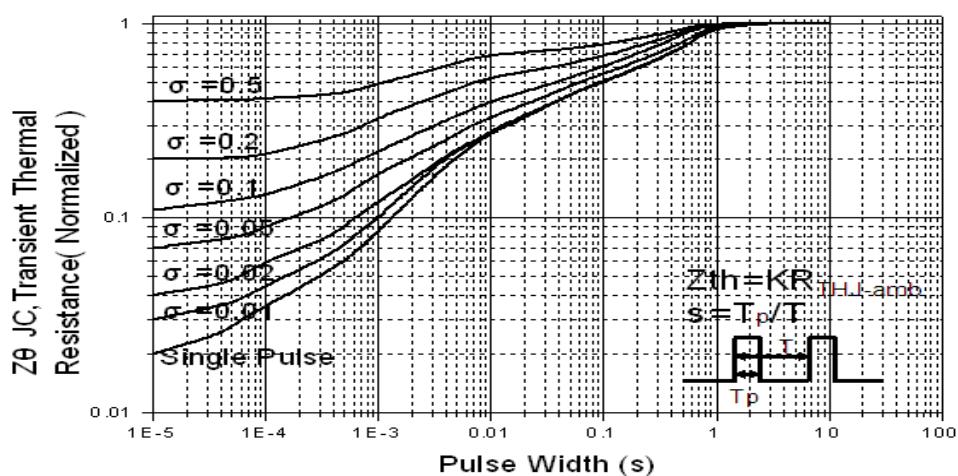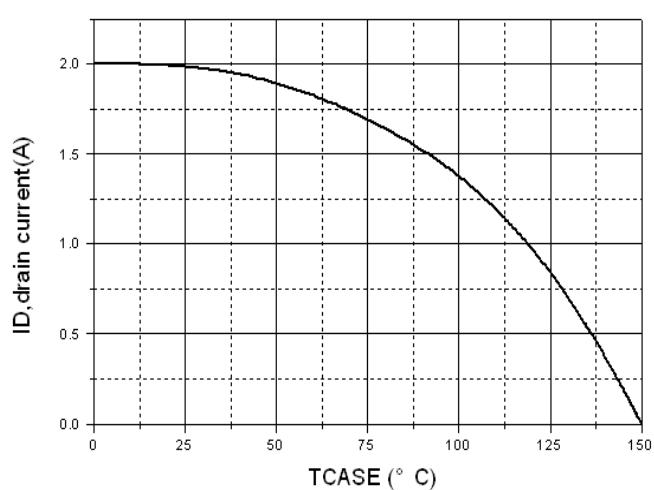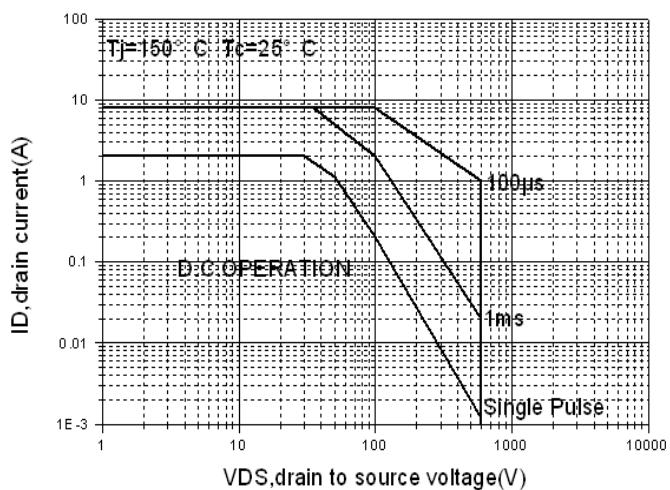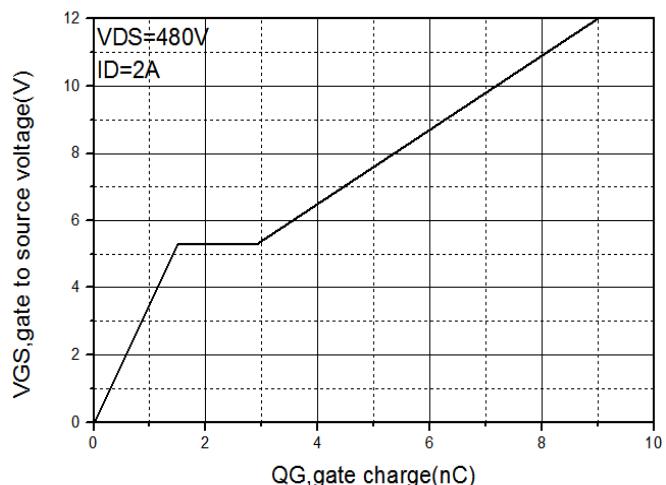
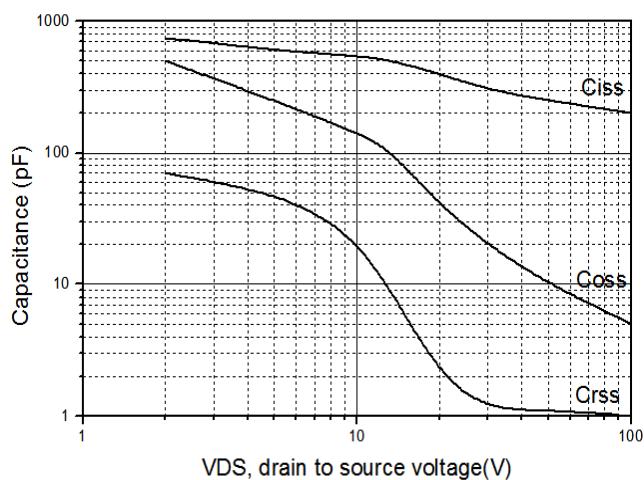


## Test Circuit and Waveform



Gate Charge Test Circuit and Waveform

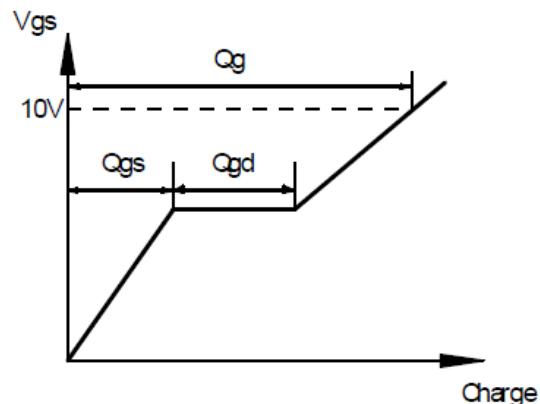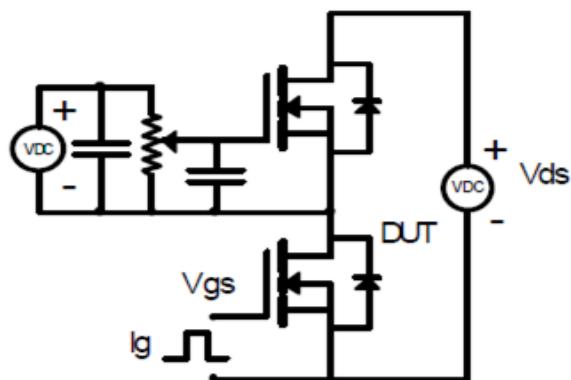



Switching time test circuit and waveform

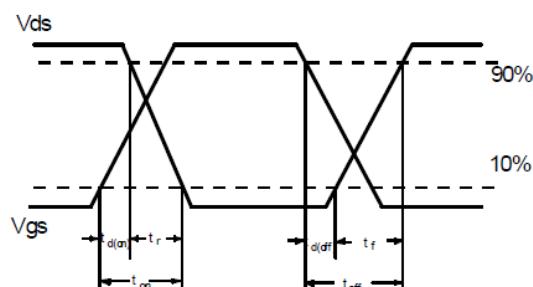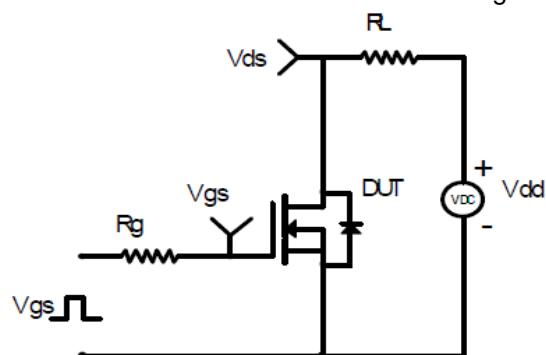

Reverse Recovery Test Circuit and Waveform

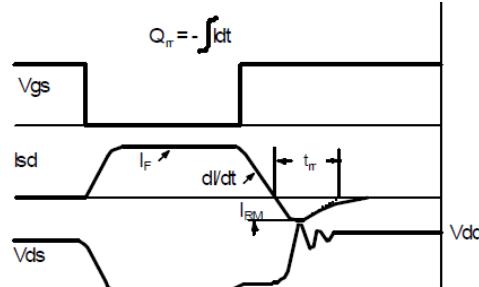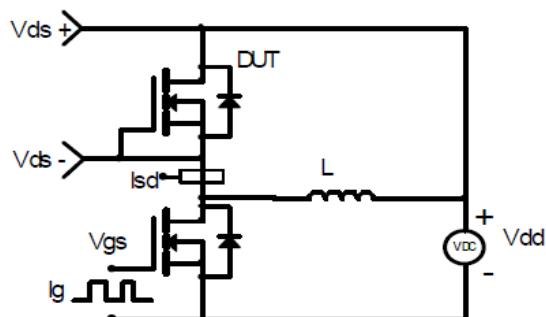

Avalanche Test Circuit and Waveform

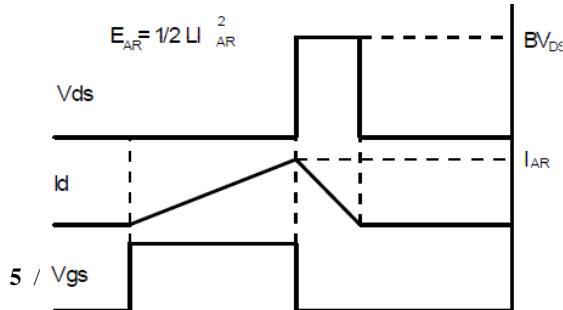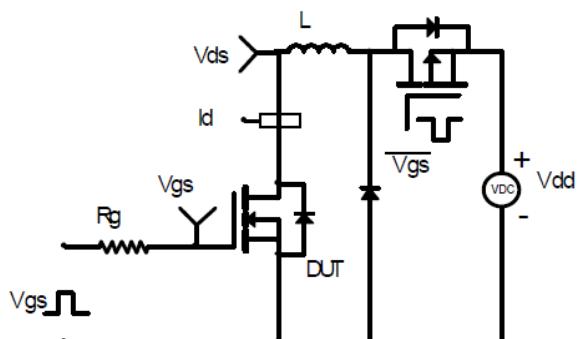

# X-ON Electronics

Largest Supplier of Electrical and Electronic Components

***Click to view similar products for MOSFET category:***

***Click to view products by PUOLOP manufacturer:***

Other Similar products are found below :

[614233C](#) [648584F](#) [MCH3443-TL-E](#) [MCH6422-TL-E](#) [FDPF9N50NZ](#) [FW216A-TL-2W](#) [FW231A-TL-E](#) [APT5010JVR](#) [NTNS3A92PZT5G](#)  
[IRF100S201](#) [JANTX2N5237](#) [2SK2464-TL-E](#) [2SK3818-DL-E](#) [FCA20N60\\_F109](#) [FDZ595PZ](#) [STD6600NT4G](#) [FSS804-TL-E](#) [2SJ277-DL-E](#)  
[2SK1691-DL-E](#) [2SK2545\(Q,T\)](#) [D2294UK](#) [405094E](#) [423220D](#) [MCH6646-TL-E](#) [TPCC8103,L1Q\(CM](#) [367-8430-0972-503](#) [VN1206L](#)  
[424134F](#) [026935X](#) [051075F](#) [SBVS138LT1G](#) [614234A](#) [715780A](#) [NTNS3166NZT5G](#) [751625C](#) [873612G](#) [IRF7380TRHR](#)  
[IPS70R2K0CEAKMA1](#) [RJK60S3DPP-E0#T2](#) [RJK60S5DPK-M0#T0](#) [APT5010JVFR](#) [APT12031JFLL](#) [APT12040JVR](#) [DMN3404LQ-7](#)  
[NTE6400](#) [JANTX2N6796U](#) [JANTX2N6784U](#) [JANTXV2N5416U4](#) [SQM110N05-06L-GE3](#) [SIHF35N60E-GE3](#)