

Clear and Strong Signal Light Emitted through the Colored Diffusion Lens




Common Specifications(QTG50/ QTG60/ QTG70)

- Modular steady/flashing type signal tower lights
- Excellent visibility from a distance with the use of a special color diffusing lens
- Can select from size selections of Ø50mm, Ø60mm, and Ø70mm to fit your sophisticated application needs
- The addition of modules and change in color arrangement can be achieved without the use of tools by using the Lock-type structure
- QTGA type offers a nifty integrated lens and cover for a simple aesthetically pleasing product
- A variety of mounting bracket selections for the pole mount type to fit your location and mounting needs
- Buzzer sound output : Sound volume of Max 85dB at 1m
- Available in 2 customized options; sounds buzzer type and high volume(105dB) buzzer type
- Can be used with NPN open collector transistor driven input, which allows direct connection to a PLC
- Flashing rate : 60-80 flashes/min
- Materials : Lens-PC, Housing-ABS, Pole-Al
- Ambient operating temperature : -30°C to +50°C
- Protection rating : Standard type-IP65, Built-in buzzer type-IP54
- Certificates : CE Compliant, UL Listed
- Compliant with RoHS directive



• Each modular color lens can be added without additional tools

QTG model uses a special contact structure for stable operation, the lens modules lock into place by rotating the modular structures together. This allows for easy changes to the color arrangement without any tools. Additional modules can be added.



• **Buzzer volume is adjusted via the volume control lever**
 QTG type volume can be adjusted for each specific working condition with the equipped buzzer volume control lever at the bottom of the product.(-BZ type)

1 High volume buzzer (105dB) option can be fitted to the top of the product. (Customization)

High volume 105dB volume buzzer module fastened to the top of the product provides 360 degree buzzer signal output which cannot be achieved with the single directional buzzer.(Buzzer volume cannot be adjusted)

2 Integrated cover and lens model (QTGA50/ QTGA60/ QTGA70)

QTGA50/ QTGA60/ QTGA70 The sleek lens cover model is made of one piece for a simple unified look.

3 Black body option available

Products can be configured with the black body and cover option. In addition, the buzzer option is also available in a black color body and buzzer.

4 Can select from a variety of mounting brackets option to fit your application needs and build environment

There are a variety of mounting brackets options available depending on cost and installation requirements.



Warning/
Signal/
Stackable



Signal &
Electric Horn/
Speakers



Vessels and
Heavy-Duty
Equipment



Explosion
Proof



Warning
Light Bar



Aviation
Obstruction
Lights



Signal Tower
Lights



USB/ETN
Signal Tower
Lights



Wireless
Network
System




Electric Horn/
Speakers




Industrial
LED Lights

QTG50ML

Ø50mm LED Steady/Flashing Tower Lights

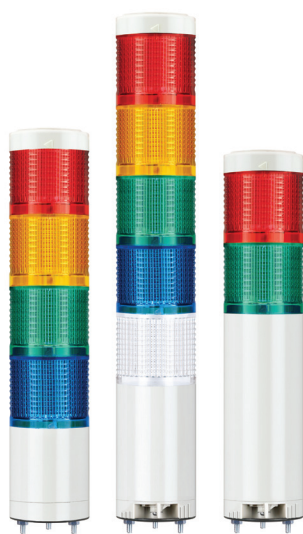


QTG50ML series

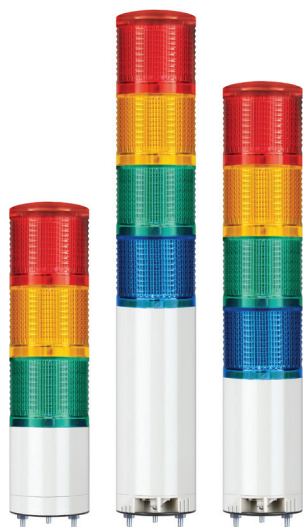

QTGA50ML series

• Customization

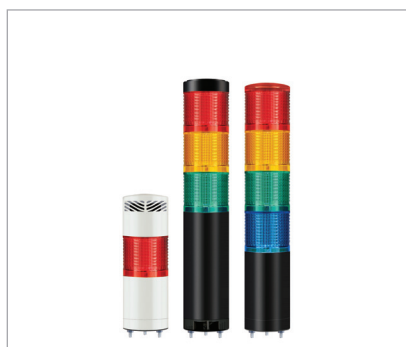

- High buzzer module equipped on top/ Black housing tower lights.

QTG50ML Ø50mm Direct Mount, LED Steady/Flashing Type

Model number	Layer	Voltage	Current	Certificates	Weight	Color
QTG50ML Steady	1	AC/DC12V	0.080A	DC24V only DC24V only	0.19kg	• R-Red
QTG50ML-BZ Steady /w built-in buzzer		AC/DC24V	0.045A		0.19kg	
QTG50MLF Steady/Flashing	2	AC/DC12V	0.160A		0.27kg	• R-Red • G-Green
QTG50MLF-BZ Steady/Flashing /w built-in buzzer		AC/DC24V	0.090A			
QTGA50ML Steady	3	AC/DC12V	0.240A		0.36kg	• R-Red • A-Amber • G-Green
QTGA50ML-BZ Steady /w built-in buzzer		AC/DC24V	0.135A			
QTGA50MLF Steady/Flashing	4	AC/DC12V	0.320A		0.44kg	• R-Red • A-Amber • G-Green • B-Blue
QTGA50MLF-BZ Steady/Flashing /w built-in buzzer		AC/DC24V	0.180A			
QTGA50MLF Steady/Flashing /w built-in buzzer	5	AC/DC12V	0.400A		0.53kg	• R-Red • A-Amber • G-Green • B-Blue • W-White
		AC/DC24V	0.225A		0.63kg	

※ AC type model has a free-voltage range of 100V-240V.

Signal/ Audible Line Current(per each layer)

Voltage	AC/DC12V	AC/DC24V	AC110V-220V
Signal line current	0.080A	0.045A	Max 0.045A
Audible line current	0.016A	0.031A	Max 0.030A

Wiring Instructions

- External power line standard : UL1015 AWG18(0.75sq)×2C 400mm
 - Signal line standard : UL1007 AWG22(0.3sq) 400mm
 - LED tower light can be wiring with external contact and transistor
- ※ Please refer to page 331-332 for detailed wiring instructions.

Customization

- High buzzer module equipped on top(Lens should be within 4 layers)
- Black housing tower lights
- 2 buzzer sound types : Both prolonged (beep, beep) and staccato (beep, beep, beep) buzzer output available
- Wall mount bracket options : Bracket structure allows for threading through the bracket hole or into the wall mount




Ordering Specification


QTG50ML	-	3	-	110/220	-	RAG
[Model number]		[Layer]		[Voltage]		[Color]
<ul style="list-style-type: none"> • QTG50ML • QTG50ML-BZ • QTG50MLF • QTG50MLF-BZ • QTGA50ML • QTGA50ML-BZ • QTGA50MLF • QTGA50MLF-BZ 		<ul style="list-style-type: none"> • 1-1Layer • 2-2Layers • 3-3Layers • 4-4Layers • 5-5Layers 		<ul style="list-style-type: none"> • 12-DC12V • 24-DC24V • 110/220 -AC110V-220V 		<ul style="list-style-type: none"> • R-Red • A-Amber • G-Green • B-Blue • W-White

QTG50L

Ø50mm LED Steady/Flashing Tower Lights

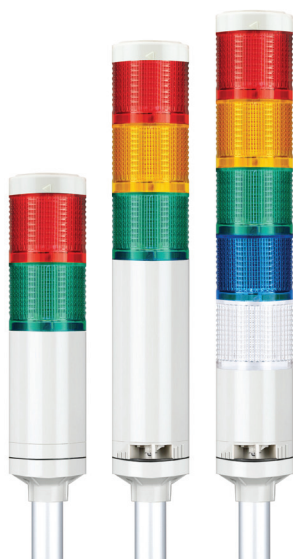

QTG50L series

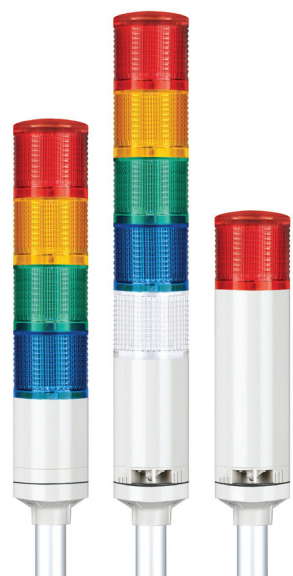

QTGA50L series

• Customization



- High buzzer module equipped on top/ Black housing tower lights.

QTG50L Ø50mm Pole Mount, LED Steady/Flashing Type

Model number	Layer	Voltage	Current	Certificates	Weight	Color		
QTG50L Steady	1	AC/DC12V	0.080A	CE DC24V only UL DC24V only	0.34kg	• R-Red		
QTG50L-BZ Steady /w built-in buzzer		AC/DC24V	0.045A		0.34kg			
QTG50LF Steady/Flashing		AC110V-220V	Max 0.045A		0.44kg			
QTG50LF-BZ Steady/Flashing /w built-in buzzer	2	AC/DC12V	0.160A		CE DC24V only UL DC24V only	0.43kg	• R-Red • G-Green	
QTGA50L Steady		AC/DC24V	0.090A			0.43kg		
QTGA50L-BZ Steady /w built-in buzzer	AC110V-220V	Max 0.065A	0.53kg					
QTGA50LF Steady/Flashing	3	AC/DC12V	0.240A			CE DC24V only UL DC24V only	0.51kg	• R-Red • A-Amber • G-Green
QTGA50LF-BZ Steady/Flashing /w built-in buzzer		AC/DC24V	0.135A				0.51kg	
QTGA50L Steady		AC110V-220V	Max 0.080A				0.61kg	
QTGA50L-BZ Steady /w built-in buzzer	4	AC/DC12V	0.320A				CE DC24V only UL DC24V only	0.60kg
QTGA50LF Steady/Flashing		AC/DC24V	0.180A	0.60kg				
QTGA50LF-BZ Steady/Flashing /w built-in buzzer	AC110V-220V	Max 0.100A	0.70kg					
QTGA50L Steady	5	AC/DC12V	0.400A	CE DC24V only UL DC24V only				0.68kg
QTGA50L-BZ Steady /w built-in buzzer		AC/DC24V	0.225A		0.68kg			
QTGA50LF Steady/Flashing /w built-in buzzer		AC110V-220V	Max 0.120A		0.78kg			

※ AC type model has a free-voltage range of 100V-240V.

Wiring Instructions

- External power line standard : UL1015 AWG18(0.75sq)×2C 400mm
- Signal line standard : UL1007 AWG22(0.3sq) 400mm
- LED tower light can be wiring with external contact and transistor
- ※ Please refer to page 331-332 for detailed wiring instructions.

Mounting Bracket

Standard	LB18	LW18	QZ18	SZ18	QL18	SL18	QLA18
Steel	Steel	PC	PC	Al	PC	Al	PC

※ Please refer to page 34-39 for detailed dimensions.

Customization

- 2 buzzer sound types : Both prolonged (beep, beep) and staccato (beep, beep, beep) buzzer output available
- Customized pole length available
- High buzzer module equipped on top(Lens should be within 4 layers)
- Black housing tower lights

Ordering Specification

QTG50L	-	3	-	110/220	-	RAG	-	LW18
[Model number]		[Layer]		[Voltage]		[Color]		[Mounting bracket]
• QTG50L		• 1-1Layer		• 12-DC12V		• R-Red		• None
• QTG50L-BZ		• 2-2Layers		• 24-DC24V		• A-Amber		• -Standard
• QTG50LF		• 3-3Layers		• 110/220		• G-Green		• Bracket
• QTG50LF-BZ		• 4-4Layers		• -AC110V-220V		• B-Blue		• -LB18 -LW18
• QTGA50L		• 5-5Layers				• W-White		• -QZ18 -SZ18
• QTGA50L-BZ								• -QL18 -SL18
• QTGA50LF								• -QLA18
• QTGA50LF-BZ								



Warning/
Signal/
Stackable



Signal &
Electric Horn/
Speakers



Vessels and
Heavy-Duty
Equipment



Explosion
Proof



Warning
Light Bar




Aviation
Obstruction
Lights



Signal Tower
Lights



USB/ETN
Signal Tower
Lights



Wireless
Network
System



Electric Horn/
Speakers



Industrial
LED Lights

QTG series

LED Steady/Flashing Tower Lights



Technical Diagram

(Units : mm)

QTG50ML : DC
QTG50MLF : DC
QTG50ML-BZ : DC



QTG50ML : AC
QTG50MLF-BZ : DC

QTG50MLF : AC
QTG50ML-BZ : AC
QTG50MLF-BZ : AC

QTG50L : DC
QTG50LF : DC
QTG50L-BZ : DC

QTG50L : AC
QTG50LF-BZ : DC

QTG50LF : AC
QTG50L-BZ : AC
QTG50LF-BZ : AC

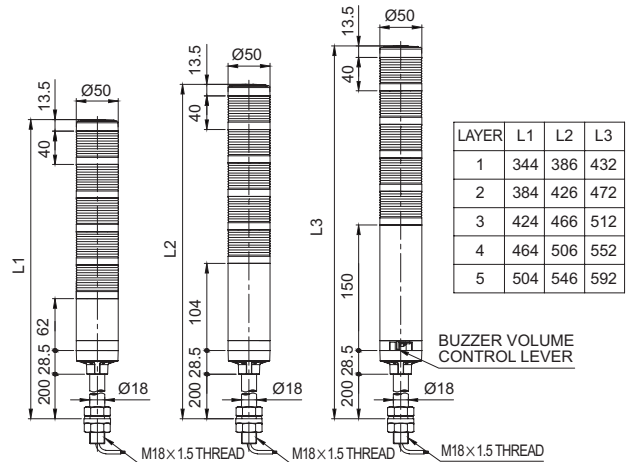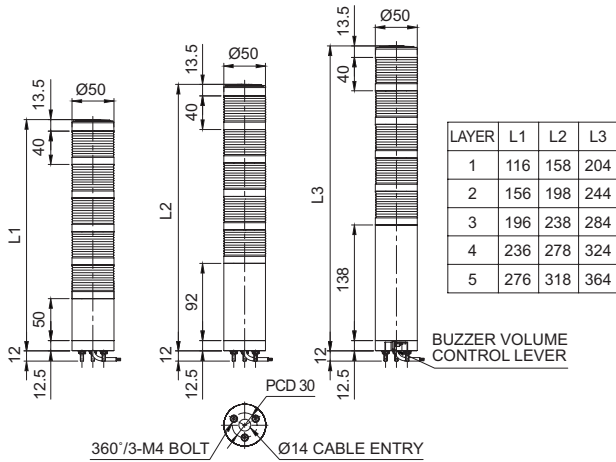

QTG60ML : DC
QTG60MLF : DC
QTG60ML-BZ : DC



QTG60ML : AC
QTG60MLF-BZ : DC

QTG60MLF : AC
QTG60ML-BZ : AC
QTG60MLF-BZ : AC

QTG60L : DC
QTG60LF : DC
QTG60L-BZ : DC

QTG60L : AC
QTG60LF-BZ : DC

QTG60LF : AC
QTG60L-BZ : AC
QTG60LF-BZ : AC

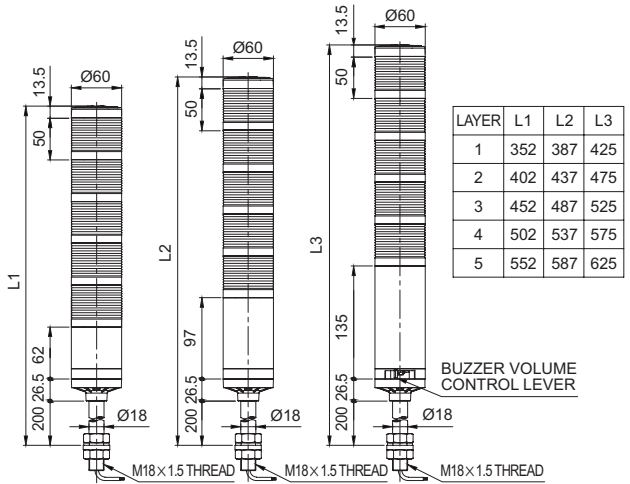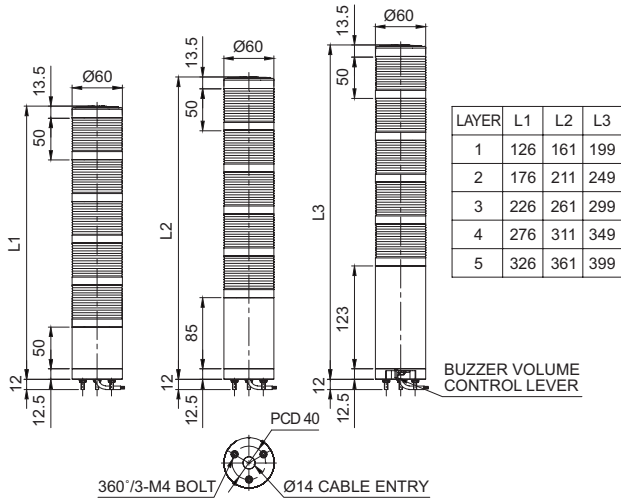

QTG70ML : DC
QTG70MLF : DC
QTG70ML-BZ : DC



QTG70ML : AC
QTG70MLF : AC
QTG70ML-BZ : AC
QTG70MLF-BZ : DC

QTG70MLF-BZ : AC

QTG70L : DC
QTG70LF : DC
QTG70L-BZ : DC

QTG70L : AC
QTG70LF : AC
QTG70L-BZ : AC
QTG70LF-BZ : DC

QTG70LF-BZ : AC

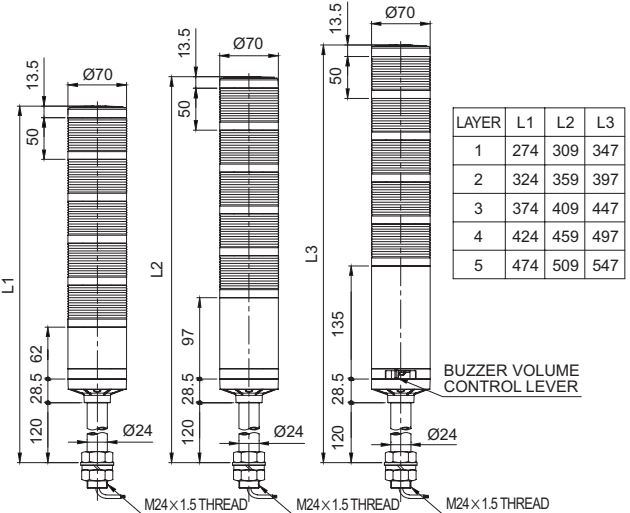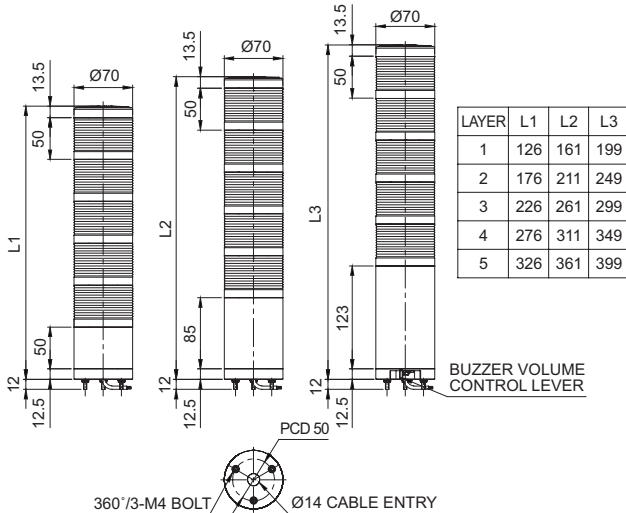

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Audio Indicators & Alerts](#) category:

Click to view products by [QLIGHT](#) manufacturer:

Other Similar products are found below :

[M2BJ-BH24E](#) [6-4](#) [68S1240-PA](#) [MBA-624](#) [F/BC 40P-DR LF](#) [FDG111PLF](#) [F/NRMB 24 BLACK LF](#) [PF-35N29WQ](#) [PFD-27A35PQ](#) [PL-27A35PSQ](#) [PS-531Q](#) [AB2020B-2-LW1](#) [EBPT-401](#) [PB06SD12AP](#) [PB-1220PEQ](#) [S6109](#) [SC2036ACP](#) [SC616N-2](#) [SC628FW](#) [SC628MPG](#) [SC648D](#) [SCS045MD9DT3S](#) [AB2025B-LW50-R](#) [ESZ-25B-5-250B](#) [F/BC 35-DR LF](#) [FCM12PLF](#) [F/EB20P-DR LF](#) [F/HU110MP24V-IP67B](#) [LF](#) [AI-2835-TF-LW150-2-R](#) [AI-4228-TF-LW305-R](#) [FSMD8585JSLF](#) [FSS-26T](#) [F/SU 21-02 LF](#) [F/TCW 05 WITH LABEL LF](#) [F/UCW 03 WITH LABEL LF](#) [F/UCW 06 WITH LABEL LF](#) [PKM22EPPH40S1-B0](#) [PKM35-4A0](#) [PL-35N29WQ](#) [PLD-27A35PQ](#) [PS-552Q](#) [CM-5](#) [M2BJ-BH24E-D](#) [REF-202](#) [LSC628ANR](#) [5-100](#) [PAL-328](#) [03-810.001](#) [RTO-1R07-001](#) [PL-21N31PQ](#) [PF-27A25PSQ](#)