



Qoltec Monolith DC-DC charger for LiFePO4 AGM 12V batteries | 20A | 250W

Product code: 52479


The intelligent DC-DC charger from the Monolith series is a guarantee of correct and stable charging of 12V batteries from the starter battery thanks to its 3-stage charging function. Compatible with LiFePO4, AGM, FLD, SLA, Gel. It has a number of safety features designed to protect the charger and the batteries connected to it.

COMPATIBLE WITH MANY TYPES OF BATTERIES



Our Monolith charger designed to work without trouble with a wide range of different types of batteries including AGM, GEL, calcium, SLA, Li-ion, EFB and LiFePO4 providing them with a stable and safe power source. Ideal for use in 4-wheel drive vehicles, i.e. caravans and campers, trucks, other commercial vehicles, but will also be a good choice for boat and yacht owners.

INTELLIGENT 3-STAGE CHARGING

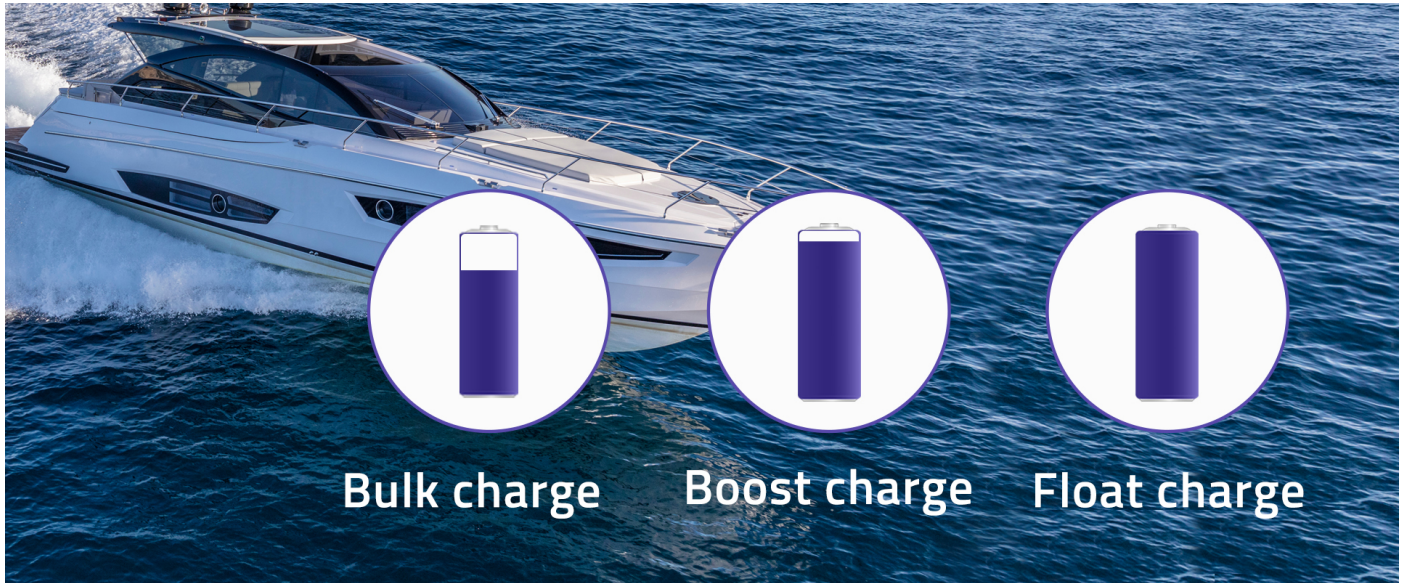

The Monolith DC-DC charger will charge your starter battery using intelligent 3-stage charging consisting of :

The BULK stage is the identification of the battery and its needs, charging up to 80% with a constant current, high voltage,

The BOOST stage is the so-called absorption charging, it maintains the charging voltage between 14.1VDC and 14.8VDC, reducing the input current,

The FLOAT stage is the last charging cycle in which the battery has already reached 95% of its capacity and gradually reaches 100%, there is a reduction in the charging voltage to a constant value between 13.0VDC and 13.8 VDC, the charging current automatically drops to 0A when the battery is charged.

HOW TO CONNECT THE BATTERY CORRECTLY?



To charge our battery, we need to correctly connect the D+ ignition cable to the DC-DC charger from the D+ input to the 12V source and select the correct battery type using the 5D button, which is located on the side of the charger. Once the correct battery type has been selected, the charger is ready to go. All we need to do is to start our starter battery, which is activated while driving. As soon as the 12V signal is received, the unit will switch on, the power indicator will light up green and the battery will start charging. We recommend using 18-16AWG copper cable.

SAFETY IS OUR PRIORITY



In designing the DC-DC chargers, we placed safety above all else, which is why the product is equipped with comprehensive protection features, including reverse polarity, overvoltage and overheating protection.

UVP protection - protects against under-voltage at the output,

SCP protection - is a short circuit protection,

OVP protection - it protects against too high output voltage,

OCP protection - is a protection against too high current on the line,

OTP protection - is protection against overheating.

Starter battery protection - the starter battery is **protected against over-discharge** with a D+ ignition cable (cable not included).

Home battery protection - to further strengthen the home battery's , it is possible to connect an LC cable (18-16AWG) that can automatically regulate the charging current (cable not included).

CONFIDENCE CONFIRMED BY A WARRANTY



Do you care about the high quality of the product you are buying? Our solutions will meet your expectations. The chargers we offer come with a 24-month guarantee from the date of purchase.

TECHNICAL DATA

Producer	Qoltec
Type of charging	DC-DC
Power	250W
Input voltage	12VDC
Output voltage	12VDC
Output current	20A
Efficiency	90%
Connector	M6 x 10mm
Application	LiFePO4 EFB SLA GEL AGM Li-ion Calcium
Cooling system	2 x fan
Protection	UVP - protects against under-voltage at the output, SCP - is short-circuit protection, OVP - is protection against excessively high output voltage, OTP - is protection against overheating. Reverse polarity protection
Protection against inverse polarity	Yes
Operating temperature	-20°C ~ +50°C
Additional information	We recommend using 18-16AWG copper D+ cable (cable not included)
Attention	Only 12V batteries should be used. Damage caused by connecting batteries with higher voltages will not be covered by the warranty. Cables are not included in the kit.
Dimensions (D/L x W x H)	179 x 210 x 70 mm
Package	Box
Package contents	1 x DC-DC charger 1 x User manual
Package depth / length [mm]	220
Package width [mm]	260
Package height [mm]	110
Net weight [kg]	1.439
Gross weight [kg]	1.728
Certificate	CE
Warranty	24 month
EAN code	5901878524795

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Adapters category](#):

Click to view products by [QOLTEC manufacturer](#):

Other Similar products are found below :

[52481](#) [B631-2B1](#) [XTAR LC4 AA/AAA 1,5V LI-ION](#) [52480](#) [51959](#) [52479](#) [MC2-C](#) [AL800](#) [51956](#) [XTAR LC8 AA/AAA 1,5V LI-ION](#) [SC1-C](#) [51955](#) [51957](#) [MC1-C](#) [MINI CHARGER + 2XAAA 800MAH](#) [POLOLU MICROSD ADAPTER](#) [GROVE CAPE FOR BEAGLEBONE](#) [GROVE BREAKOUT FOR LINKIT SMART 7688 DUO](#) [RBFN-EU-SEN-BMT-12](#) [9546](#) [9755](#) [9983](#) [OKY3380](#) [I2C HUB](#) [DUAL](#) [MAX14870 MOTOR DRIVER SHIELD](#) [6PRO122420](#) [AB-12.100/ST8VA](#) [AL 300 PRO 2V/6V/12V](#) [BC4](#) [BQ-CC65](#) [CABLE-1/CL](#) [CABLE-2/CL](#) [CABLE-3/CL](#) [CL16.8VDC-5A -AS](#) [CL8.4VDC-5A](#) [EP12M248L](#) [EPA1020-075](#) [EPA1206PRO](#) [FC2](#) [GM3A](#) [GP 2XP861 + 8X2100](#) [RECYKO DOK](#) [GP ECO B421 + 4XAA RECYKO 2100 + D451](#) [GP ECO E211 + 2XAA RECYKO 2100](#) [GP ECO M451 + 4XAA RECYKO 2700](#) [LIFEPO4-25.6V-4A](#) [LIFEPO4-38.4-5A](#) [LI-ION-11.1V-5A](#) [LI-ION-14.8V-5A](#) [LI-ION-14.8V-8A](#) [LI-ION-25.9V-2A](#)