



Data Sheet

Typical Performance

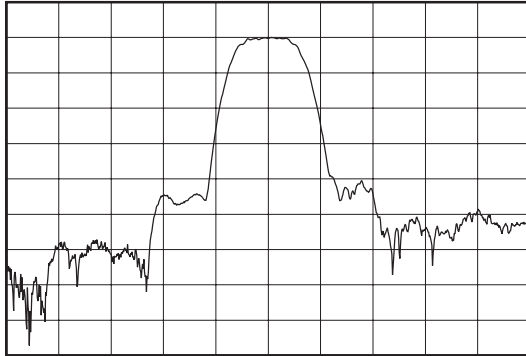

Horizontal: 3 MHz/Div  
Vertical: 10 dB/Div

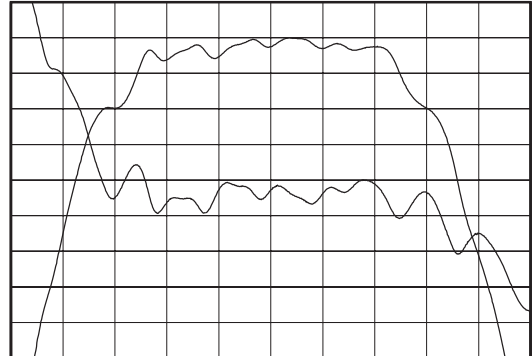



Horizontal: 500 kHz/Div  
Vertical: 1 dB/Div  
Vertical: 4 deg/Div

Specifications

Parameter	Unit	Minimum	Typical	Maximum
Center Frequency	MHz	69.85	70	70.15
Insertion Loss at $F_o$	dB	-	6.95	7.5
1 dB Bandwidth	MHz	2.3	2.6	-
3 dB Bandwidth	MHz	3	3.5	-
35 dB Bandwidth	MHz	-	6.9	7.5
Passband Ripple	dB	-	0.65	1
Phase Linearity (70% of 3dB Bandwidth)	deg	-	3	5
Group Delay Variation (70% of 3dB Bandwidth)	nsec	-	115	175
Absolute Delay	$\mu$ sec	-	0.94	-
Substrate Material	-	-	YZ LiNbO <sub>3</sub>	-
Temperature Coefficient	ppm/ $^{\circ}$ C	-	-94	-
Ambient Temperature	$^{\circ}$ C	-	25	-

Package Outline

Matching Configuration

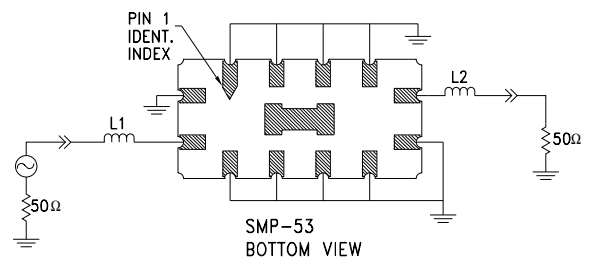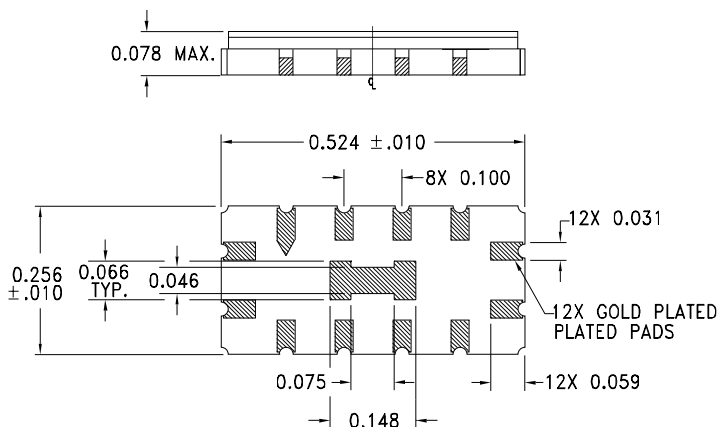

$L1 = 220\text{nH}$ ,  $L2 = 82\text{nH}$   
Nominal Source/Load Impedance =  $50\Omega$   
Package Style SMP-53

11/24/99

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Signal Conditioning](#) category:*

*Click to view products by [Qorvo](#) manufacturer:*

Other Similar products are found below :

[MAPDCC0001](#) [MAPDCC0004](#) [PD0409J5050S2HF](#) [880157](#) [HHS-109-PIN](#) [DC1417J5005AHF](#) [AFS14A30-2185.00-T3](#) [AFS14A35-1591.50-T3](#) [DS-323-PIN](#) [B39321R801H210](#) [1A0220-3](#) [JP510S](#) [LFB212G45SG8C341](#) [LFB322G45SN1A504](#) [LFL182G45TC3B746](#) [SF2159E](#) [30057](#) [FM-104-PIN](#) [CER0813B](#) [MAPDCC0005](#) [3A325](#) [40287](#) [41180](#) [ATB3225-75032NCT](#) [BD0810N50100AHF](#) [BD2425J50200AHF](#) [C5060J5003AHF](#) [JHS-115-PIN](#) [JP503AS](#) [DC0710J5005AHF](#) [DC2327J5005AHF](#) [DC3338J5005AHF](#) [43020](#) [LFB2H2G60BB1C106](#) [LFL15869MTC1B787](#) [X3C19F1-20S](#) [XC3500P-20S](#) [10013-20](#) [SF2194E](#) [CDBLB455KCAX39-B0](#) [TGL2208-SM, EVAL](#) [RF1353C](#) [1E1305-3](#) [1F1304-3S](#) [1G1304-30](#) [B0922J7575AHF](#) [2020-6622-20](#) [10017-3](#) [TP-103-PIN](#) [BD1222J50200AHF](#)