
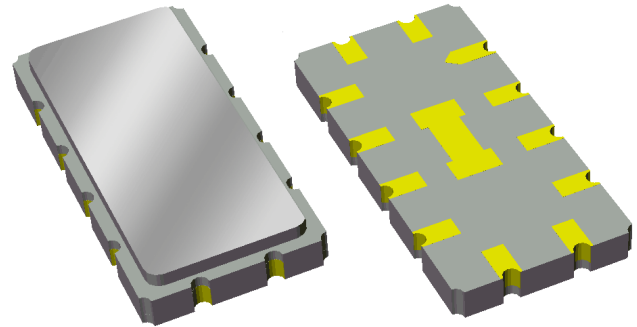



Features

- Usable bandwidth 6.0 MHz
- Typical 3dB bandwidth of 6.35 MHz
- Low loss
- High attenuation
- Single-ended operation
- Ceramic Surface Mount Package (SMP)
- Hermetic
- RoHS compliant (2002/95/EC), Pb-free 



Package


Surface Mount 13.30 x 6.50 x 1.75 mm
SMP-53

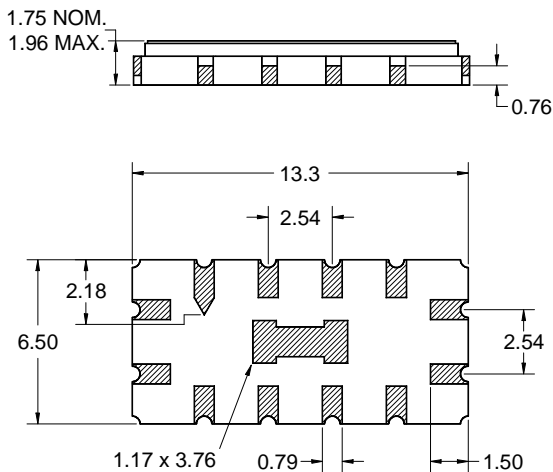

Pin Configuration

Bottom View

This package includes a center pad.
Soldering of the center pad to PCB is not recommended and not required.

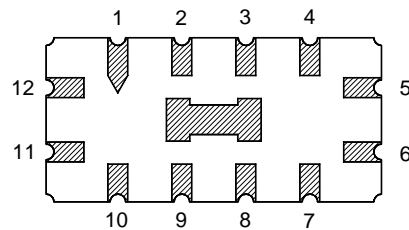

Single-ended Configuration

Pin No.	Description
5	Output
11	Input
6,12	Ground
1,2,3,4	Case Ground
7,8,9,10	Case Ground

Dimensions shown are nominal in millimeters
All tolerances are ± 0.15 mm except overall
length and width ± 0.10 mm

Body: Al_2O_3 ceramic
Lid: Kovar, Ni plated
Terminations: Au plating 0.5 - 1.0 μ m,
over a 2 - 6 μ m Ni plating

Electrical Specifications ⁽¹⁾

Operating Temperature Range: ⁽²⁾ +25 °C


Parameter ⁽³⁾	Minimum	Typical ⁽⁴⁾	Maximum	Unit
Center Frequency	69.8	70	70.2	MHz
Insertion Loss at Center Frequency	-	7.5	8.5	dB
1 dB Bandwidth	5.1	5.35	-	MHz
3 dB Bandwidth	6	6.35	-	MHz
40 dB Bandwidth	-	10.2	10.65	MHz
Passband Ripple 67.6 – 72.4 MHz	-	0.7	1.0	dB p-p
Phase Linearity 67.6 – 72.4 MHz	-	8.2	9.75	° p-p
Group Delay Variation 67.5 – 72.4 MHz	-	85	110	ns p-p
Absolute Delay	-	1.01	-	µsec
Temperature Coefficient	-	-94	-	ppm/°C
Source Impedance (single-ended) ⁽⁵⁾	-	50	-	Ω
Load Impedance (single-ended) ⁽⁵⁾	-	50	-	Ω

Notes:

1. All specifications are based on the TriQuint test circuit shown below
2. In production, devices will be tested at room temperature to a guardbanded specification to ensure electrical compliance over temperature
3. Electrical margin has been built into the design to account for the variations due to temperature drift and manufacturing tolerances
4. Typical values are based on average measurements at room temperature
5. This is the optimum impedance in order to achieve the performance shown

Test Circuit:

Actual matching values may vary due to PCB layout and parasitics

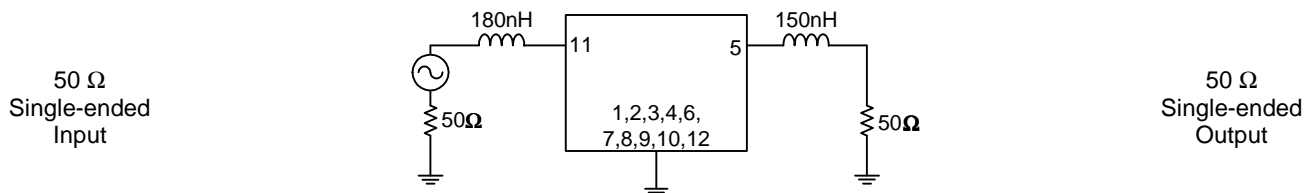

Electrical Specifications ⁽¹⁾

Operating Temperature Range: ⁽²⁾ -40 to +85 °C


Parameter ⁽³⁾	Minimum	Typical ⁽⁴⁾	Maximum	Unit
Center Frequency	-	70	-	MHz
Insertion Loss at 70 MHz	-	7.5	8.8	dB
Lower 1 dB Band Edge ⁽⁵⁾	-	66.98	68	MHz
Upper 1 dB Band Edge ⁽⁵⁾	72	72.59	-	MHz
Lower 3 dB Band Edge ⁽⁵⁾	-	66.64	67.5	MHz
Upper 3 dB Band Edge ⁽⁵⁾	72.5	73.09	-	MHz
Lower 40 dB Bandwidth ⁽⁵⁾	-	10.2	11.5	MHz
Passband Ripple ⁽⁶⁾ 67.6 – 72.4 MHz	-	0.7	1.2	dB p-p
Phase Linearity 67.6 – 72.4 MHz	-	8.2	12	° p-p
Group Delay Variation 67.5 – 72.4 MHz	-	85	150	ns p-p
Absolute Delay 67.5 – 72.4 MHz	-	1.01	-	µsec
Source Impedance (single-ended) ⁽⁷⁾	-	50	-	Ω
Load Impedance (single-ended) ⁽⁷⁾	-	50	-	Ω

Notes:







1. All specifications are based on the TriQuint test circuit shown below
2. In production, devices will be tested at room temperature to a guardbanded specification to ensure electrical compliance over temperature
3. Electrical margin has been built into the design to account for the variations due to temperature drift and manufacturing tolerances
4. Typical values are based on average measurements at room temperature
5. Relative to insertion loss at 70MHz
6. Passband Ripple is defined as the worst case peak to adjacent valley within the passband. The edge of the passband is the point where the amplitude begins a downward trend that does not reverse until the stopband
7. This is the optimum impedance in order to achieve the performance shown

Test Circuit:

Actual matching values may vary due to PCB layout and parasitics

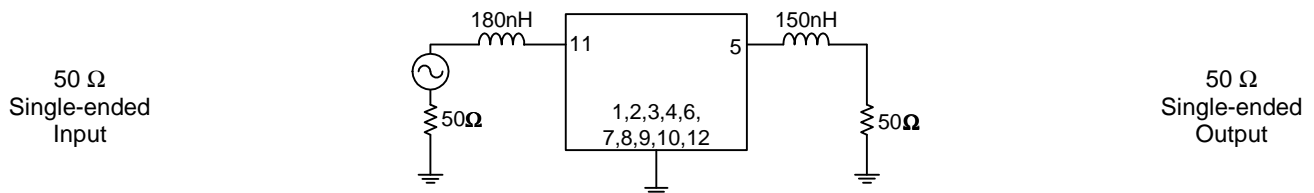

Typical Performance (at room temperature)

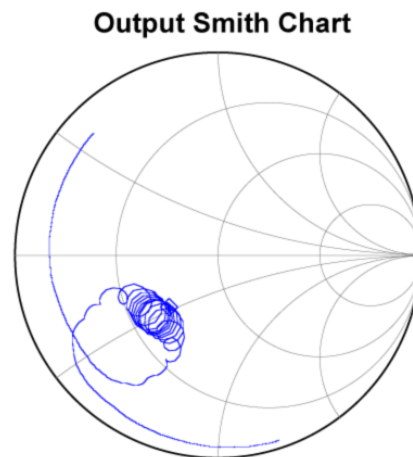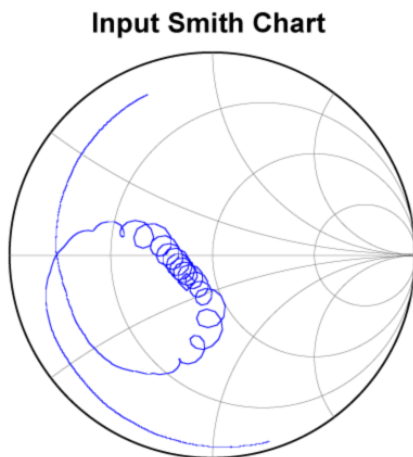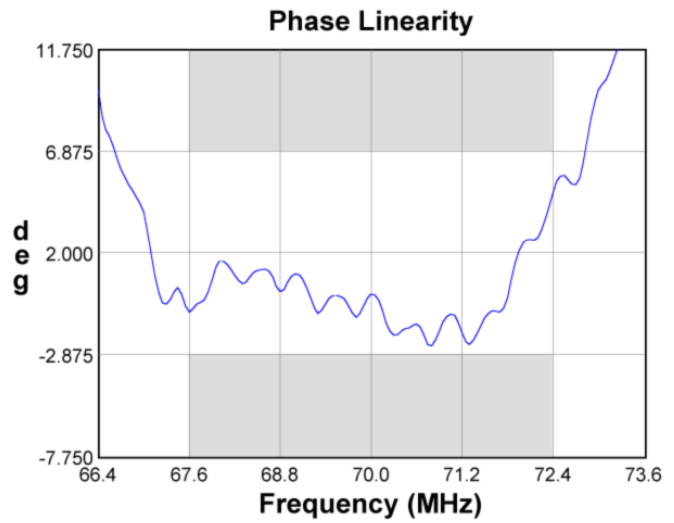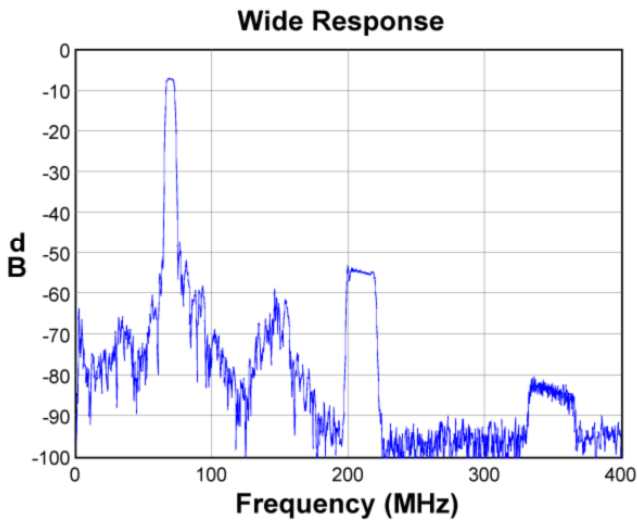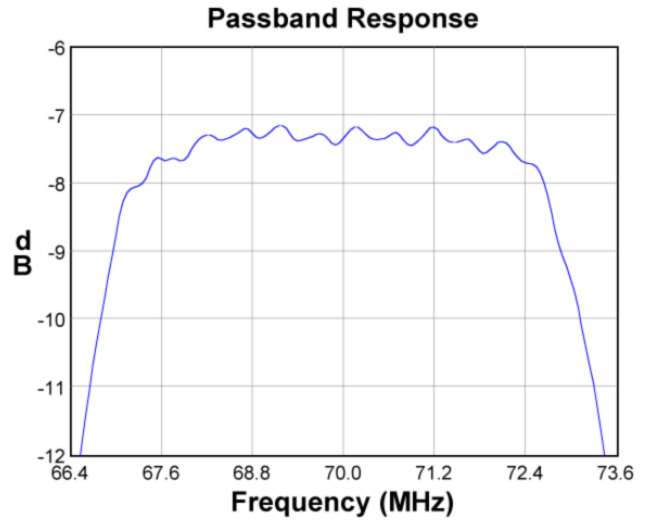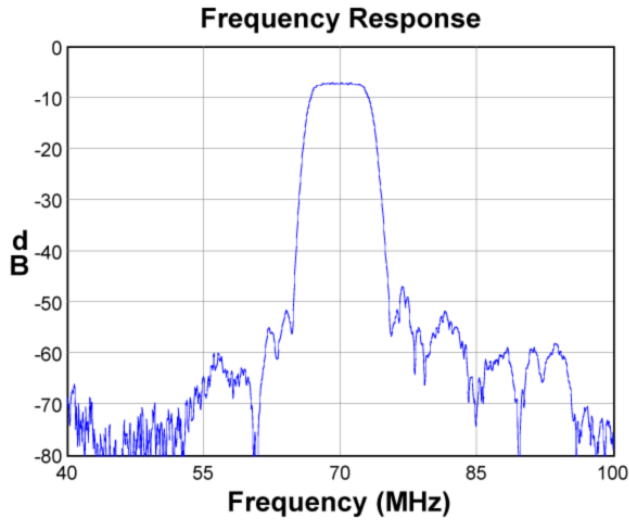


Maximum Ratings


Parameter	Symbol	Minimum	Maximum	Unit
Operating Temperature Range	T	-40	+85	°C
Storage Temperature Range	T _{stg}	-40	+85	°C

Important Notes

Warnings

- Electrostatic Sensitive Device (ESD) 
- Avoid ultrasonic exposure

RoHS Compliance

- This product complies with EU directive 2002/95/EC (RoHS) 

Solderability

- Compatible with JESD22-B102, Pb-free process, 260C peak reflow temperature ([see soldering profile](#))

Links to Additional Technical Information

[PCB Layout Tips](#)

[Qualification Flowchart](#)

[Soldering Profile](#)

[S-Parameters](#)

[RoHS Information](#)

[Other Technical Information](#)

TriQuint's liability is limited only to the Surface Acoustic Wave (SAW) component(s) described in this data sheet. TriQuint does not accept any liability for applications, processes, circuits or assemblies, which are implemented using any TriQuint component described in this data sheet.

Contact Information

TriQuint 
SEMICONDUCTOR

PO Box 609501
Orlando, FL 32860-9501
USA

Phone: +1 (407) 886-8860
Fax: +1 (407) 886-7061
Email: info-product@tqs.com
Web: www.triquint.com

Or contact one of our worldwide
Network of [sales offices](#),
[Representatives or distributors](#)

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Signal Conditioning category](#):

Click to view products by [Qorvo manufacturer](#):

Other Similar products are found below :

[MAPDCC0001](#) [MAPDCC0004](#) [PD0409J5050S2HF](#) [880157](#) [HHS-109-PIN](#) [DC1417J5005AHF](#) [AFS14A30-2185.00-T3](#) [AFS14A35-1591.50-T3](#) [DS-323-PIN](#) [B39321R801H210](#) [1A0220-3](#) [JP510S](#) [LFB212G45SG8C341](#) [LFB322G45SN1A504](#) [LFL182G45TC3B746](#) [SF2159E](#) [30057](#) [FM-104-PIN](#) [CER0813B](#) [MAPDCC0005](#) [3A325](#) [40287](#) [41180](#) [ATB3225-75032NCT](#) [BD0810N50100AHF](#) [BD2425J50200AHF](#) [C5060J5003AHF](#) [JHS-115-PIN](#) [JP503AS](#) [DC0710J5005AHF](#) [DC2327J5005AHF](#) [DC3338J5005AHF](#) [43020](#) [LFB2H2G60BB1C106](#) [LFL15869MTC1B787](#) [X3C19F1-20S](#) [XC3500P-20S](#) [10013-20](#) [SF2194E](#) [CDBLB455KCAX39-B0](#) [TGL2208-SM, EVAL](#) [RF1353C](#) [PD0922J5050D2HF](#) [1E1305-3](#) [1F1304-3S](#) [1G1304-30](#) [B0922J7575AHF](#) [2020-6622-20](#) [TP-103-PIN](#) [BD1222J50200AHF](#)