


Applications

- Marine radar
- Satellite communications
- Point to point communications
- Military communications
- Broadband amplifiers
- High efficiency amplifiers

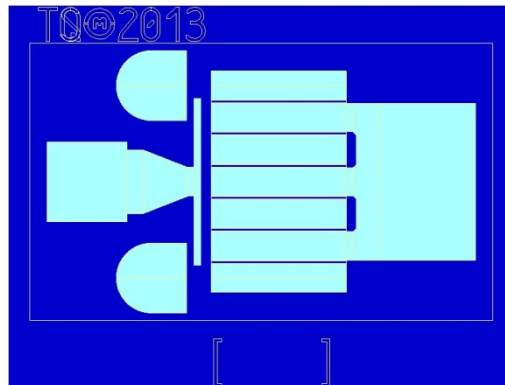

Product Features

- Frequency Range: DC - 14 GHz
- 38.4 dBm Nominal P_{SAT} at 3 GHz
- 75.7% Maximum PAE at 3 GHz
- 20.4 dB Nominal Power Gain at 3 GHz
- Bias: $V_D = 32\text{ V}$, $I_{DQ} = 25\text{ mA}$
- Technology: TQGaN25 on SiC
- Chip Dimensions: 1.01 x 0.82 x 0.10 mm


General Description

The TriQuint TGF2952 is a discrete 1.25 mm GaN on SiC HEMT which operates from DC-14 GHz. The TGF2952 is designed using TriQuint's proven TQGaN25 production process. This process features advanced field plate techniques to optimize microwave power and efficiency at high drain bias operating conditions.

The TGF2952 typically provides 38.4 dBm of saturated output power with power gain of 20.4 dB at 3 GHz. The maximum power added efficiency is 75.7 % which makes the TGF2952 appropriate for high efficiency applications.

Lead-free and RoHS compliant.

Functional Block Diagram



Pad Configuration

Pad No.	Symbol
1	V_G / RF IN
2	V_D / RF OUT
Backside	Source / Ground

Ordering Information

Part	ECCN	Description
TGF2952	EAR99	7 Watt GaN HEMT

Absolute Maximum Ratings

Parameter	Value
Drain to Gate Voltage (V_{DG})	100 V
Drain Voltage (V_D)	40 V
Gate Voltage Range (V_G)	-10 to 0 V
Drain Current (I_D)	0.75 A
Gate Current (I_G)	-1.25 to 2.1 mA
Power Dissipation (P_D)	10.5 W
CW Input Power (P_{IN})	33 dBm
Channel Temperature (T_{CH})	275 °C
Mounting Temperature (30 Sec.)	320 °C
Storage Temperature	-65 to 150 °C

Operation of this device outside the parameter ranges given above may cause permanent damage. These are stress ratings only, and functional operation of the device at these conditions is not implied.

Recommended Operating Conditions

Parameter	Value
Drain Voltage Range (V_D)	32 V
Drain Quiescent Current (I_{DQ})	25 mA
Drain Current Under RF Drive (I_D) ⁽¹⁾	480 mA
Pinch-off Gate Voltage (V_G)	-2.7 V (Typ.)
Channel Temperature (T_{CH})	225 °C (Max.)

(1) 100uS PW, 10% pulses at 3GHz, Power Tuned

RF Characterization – Model Optimum Power Tune

Simulation conditions unless otherwise noted: T = 25 °C, Bond wires not included, Pulse: 100uS PW, 10%. See page 19 for reference planes.

Parameter	Typical Value					Units
	1	3	6	10	15	
Frequency (F)	1	3	6	10	15	GHz
Drain Voltage (V _D)	32	32	32	32	32	V
Bias Current (I _{BQ})	25	25	25	25	25	mA
Output P3dB (P _{3dB})	38.4	38.6	38.5	38.4	38.2	dBm
PAE @ P _{3dB} (PAE _{3dB})	64.9	62.3	59.4	54.0	47.3	%
Gain @ P3dB (G _{3dB})	26.8	20.4	15.3	11.4	8.5	dB
Parallel Output Resistance ⁽¹⁾ (R _p)	94.3	95.2	85.9	70.1	49.8	Ω·mm
Parallel Output Capacitance ⁽¹⁾ (C _p)	-0.018	0.125	0.199	0.205	0.223	pF/mm
Load Impedance (ZL)	75.3-j2.84	72.5+j16.3	48.5+j31.3	30.8+j27.9	19.0+j19.9	Ω
Source Impedance (ZS)	11.6+j76.0	4.02+j23.2	3.80+j12.2	4.06+j4.51	3.97-j0.22	Ω

Notes:

1. Large signal equivalent output network (normalized).

RF Characterization – Model Optimum Efficiency Tune

Simulation conditions unless otherwise noted: T = 25 °C, Bond wires not included, Pulse: 100uS PW, 10%. See page 19 for reference planes.

Parameter	Typical Value					Units
	1	3	6	10	15	
Frequency (F)	1	3	6	10	15	GHz
Drain Voltage (V _D)	32	32	32	32	32	V
Bias Current (I _{BQ})	25	25	25	25	25	mA
Output P3dB (P _{3dB})	36.7	37.3	37.4	37.6	37.9	dBm
PAE @ P _{3dB} (PAE _{3dB})	70.3	67.5	63.9	57.7	48.9	%
Gain @ P3dB (G _{3dB})	28.1	21.9	16.0	11.9	8.7	dB
Parallel Output Resistance ⁽¹⁾ (R _p)	168.4	149.3	134.0	93.4	52.5	Ω·mm
Parallel Output Capacitance ⁽¹⁾ (C _p)	0.249	0.267	0.273	0.276	0.267	pF/mm
Load Impedance (ZL)	126+j33.2	76.3+j57.4	36.8+j50.9	20.6+j33.4	15.3+j20.2	Ω
Source Impedance (ZS)	11.6+j76.0	4.02+j23.2	3.80+j12.2	4.06+j4.51	3.97-j0.22	Ω

Notes:

1. Large signal equivalent output network (normalized).

RF Characterization – Measured Optimum Power Tune

Measured conditions unless otherwise noted: T = 25°C, Bond wires not included, Pulse: 100uS PW, 10%. See page 19 for reference planes.

Parameter	Typical Value		Units
Frequency (F)	3	6	GHz
Drain Voltage (V _b)	32	32	V
Bias Current (I _{bq})	25	25	mA
Input Power	18	23	dBm
Output Power	38.4	38.3	dBm
PAE	66.7	61.9	%
Gain	20.4	15.3	dB
Load Impedance (ZL)	53.6+j33.3	36.1+j32.0	Ω
Source Impedance (ZS)	10.1+j23.6	9.43+j12.0	Ω

RF Characterization – Measured Optimum Efficiency Tune

Measured conditions unless otherwise noted: T = 25°C, Bond wires not included, Pulse: 100uS PW, 10%. See page 19 for reference planes.

Parameter	Typical Value		Units
Frequency (F)	3	6	GHz
Drain Voltage (V _b)	32	32	V
Bias Current (I _{bq})	25	25	mA
Input Power	18	23	dBm
Output Power	37.8	37.7	dBm
PAE	75.7	72.0	%
Gain	19.8	14.7	dB
Load Impedance (ZL)	85.6+j54.8	29.5+j50.7	Ω
Source Impedance (ZS)	10.1+j23.6	9.43+j12.0	Ω

Thermal and Reliability Information - Pulsed ⁽¹⁾

Parameter	Test Conditions	Value	Units
Thermal Resistance, θ_{JC}	$P_D = 7.5\text{ W}$, $T_{\text{baseplate}} = 85^\circ\text{C}$ Pulse: 100 μS , 5%	15.1	$^\circ\text{C/W}$
Channel Temperature, T_{CH}		199	$^\circ\text{C}$
Median Lifetime, T_M		1.78E07	Hrs
Thermal Resistance, θ_{JC}	$P_D = 7.5\text{ W}$, $T_{\text{baseplate}} = 85^\circ\text{C}$ Pulse: 100 μS , 10%	15.5	$^\circ\text{C/W}$
Channel Temperature, T_{CH}		201	$^\circ\text{C}$
Median Lifetime, T_M		1.41E07	Hrs
Thermal Resistance, θ_{JC}	$P_D = 7.5\text{ W}$, $T_{\text{baseplate}} = 85^\circ\text{C}$ Pulse: 100 μS , 20%	16.0	$^\circ\text{C/W}$
Channel Temperature, T_{CH}		205	$^\circ\text{C}$
Median Lifetime, T_M		9.85E06	Hrs
Thermal Resistance, θ_{JC}	$P_D = 7.5\text{ W}$, $T_{\text{baseplate}} = 85^\circ\text{C}$ Pulse: 100 μS , 50%	17.8	$^\circ\text{C/W}$
Channel Temperature, T_{CH}		219	$^\circ\text{C}$
Median Lifetime, T_M		3.15E06	Hrs

Notes:

- Assumes eutectic attach using 1mil thick 80/20 AuSn mounted to a 10 mil CuMo Carrier Plate.


Thermal and Reliability Information - CW ⁽¹⁾

Parameter	Test Conditions	Value	Units
Thermal Resistance, θ_{JC}	$P_D = 3.78\text{ W}$, $T_{\text{baseplate}} = 85^\circ\text{C}$ CW	18.0	$^\circ\text{C/W}$
Channel Temperature, T_{CH}		153	$^\circ\text{C}$
Median Lifetime, T_M		1.75E09	Hrs
Thermal Resistance, θ_{JC}	$P_D = 5.04\text{ W}$, $T_{\text{baseplate}} = 85^\circ\text{C}$ CW	18.8	$^\circ\text{C/W}$
Channel Temperature, T_{CH}		180	$^\circ\text{C}$
Median Lifetime, T_M		1.04E08	Hrs
Thermal Resistance, θ_{JC}	$P_D = 6.30\text{ W}$, $T_{\text{baseplate}} = 85^\circ\text{C}$ CW	20	$^\circ\text{C/W}$
Channel Temperature, T_{CH}		211	$^\circ\text{C}$
Median Lifetime, T_M		5.99E06	Hrs
Thermal Resistance, θ_{JC}	$P_D = 7.56\text{ W}$, $T_{\text{baseplate}} = 85^\circ\text{C}$ CW	21.2	$^\circ\text{C/W}$
Channel Temperature, T_{CH}		245	$^\circ\text{C}$
Median Lifetime, T_M		3.79E05	Hrs


Notes:

- Assumes eutectic attach using 1mil thick 80/20 AuSn mounted to a 10 mil CuMo Carrier Plate.


Median LifeTime

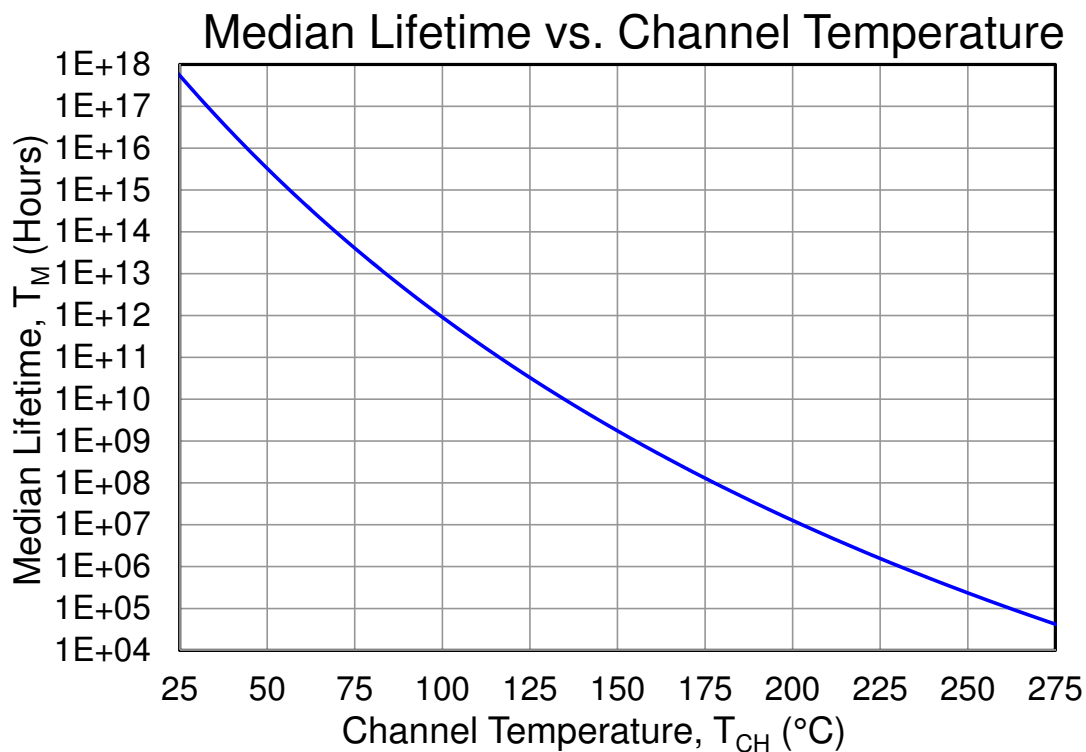

Maximum Channel Temperature - Pulsed

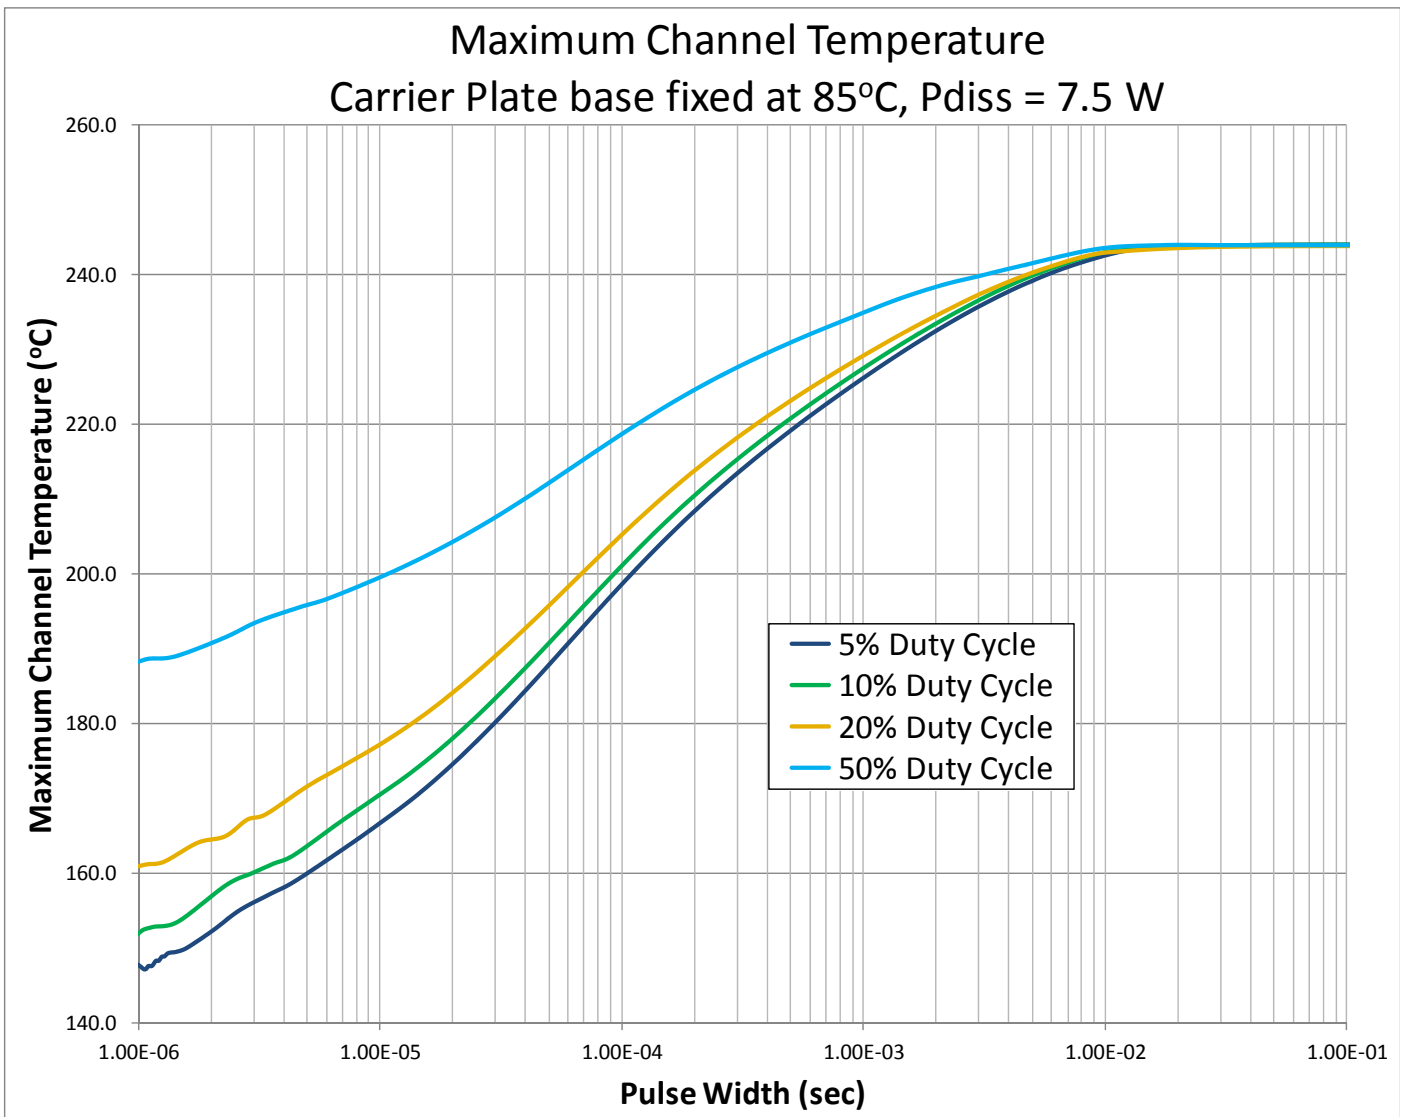


Maximum Channel Temperature - CW

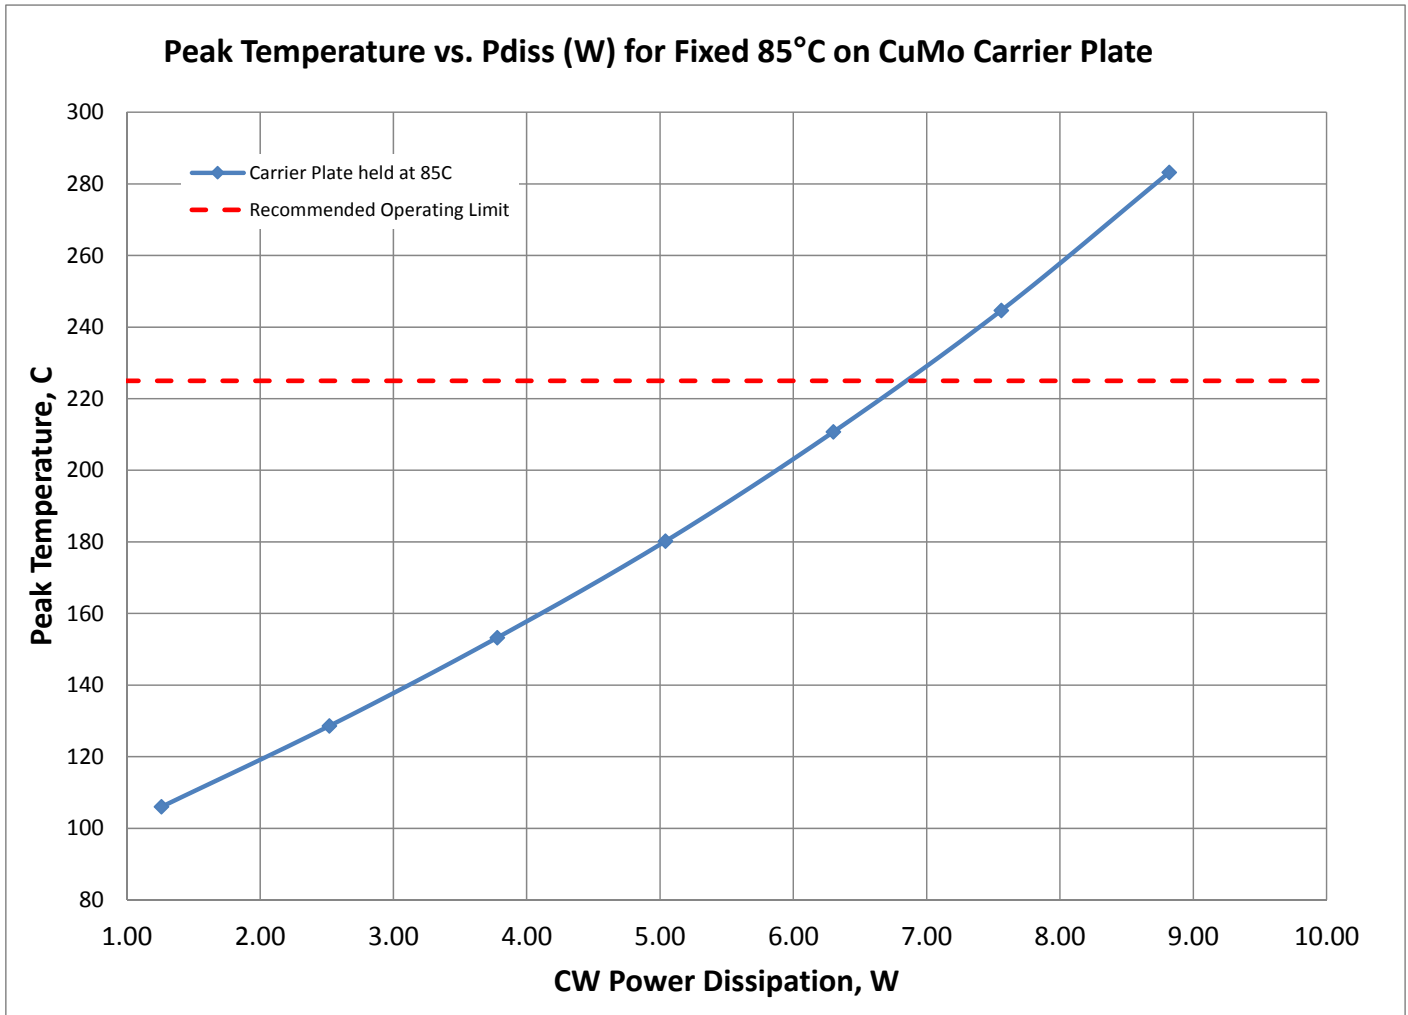

Model Maximum Gain Performance

Bond wires are not included. See page 19 for reference planes.


Maximum Gain vs. Frequency

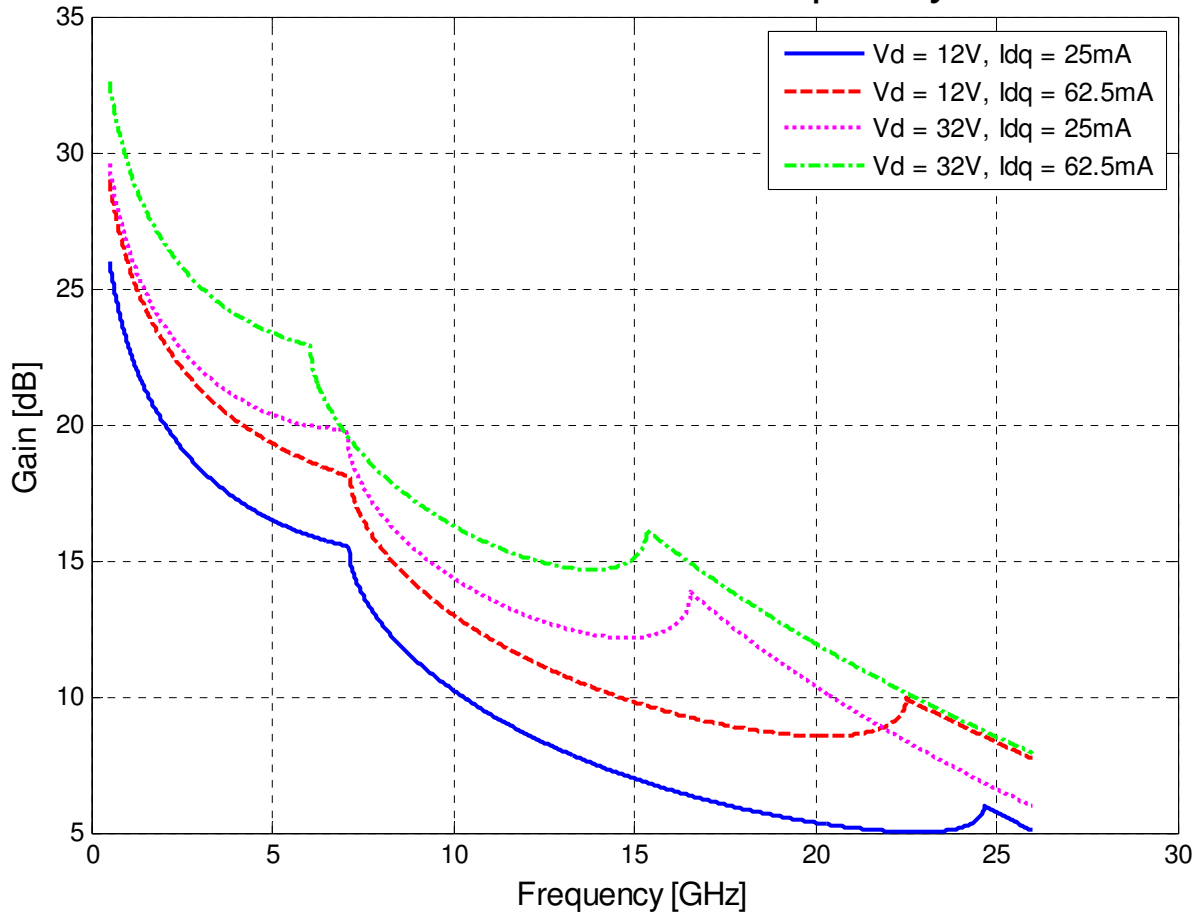

Measured Maximum Gain Performance


Bond wires are not included. See page 19 for reference planes.

Maximum Gain vs. Frequency

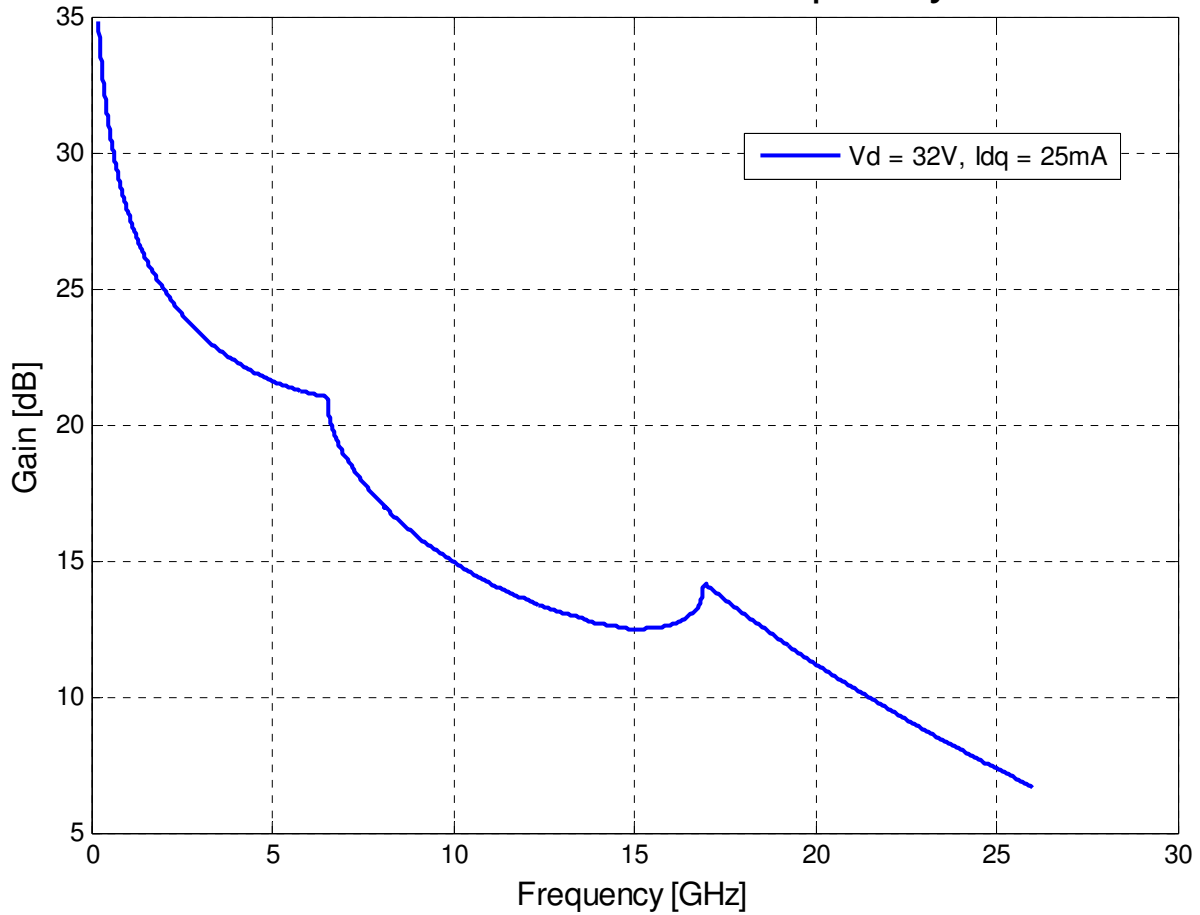

Model Load Pull Contours

V_{ds} = 32V, I_{dq} = 25mA, Simulated signal: 10% pulses. Bond wires not included. See page 19 for reference planes. 3dB compression performance referenced to large-signal peak gain.

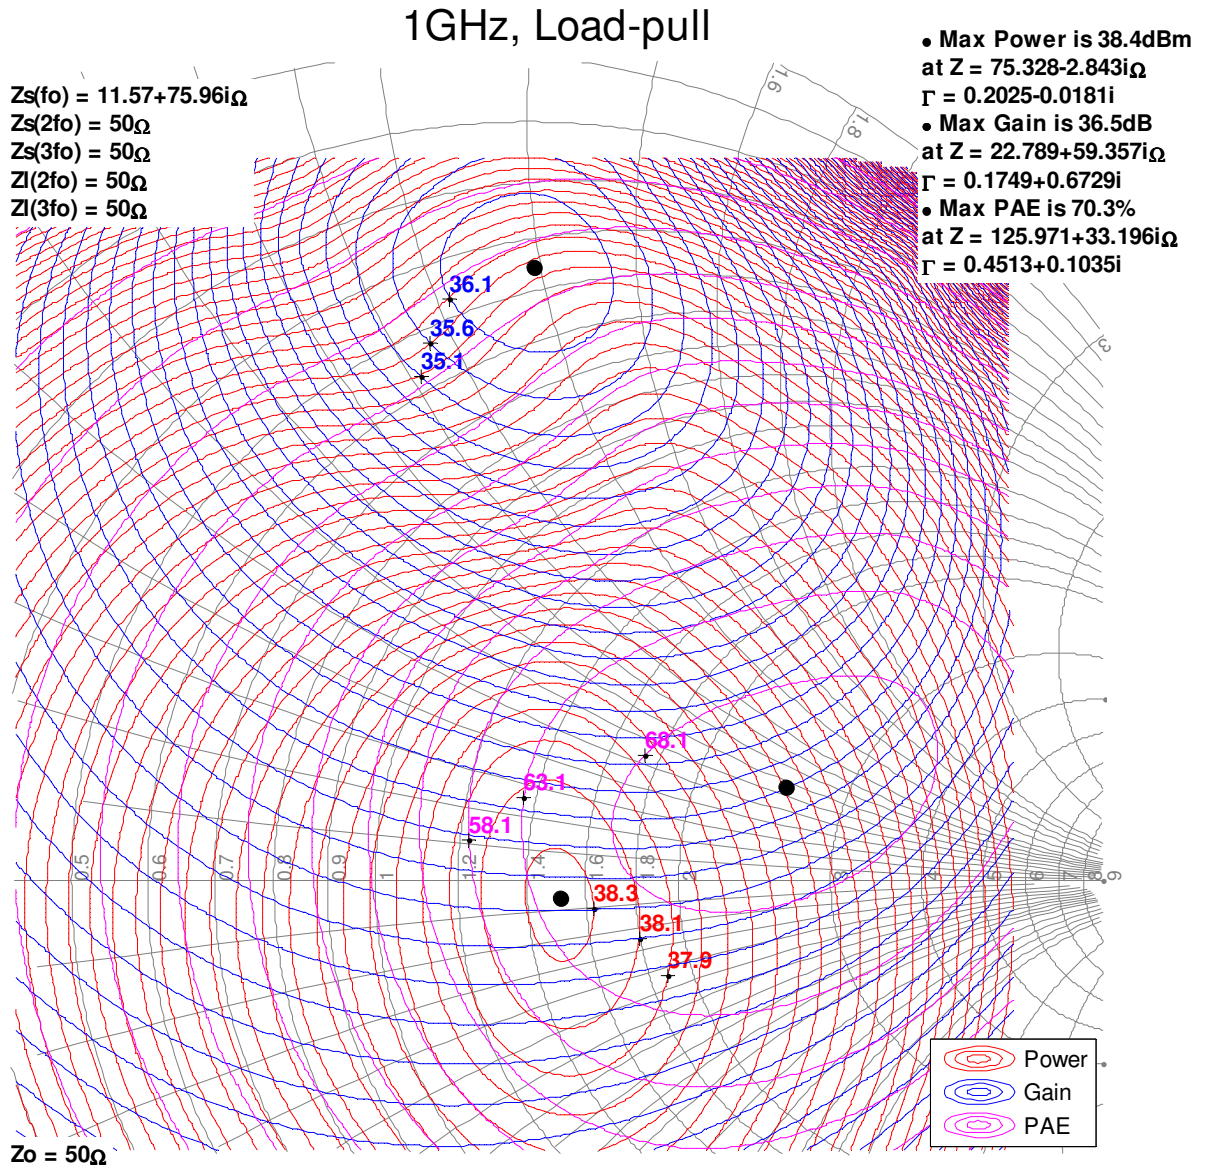


Model Load Pull Contours

Vds = 32V, Idq = 25mA, Simulated signal: 10% pulses. Bond wires not included. See page 19 for reference planes.
3dB compression performance referenced to large-signal peak gain.

3GHz, Load-pull

Zs(fo) = 4.02+23.21iΩ
Zs(2fo) = 50Ω
Zs(3fo) = 50Ω
Zl(2fo) = 50Ω
Zl(3fo) = 50Ω

- Max Power is 38.6dBm at Z = 72.504+16.349iΩ
Γ = 0.198+0.107i
- Max Gain is 26.1dB at Z = 20.868+59.545iΩ
Γ = 0.1729+0.695i
- Max PAE is 67.5% at Z = 76.328+57.36iΩ
Γ = 0.3437+0.298i

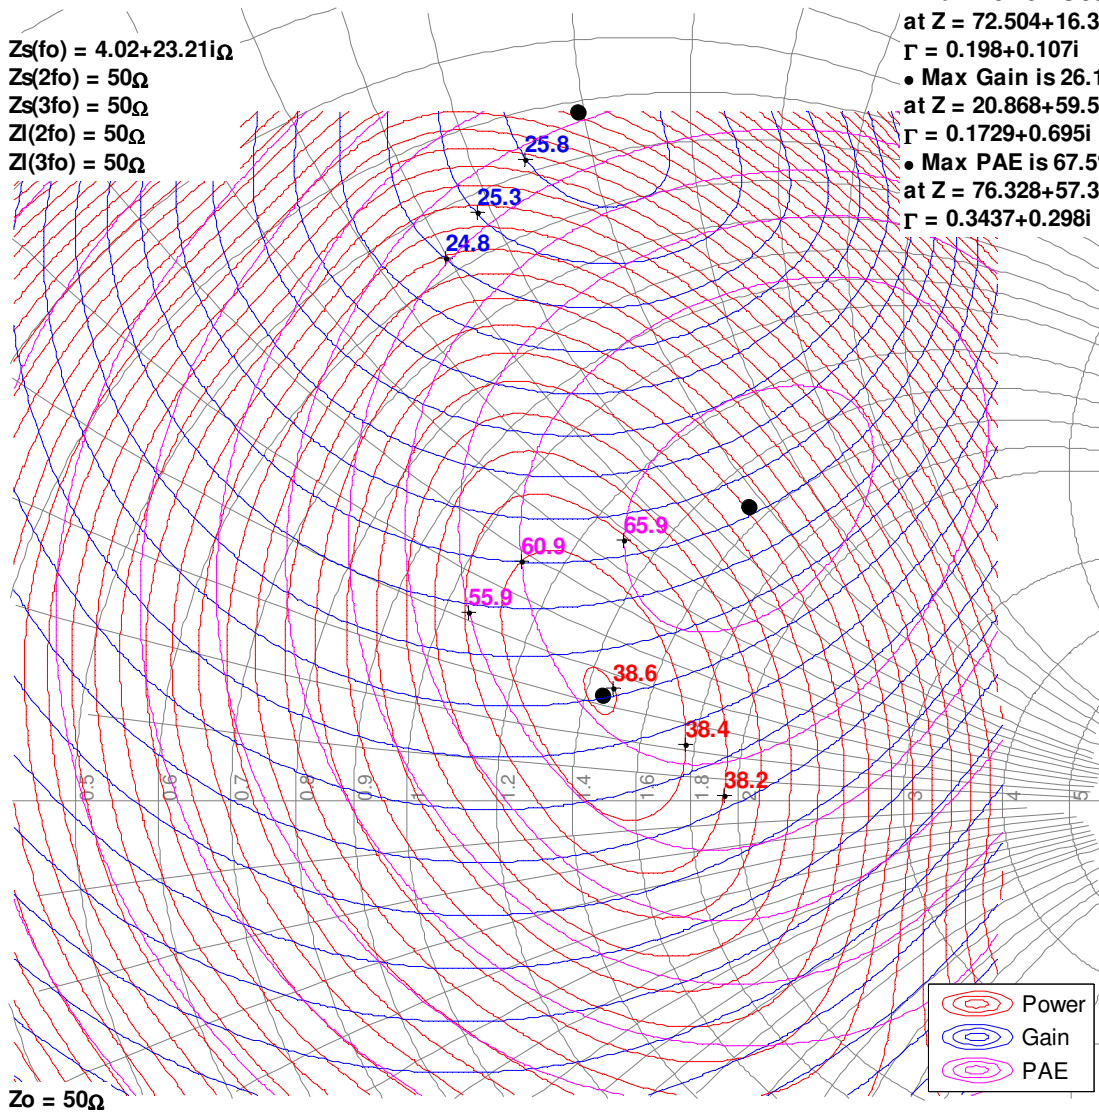


Model Load Pull Contours

Vds = 32V, Idq = 25mA, Simulated signal: 10% pulses. Bond wires not included. See page 19 for reference planes. 3dB compression performance referenced to large-signal peak gain.

6GHz, Load-pull

Zs(fo) = 3.8+12.24iΩ
 Zs(2fo) = 50Ω
 Zs(3fo) = 50Ω
 Zl(2fo) = 50Ω
 Zl(3fo) = 50Ω


- Max Power is 38.5dBm at Z = 48.472+31.339iΩ
 Γ = 0.0779+0.2935i
- Max Gain is 16.9dB at Z = 16.611+44.172iΩ
 Γ = -0.0427+0.6915i
- Max PAE is 63.9% at Z = 36.842+50.934iΩ
 Γ = 0.1432+0.5025i

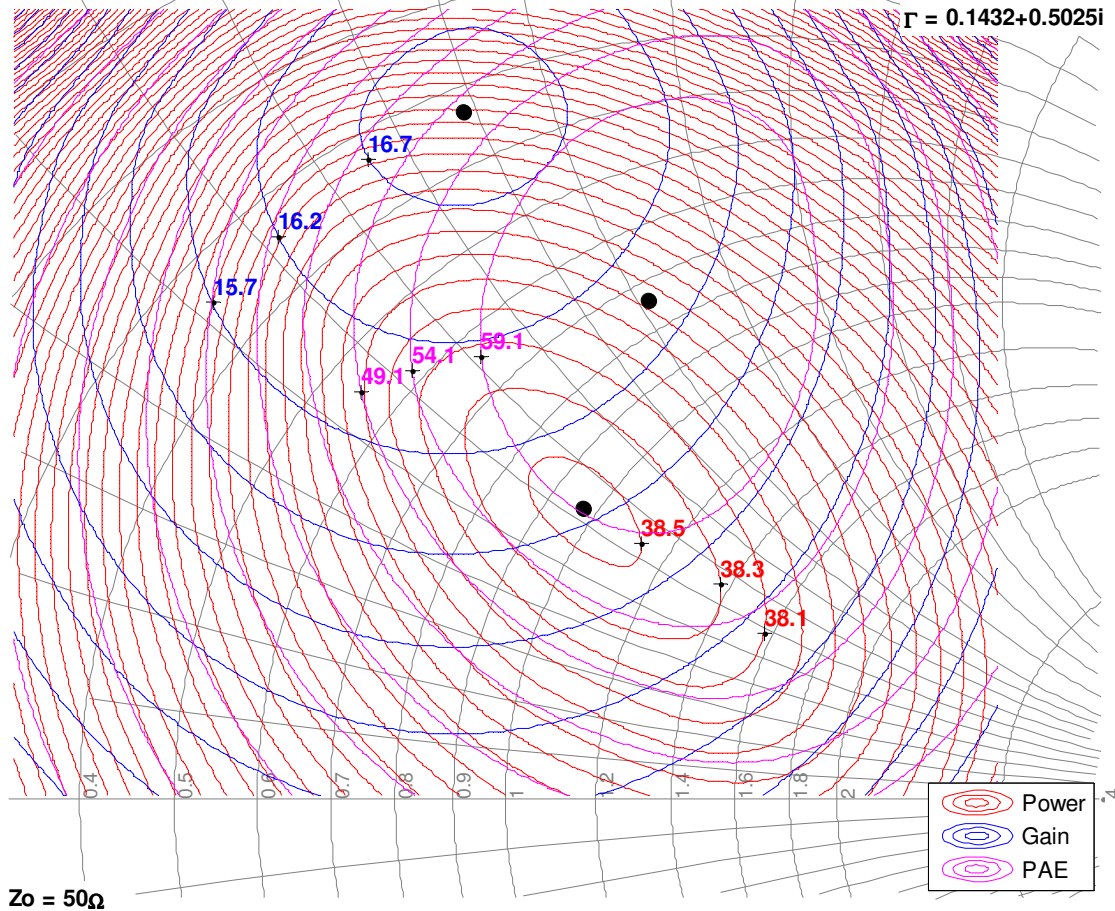

Model Load Pull Contours

Vds = 32V, Idq = 25mA, Simulated signal: 10% pulses. Bond wires not included. See page 19 for reference planes. 3dB compression performance referenced to large-signal peak gain.


10GHz, Load-pull

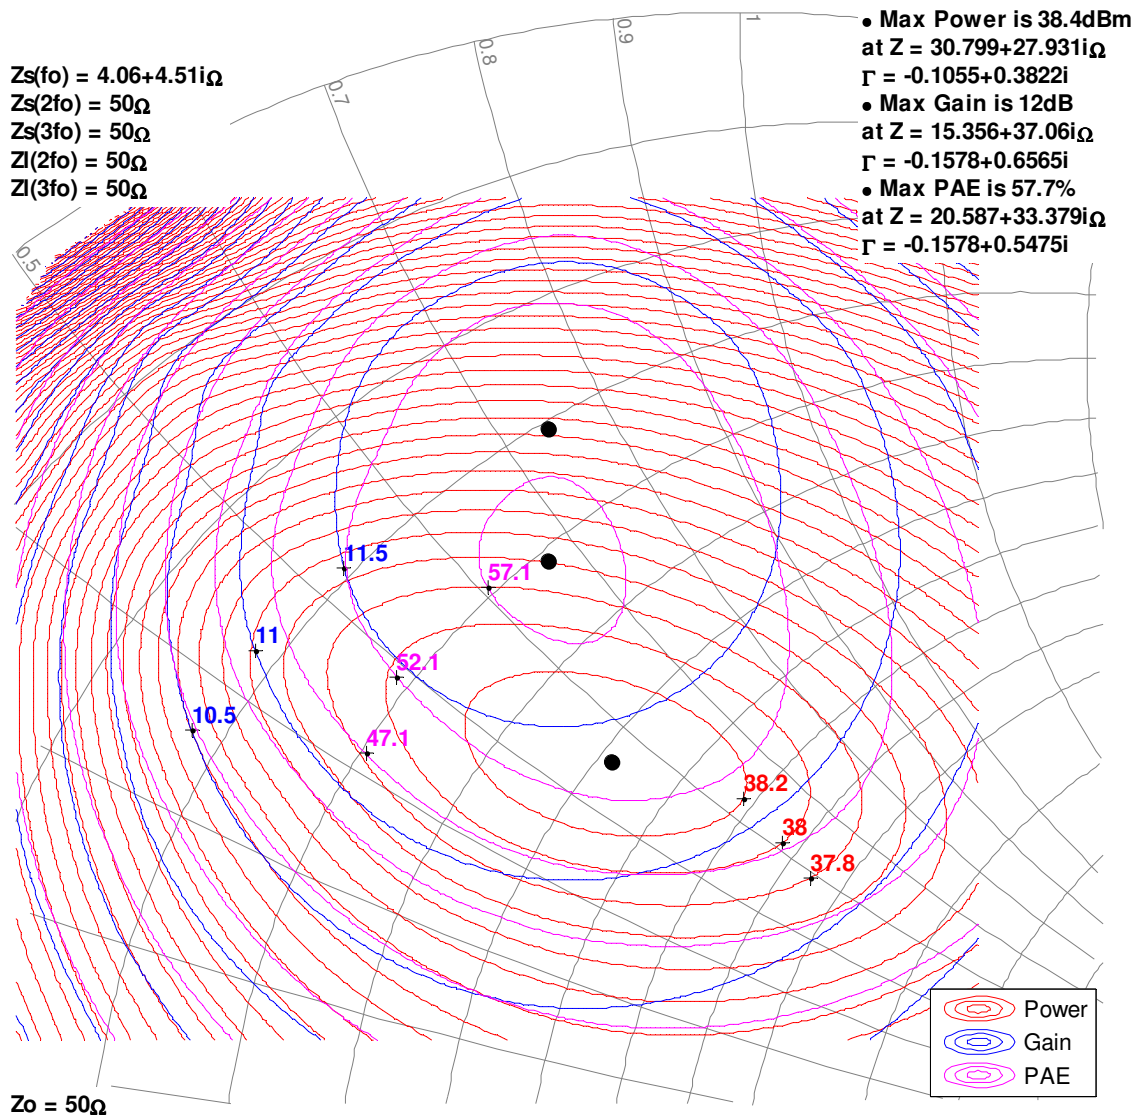

Model Load Pull Contours






Vds = 32V, Idq = 25mA, Simulated signal: 10% pulses. Bond wires not included. See page 19 for reference planes.
 3dB compression performance referenced to large-signal peak gain.

15GHz, Load-pull

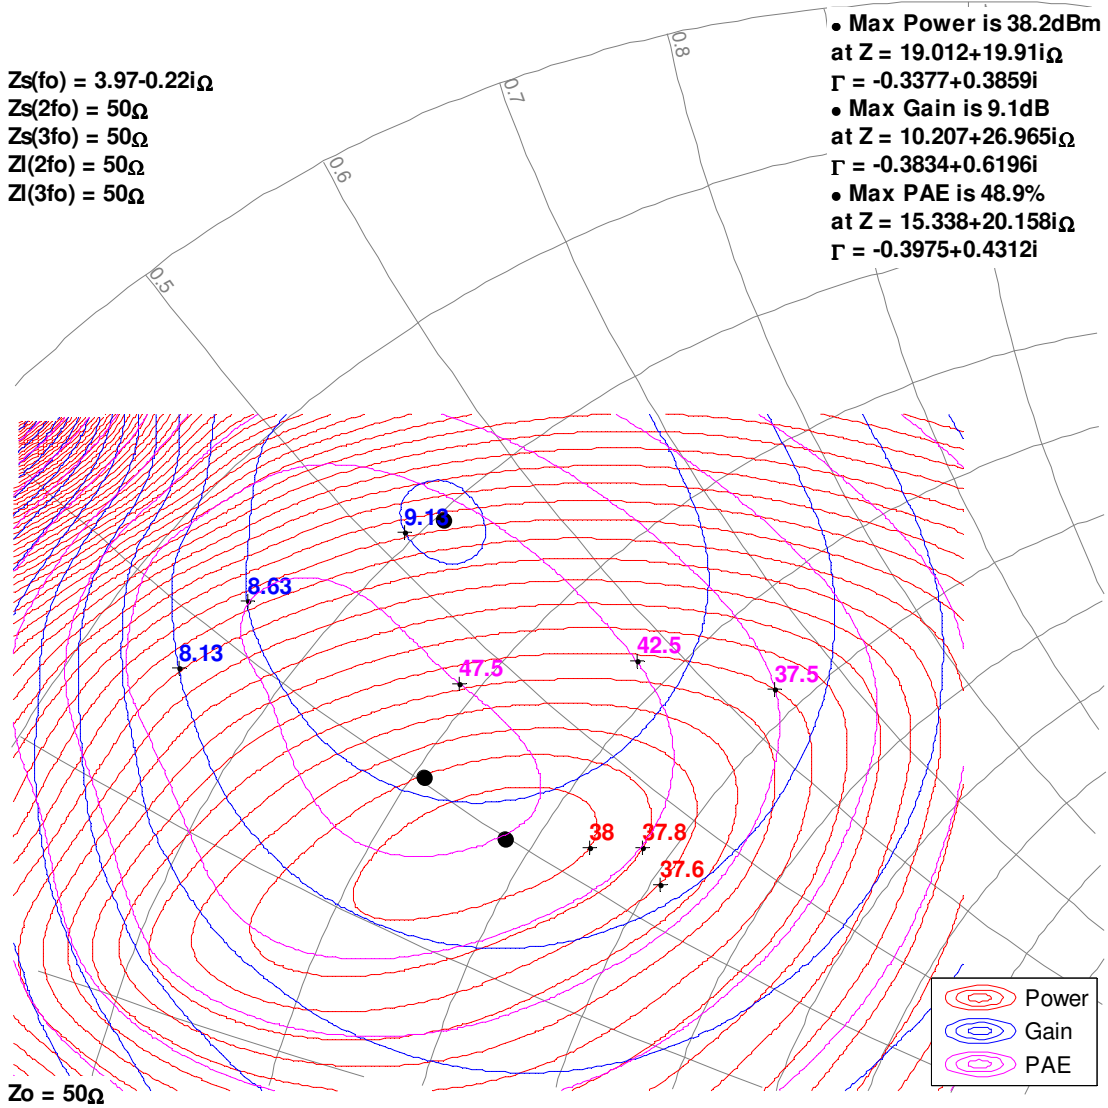






Model Power Tuned Data

Bond wires not included. See page 19 for reference planes.

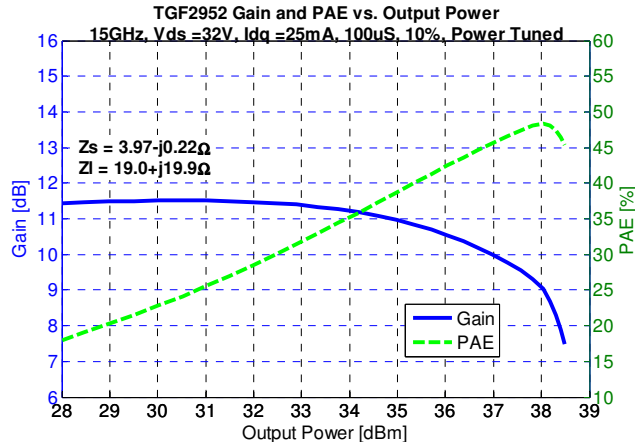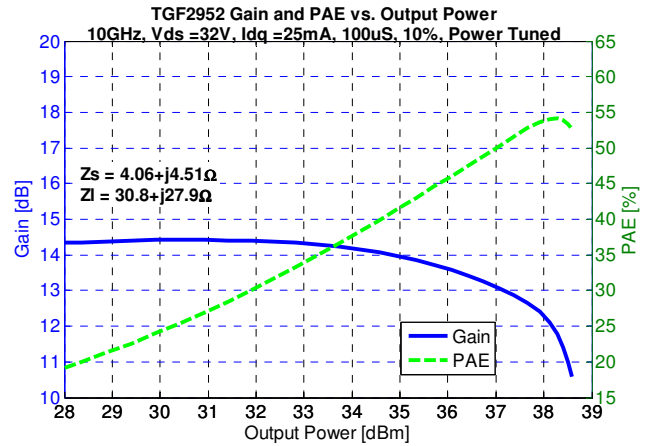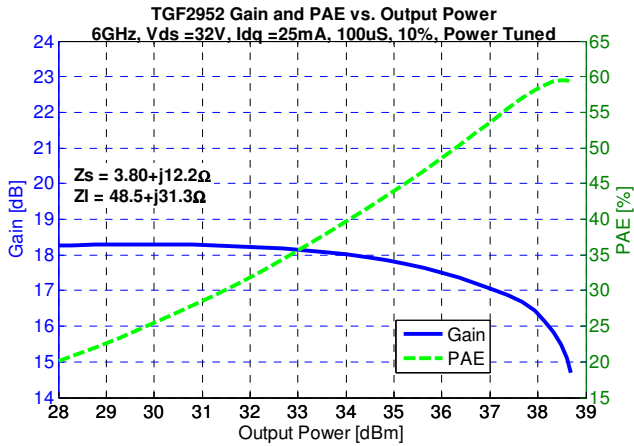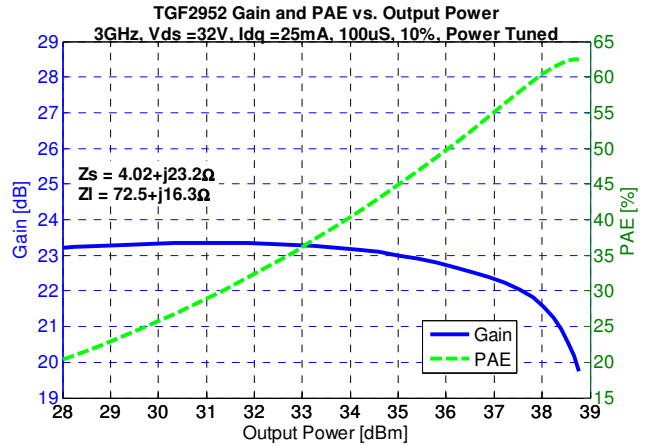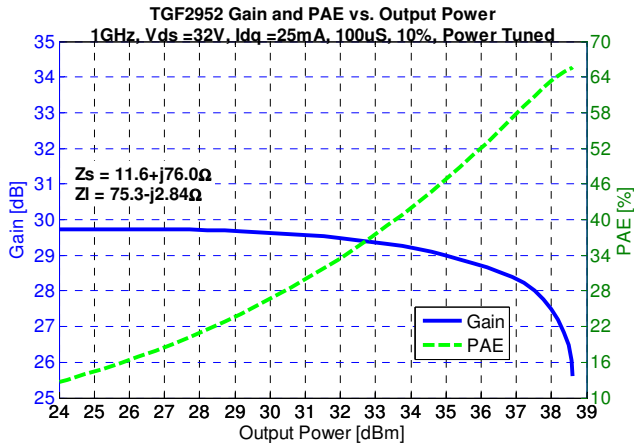



Model Efficiency Tuned Data

Bond wires not included. See page 19 for reference planes.

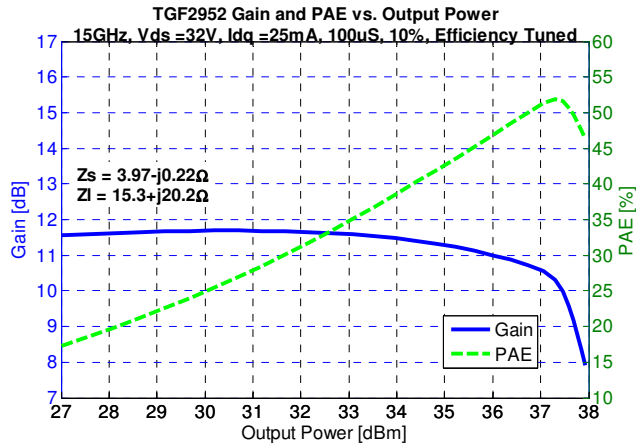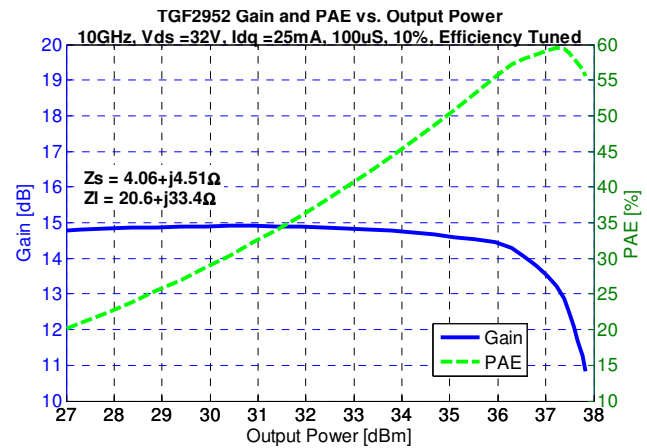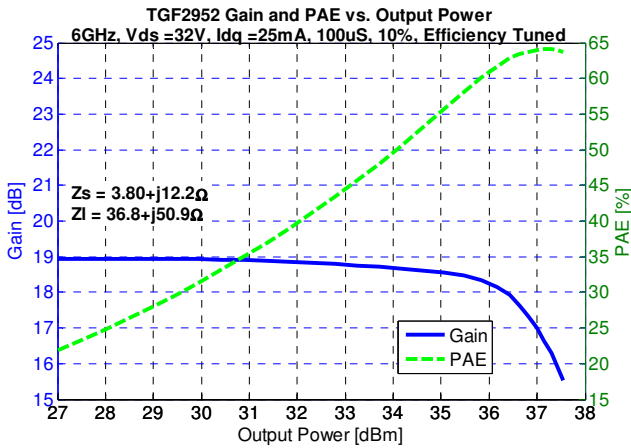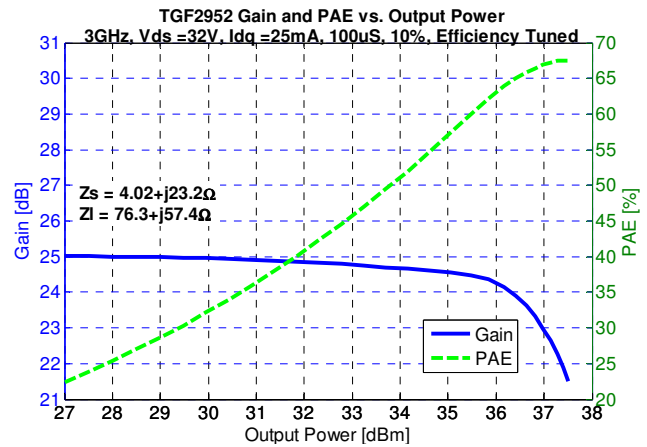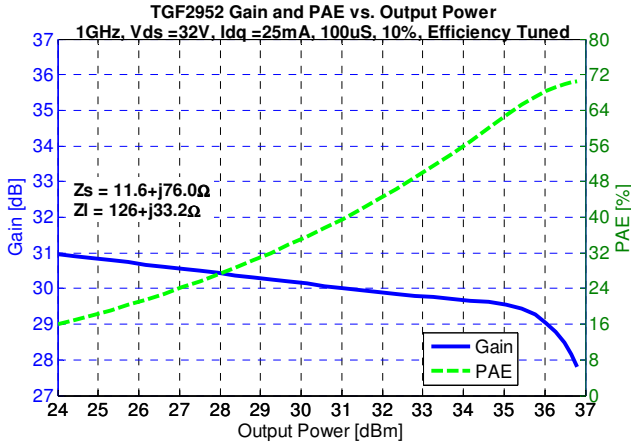


Measured Power Tuned Data

Bond wires not included. See page 19 for reference planes.

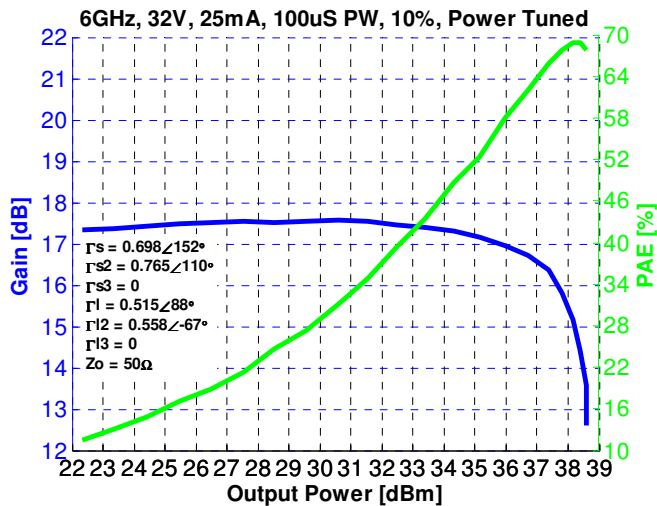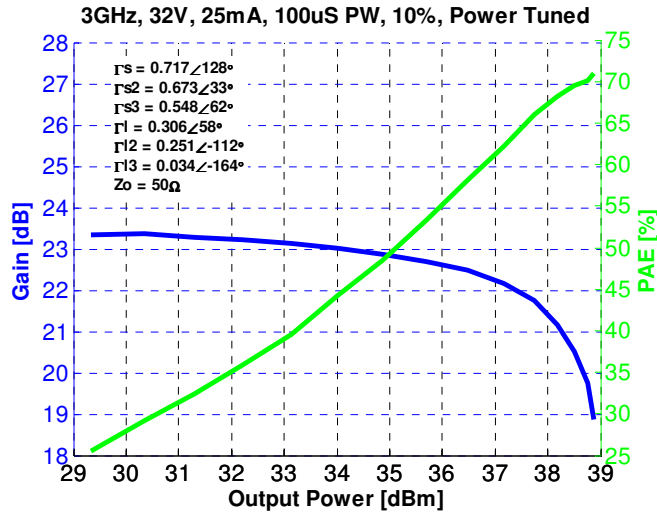

Mechanical Drawing

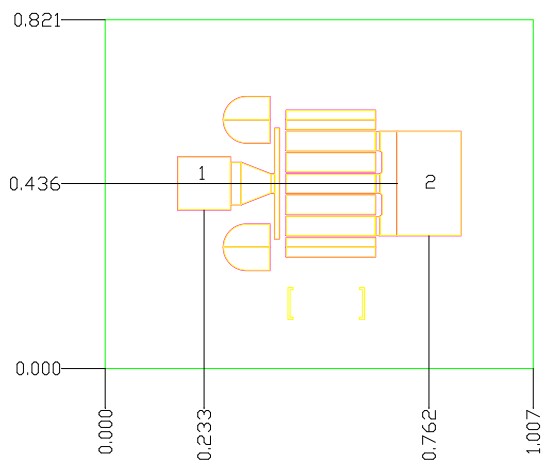


1. Units: millimeters
2. Thickness: 0.100 mm
3. Die xy size tolerance: ± 0.050 mm

Bond Pads

Pad No.	Description	Dimensions
1	Gate	0.125 x 0.125
2	Drain	0.150 x 0.246
Die Backside	Source / Ground	1.007 x 0.821

Reference Planes

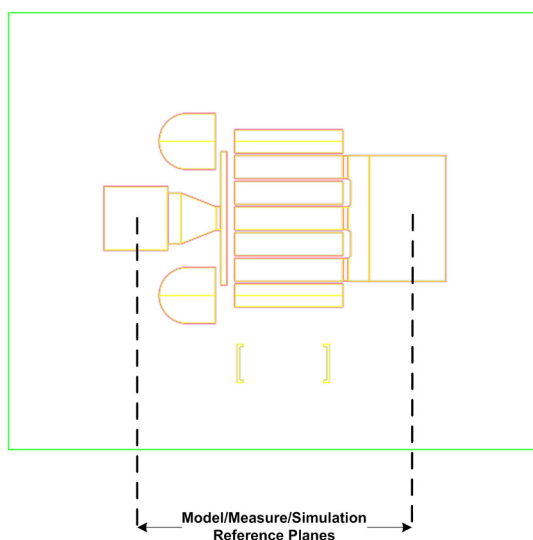

Model

A model is available for download from Modelithics (at <http://www.modelithics.com/mvp/Triquint&tab=3>) by approved TriQuint customers. The model is compatible with the industry's most popular design software including Agilent ADS and National Instruments/AWR applications. Once on the Modelithics web page, the user will need to register for a free license before being granted the download.

Assembly Notes

Component placement and adhesive attachment assembly notes:

- Vacuum pencils and/or vacuum collets are the preferred method of pick up.
- Air bridges must be avoided during placement.
- The force impact is critical during auto placement.
- Organic attachment (i.e. epoxy) not recommended.

Reflow process assembly notes:

- Use AuSn (80/20) solder and limit exposure to temperatures above 300°C to 3-4 minutes, maximum.
- An alloy station or conveyor furnace with reducing atmosphere should be used.
- Do not use any kind of flux.
- Coefficient of thermal expansion matching is critical for long-term reliability.
- Devices must be stored in a dry nitrogen atmosphere.

Interconnect process assembly notes:

- Ball bonding is the preferred interconnect technique, except where noted on the assembly diagram.
- Force, time, and ultrasonics are critical bonding parameters.
- Aluminum wire should not be used.
- Devices with small pad sizes should be bonded with 0.0007-inch wire.

Disclaimer

GaN/SiC devices are susceptible to damage from Electrostatic Discharge. Proper precautions should be observed during handling, assembly and test.

Bias-up Procedure

1. V_G set to -5 V.
2. V_D set to 32 V.
3. Adjust V_G more positive until quiescent I_D is 25 mA.
4. Apply RF signal.

Bias-down Procedure

1. Turn off RF signal.
2. Turn off V_D and wait 1 second to allow drain capacitor dissipation.
3. Turn off V_G .

Product Compliance Information

ESD Sensitivity Ratings



Caution! ESD-Sensitive Device

ESD Rating: TBD
Value: TBD
Test: TBD
Standard: TBD

Solderability

Compatible with gold/tin (320°C maximum reflow temperature) soldering processes.

RoHS Compliance

This part is compliant with EU 2002/95/EC RoHS directive (Restrictions on the Use of Certain Hazardous Substances in Electrical and Electronic Equipment).

This product also has the following attributes:

- Lead Free
- Halogen Free (Chlorine, Bromine)
- Antimony Free
- TBBP-A (C₁₅H₁₂Br₄O₂) Free
- PFOS Free
- SVHC Free

Contact Information

For the latest specifications, additional product information, worldwide sales and distribution locations, and information about TriQuint:

Web: www.triquint.com

Email: info-sales@triquint.com

Tel: +1.972.994.8465

Fax: +1.972.994.8504

For technical questions and application information:

Email: info-products@triquint.com

Important Notice

The information contained herein is believed to be reliable. TriQuint makes no warranties regarding the information contained herein. TriQuint assumes no responsibility or liability whatsoever for any of the information contained herein. TriQuint assumes no responsibility or liability whatsoever for the use of the information contained herein. The information contained herein is provided "AS IS, WHERE IS" and with all faults, and the entire risk associated with such information is entirely with the user. All information contained herein is subject to change without notice. Customers should obtain and verify the latest relevant information before placing orders for TriQuint products. The information contained herein or any use of such information does not grant, explicitly or implicitly, to any party any patent rights, licenses, or any other intellectual property rights, whether with regard to such information itself or anything described by such information.

TriQuint products are not warranted or authorized for use as critical components in medical, life-saving, or life-sustaining applications, or other applications where a failure would reasonably be expected to cause severe personal injury or death.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [RF JFET Transistors](#) category:

Click to view products by [Qorvo](#) manufacturer:

Other Similar products are found below :

[CE3514M4](#) [CE3514M4-C2](#) [CE3520K3-C1](#) [CE3521M4](#) [CE3521M4-C2](#) [CE3512K2-C1](#) [CE3520K3](#) [CG2H80030D-GP4](#) [TGF2023-2-02](#)
[NPT1004D](#) [MAGX-011086](#) [NPT25015D](#) [JANTXV2N4858](#) [NPT2021](#) [NPTB00025B](#) [TGF2965-SM](#) [QPD1009](#) [QPD1010](#) [2SK3557-6-TB-E](#)
[J211_D74Z](#) [NPTB00004A](#) [MMBFJ211](#) [QPD0020](#) [QPD1006](#) [QPD1016](#) [QPD1025L](#) [QPD1029L](#) [QPD1881L](#) [T2G6001528-Q3](#) [SKY65050-](#)
[372LF](#) [J304](#) [CGH27015F](#) [CGH55015F1](#) [CMPA801B030F](#) [GTVA262711FA-V2-R0](#) [GTVA262701FA-V2-R0](#) [CGH40006S](#) [CGH40010F](#)
[CGH40025F](#) [CGH40045F](#) [CGH40120F](#) [CGH55015F2](#) [CGH60008D](#) [CGH60030D](#) [CGHV14500F](#) [CGHV1F006S](#) [CGHV1J006D](#)
[CGHV27030S](#) [CGHV27060MP](#) [CGHV40030F](#)