

11 Series


RoHS Compliant

NYLON 6.6

GENERAL PURPOSE

APPLICATION OPERATING TEMPERATURE: -40°C to +85°C

APPROVALS¹: 

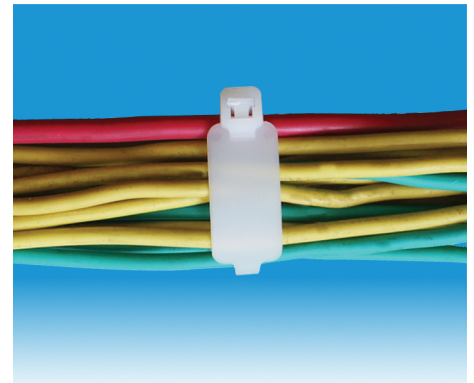


Part Number	Width mm [Inch]	Length mm [Inch]	Max Bundle Diameter mm [Inch]	Min Loop Tensile Kg [lb]	Write Area mm [Inch]
M - 18lb TYPE A					
11-M100	2.5 [.098]	100 [4.0]	22.0 [0.86]	8 [18]	7.75x24.5 [0.30x0.95]
11-M200	2.5 [.098]	200 [8.0]	53.9 [2.12]	8 [18]	7.75x24.5 [0.30x0.95]
M - 18lb TYPE C					
11-M110	2.5 [.098]	110 [4.3]	22.6 [0.89]	8 [18]	9.0x20 [0.35x0.78]
S - 50lb TYPE B					
11-S190	4.8 [.189]	190 [7.0]	50.9 [2.00]	22 [50]	12.9x27 [0.50x1.05]

Notes:
1. 11-M110 and 11-M200 are not UL approved


TYPE A

TYPE B

TYPE C

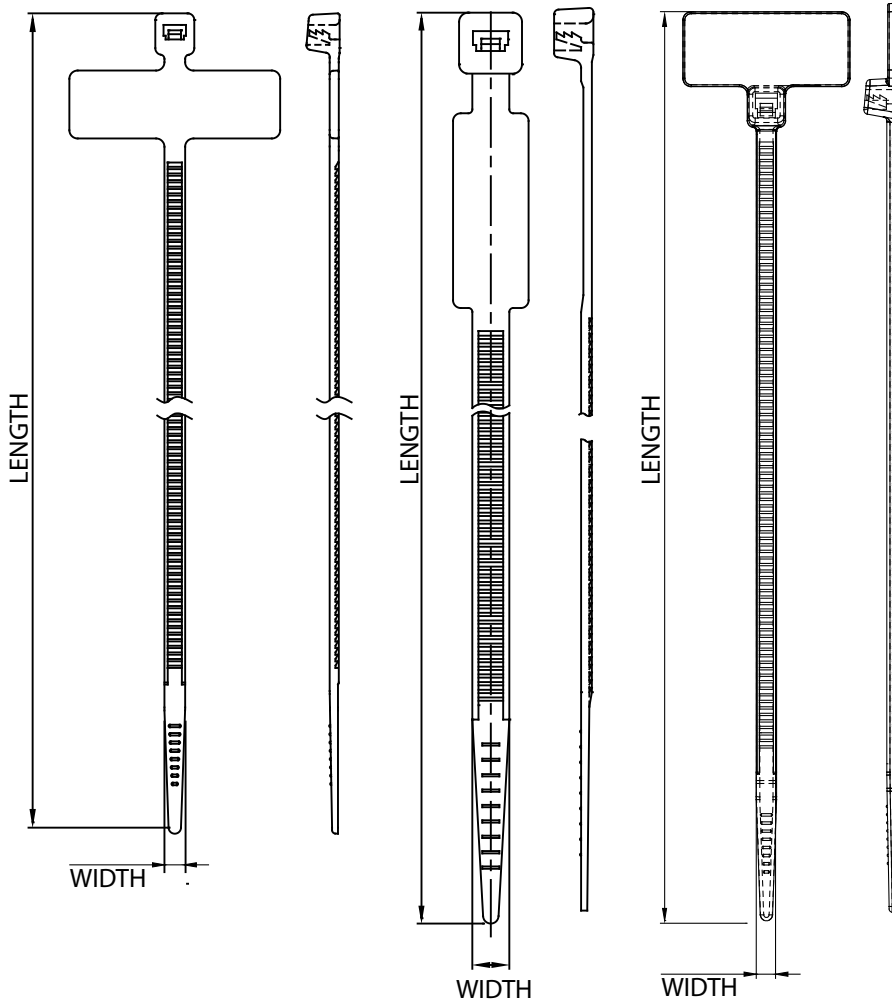

PART NUMBER SYSTEM



SERIES
CROSS SECTION
LENGTH
MATERIAL/COLOR

N: Natural
B: Normal UV Black

PACKAGE SIZE

C: 100PCS
Number: Other Quantity

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Cable Ties](#) category:

Click to view products by [Qualtek](#) manufacturer:

Other Similar products are found below :

[65034-C](#) [65037-C](#) [770-1751-10](#) [REL50L0C2](#) [20093-0](#) [SF600-120X](#) [SJ3518FR-1x50](#) [SJ3526N-Beige-2"x50yd](#) [SJ3526N BLACK 58" X 50YD](#) [SJ3571](#) [SJ-3571-1"x50yd-Black](#) [PLT2S-C4](#) [34-455-C](#) [3722](#) [561-B110120](#) [561-N3510](#) [TYZ528M](#) [34-463-C](#) [URT20S-M](#) [06226](#) [08350-0](#) [08600-0](#) [08376-0](#) [10325-0](#) [10362-0](#) [10606-0](#) [561-EZ250](#) [561-EZ625](#) [SJ3527N-Beige-2"x50yd](#) [SJ3527N-LOOP-BLACK-1](#) [SJ3572-2"x50yd-Black](#) [CF5625-000](#) [V03HK](#) [65004-C](#) [65005-C](#) [65007-C](#) [65036-C](#) [157-00039](#) [770-1708](#) [770-1753-10](#) [65035-C](#) [770-1752](#) [SPNY-041-9](#) [SF400-120X](#) [3719](#) [08582-0](#) [08386-0](#) [10431-0](#) [08359-0](#) [10620-0](#)