

THESE DRAWINGS ARE THE PROPERTY OF QUALTEK ELECTRONICS AND NOT TO BE REPRODUCED FOR OR COMMUNICATED TO A THIRD PARTY WITHOUT THE EXPRESS WRITTEN PERMISSION OF AN OFFICER OF QUALTEK ELECTRONICS.

REVISION						
REV.	DESCRIPTION	DATE	APPROVED			
В	RoHS Compliancy	06-01-06	DP			

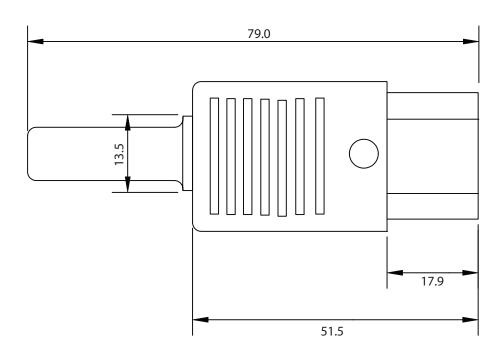



NOTES:

FOR USE WITH 18 AWG CORDAGE MAX. RATING: 10A 250V AC

CONTACT RESISTANCE: < 10m OHM INSULATION RESISTANCE: > 1,000M OHM

A.C. BREAKDOWN: POLE-POLE 4.5 kV POLE- ACCESSIBLE 4 kV

OPERATING TEMPERATURE: -40°C TO +70°C WITHDRAWL FORCE: 10N(MIN), 50N(MAX)

MATERIAL:

MOULDING: NYLON, FLAMMABILITY RATING U.L. 94V-0

CONTACTS: BRASS, NICKEL PLATED

APPROVALS: UL, CSA, VDE

RoHS COMPLIANT

CONTROLLED

Dim range	Tolerance +/-	Qualtek Electronics Corp. PPC DIVISION				
(mm)	(mm)	Part Number:	704-00/00	RoHS Compliant		
0-1	0.15	Description: REWIRABLE PLUG ASSEMBLY				
1-6	0.20					
6-18	0.30		LINUT	סביי		
18-50	0.50		UNIT: mm	REV. B		
50-120	0.70	Drawn / Date	Checked / Date	Approved / Date		
120-250	0.90	B.ZHANG	12-30-02	JJH / 12-30-02		
250-500	1.20	12-30-02	12 30-02	33117 12 30 02		

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for AC Power Entry Modules category:

Click to view products by Qualtek manufacturer:

Other Similar products are found below:

0098.0050 6167.0002 6609100-2 7-6609955-2 FKI2-50-6/M5 FN361-6-06 FN389-4-22 FN9226B-6-02 FN9233S1-10-06 FN9233S1-8-06 FN9233S1B-8-06 FN9233S1R-1-06 FN9233S1R-12-06 FN9233SB-1-06 FN9233SB-12-06 FN9233SB-8-06 FN9233SR-10-06 FN9244B-15-06HI FN9244EB-3-06 FN9244EB-8-06 FN9244ER-15-06 FN9244ER-8-06 FN9244ES1-8-06 FN9244ESB-8-06 FN924ESB-8-06 FN924ESB