


THESE DRAWINGS ARE THE PROPERTY OF QUALTEK ELECTRONICS AND NOT TO BE REPRODUCED FOR OR COMMUNICATED TO A THIRD PARTY WITHOUT THE EXPRESS WRITTEN PERMISSION OF AN OFFICER


OF QUALTEK ELECTRONICS.

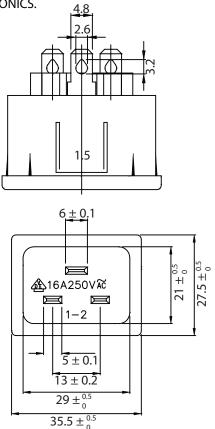


3.1	1 3 2	
2 2 ± 0.05 [w		7
8 + 0.2	8:0	14.4
	$ \begin{array}{c c} 14 \pm \frac{1}{0.5} \\ 17 \pm \frac{0.5}{0} \\ 10 \pm 0.5 \end{array} $	4)







PANEL CUTOUT



CONTROLLED

Soldering PIN Bronze Strip t=0.8mm Tin-Plated	3
Contact PIN Bronze Strip t=2mm Ni-Plated	2
Contact PIN Bronze Strip t=2mm Ni-Plated	1
Body Insulator PC 241R Black Color	1
	Contact PIN Bronze Strip t=2mm Ni-Plated Contact PIN Bronze Strip t=2mm Ni-Plated

· ·						
Dim range	Tolerance +/-	Qualtek Electronics Corp. PPC DIVISION				
(mm)	(mm)	Part Number:	745W-15/07	RoHS Compliant		
0-1	0.15	Description:	C RECEPTACLE			
1-6	0.20	AC NECEPTACLE				
6-18	0.30			DEV. C		
18-50	0.50		UNIT: mm	REV. C		
50-120	0.70	Drawn / Date	Checked / Date	Approved / Date		
120-250	0.90	B.Zhang	07-15-02	JJH / 07-15-02		
250-500	1.20	07-15-02				

NOTES:

RATING:

UL, CSA: 20A 125V AC/16A 250V AC

VDE, CCC: 16A 250V AC APPROVALS: UL, CSA, VDE, CCC PANEL THICKNESS: 1.5mm

IEC 60320 C20 RoHS COMPLIANT

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for AC Power Entry Modules category:

Click to view products by Qualtek manufacturer:

Other Similar products are found below:

0098.0050 6167.0002 6609100-2 7-6609955-2 FKI2-50-6/M5 FN361-6-06 FN389-4-22 FN9226B-6-02 FN9233S1-10-06 FN9233S1-8-06 FN9233S1B-8-06 FN9233S1R-1-06 FN9233S1R-12-06 FN9233SB-1-06 FN9233SB-12-06 FN9233SB-8-06 FN9233SR-10-06 FN9244B-15-06HI FN9244EB-3-06 FN9244EB-8-06 FN9244ER-15-06 FN9244ER-8-06 FN9244ES1-8-06 FN9244ESB-8-06 FN924ESB-8-06 FN924ESB