

QAT




**ANTI-TRACKING INSULATION TUBING , UP TO 36kV
HALOGEN FREE, MEDIUM WALL
SHRINK RATIO 2.5:1**

Features/Applications

Made from specially formulated radiation cross-linked polyolefin compounds. The high creep resistance and anti-tracking properties of the products provide insulation protection for cable terminals, load break switches, power circuit breakers, etc.

- Operating temperature: -55°C to +105°C
- Minimum shrink temperature: 110°C
- Full recovery temperature: 110°C
- RoHS Compliant
- Halogen free
- Tracking resistant

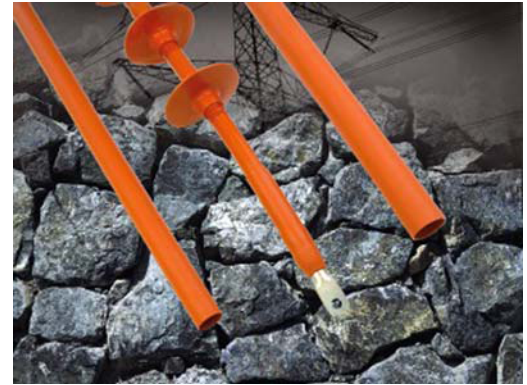

Technical Data

Property	Test Method	Typical Data
Tensile Strength	ASTM D 2671	11 MPa
Elongation at Break	ASTM D 2671	≥ 400%
Longitudinal Shrinkage	ASTM D 2671	0 to -10%
Tensile Strength After Aging (120°C, 168 hrs.)	ASTM D 2671	≥ 10MPa
Elongation at Break After Aging (120°C, 168 hrs.)	ASTM D 2671	≥ 350%
Dielectric Strength	IEC 243	≥ 15kV / mm
Tracking Resistance	ASTM D 2303	3.75kV, 1hr., Pass
Dielectric Constant	IEC 250	3.0 (max.)
Volume Resistance	ASTM D 2303	≥ 10 ¹³ Ω.cm
Flammability (Oxygen Index)	IEC 93	≥ 25
Copper Corrosion (120°C, 168 hrs.)	ASTM D 2671	No corrosion
Cold Bend (-40°C, 4 hrs.)	ASTM D 2671	No cracking

Product Dimensions

Size (mm)	As Supplied (mm)		After Recovered (mm)		Tubing Shape	Standard Spool *(SS) (Meter)
	Inside Diameter (min.)	Outside Diameter (min.)	Inside Diameter (max.)	Wall Thickness (min)		
Continuous Length Tubing						
19/6	19	19	6	2.5	Flat	15
30/10	30	30	10	2.8	Flat	15
35/12	35	35	12	2.8	Flat	15
40/16	40	40	16	2.9	Flat	15
45/18	45	45	18	3.0	Flat	15
54/24	54	54	24	3.0	Flat	15
60/29	60	60	29	3.0	Flat	15
76/38	76	76	38	3.0	Flat	15
100/49	100	100	49	3.0	Flat	15
Cut Length Tubing						Standard Length (Inch)
35/10	35	35	10	3.0	Round	48
40/12	40	40	12	3.0	Round	48
49/16	49	49	16	3.0	Round	48
55/18	55	55	18	3.0	Round	48
65/21	65	65	21	3.3	Round	48
75/25	75	75	25	3.5	Round	48
85/29	85	85	29	3.5	Round	48
100/38	100	100	38	4.0	Round	48
130/50	130	130	50	4.0	Round	48

Notes:

1. * See Part Number Guide for standard packaging codes.
2. Special sizes, packaging, colors and cut pieces are available upon request.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Heat Shrink Tubing and Sleeves](#) category:

Click to view products by [Qualtek](#) manufacturer:

Other Similar products are found below :

[5685710001](#) [CR9960-000](#) [5734012004](#) [607381P039](#) [611112-000](#) [6284592002](#) [CX4711-000](#) [CZ1420-000](#) [D-306-38](#) [770-006S302](#) [770-010Y106W1](#) [770-018S103](#) [770-018S202W1](#) [770-018S205W1](#) [770-020S704W1](#) [770-020S705](#) [MFP-3/64"-Clear](#) [790-3012](#) [MHHT-4-15K2-G-104](#) [8003012003](#) [MIL-LT-1-1/2-4-SP](#) [MIL-LT-1-1/2-9-STK](#) [MIL-LT-1/2-2-STK](#) [MIL-LT-3-0-SP](#) [MIL-LT-3/32-0-SP](#) [MIL-LT-3/32-6-SP](#) [MIL-LT-3/4-4-STK](#) [MIL-LT-3/4-6-SP](#) [839602-000](#) [8423-6](#) [FP301-116-48"-Clear](#) [FP301-12-6"-Clear](#) [FP301-1/4-48"-White-Hdr](#) [FP301-18-48"-Black-Hdr](#) [FP301-1/8-6"-Black](#) [FP301-18-6"-Black-Bulk](#) [FP301-316-48"-Blue-Hdr](#) [912229N002](#) [R280637030](#) [HDCW-5515-1000](#) [HDT-0300-48A-BLACK](#) [HDT-0400-48A-Black](#) [HDT-0800-48A-RED](#) [HDT1100-48A-BLK](#) [HDT1500-48A-BLK](#) [HDT-2000-48A-Black](#) [RHW-70/20-1200/ADH-0](#) [DWP-125-0.450-4-55MM-CS879](#) [156082-000](#) [MT5500-3/8-X-SP](#)