


**Features:**

- Universal AC input/ Full range
- Built-in active PFC function, PF>0.96
- Built-in Fan Speed Control
- Built-in AC Inrush Current Limiting Circuit (<20A)
- Built-in Constant Current Limiting Circuit
- Built-in Remote Sense Function
- High Efficiency, and High Reliability
- Output Protections: OLP/OVP/OTP/SCP
- 1U Low Profile, 41mm
- 100% full load burn-in test




Model	QPDF-480-12	QPDF-480-24	QPDF-480-27	QPDF-480-36	QPDF-480-48
Output Characteristics					
DC Output	12V	24V	27V	36V	48V
Rated Current	34A	22A	18A	14A	11A
Current Range	0~34A	0~22A	0~18A	0~14A	0~11A
Ripple and Noise	0~70°C	<120mV	<150mV	<150mV	<200mV
	-30~0°C	<180mV	<150mV	<150mV	<200mV
Voltage ADJ. Range	-5% ~ +10% of rated output voltage				
Voltage Accuracy	±2.0%	±2.0%	±2.0%	±2.0%	±2.0%
Line Regulation	±0.5%	±0.5%	±0.5%	±0.5%	±0.2%
Load Regulation	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%
Set-up Time	<1.5s (230VAC input, full load), <3s (115VAC input, full load)				
Hold-up Time	>16ms (230VAC input, full load)				
Temperature Coefficient	±0.05%/°C				
Overshoot and Undershoot	<5.0%				
Input Characteristics					
Voltage Range	90VAC~264VAC, 127VDC~370VDC				
Frequency Range	47Hz-63Hz				
Power Factor (Typical)	PF>0.98/115VAC PF>0.96/230VAC				
Efficiency (Typical)	88%	89%	89%	90%	90%
AC Current (max)	<9.0A				
Inrush Current (Typical)	<20A@230VAC Cold start				
Leakage Current	Input-Output: ≤0.25mA Input-PG: ≤3.50mA				
Protection					
Over Load (OLP)	110%~135% of rated output current, constant current, auto recovery				
Over Temperature (OTP)	105°C ± 5°C (detect on mosfet); shut down, auto recovery after the temperature decreases to 75°C				
Over Voltage (OVP)	110%~150% of rated output voltage, constant voltage, auto recovery				
Short Circuit (SCP)	Long-term mode, constant current, auto recovery				
Environmental Characteristics					
Operating Amb. Temp. & Hum	-30°C~70°C; 20%~90% RH Non-Condensing				
Storage Temp. & Hum	-40°C~85°C; 10%~95% RH Non-Condensing				
Safety Standards	IEC 60950-1:2005 (2nd Ed); UL60950-1 2nd Ed; EN60950-1: 2006				
Withstand Voltage	Primary-Secondary: 3.0KVAC;≤10mA. Primary-PG: 1.5KVAC;≤10mA. Secondary-PG: 0.5KVDC;≤10mA				
Isolation Resistance	≥100M ohms				
EMI Conduction & Radiation	Compliance to EN55022, Class B				
Harmonic Current	Compliance to EN61000-3-2, Class D				
EMS Immunity	Compliance to EN61000-4-2, 3, 4, 5, 6, 8, 11; ENV50204, heavy industry level				
General Characteristics					
MTBF (MIL-HDBK-217F)	More than 200,000Hrs (25°C, Full load)				
Dimension (LxWxH)	218x116.5x41mm				
Packing	6PCS/CTN. G.W: 8.7kgs				
Cooling Method	Forced air cooling (built-in DC fan)				


MECHANICAL SPECIFICATIONS

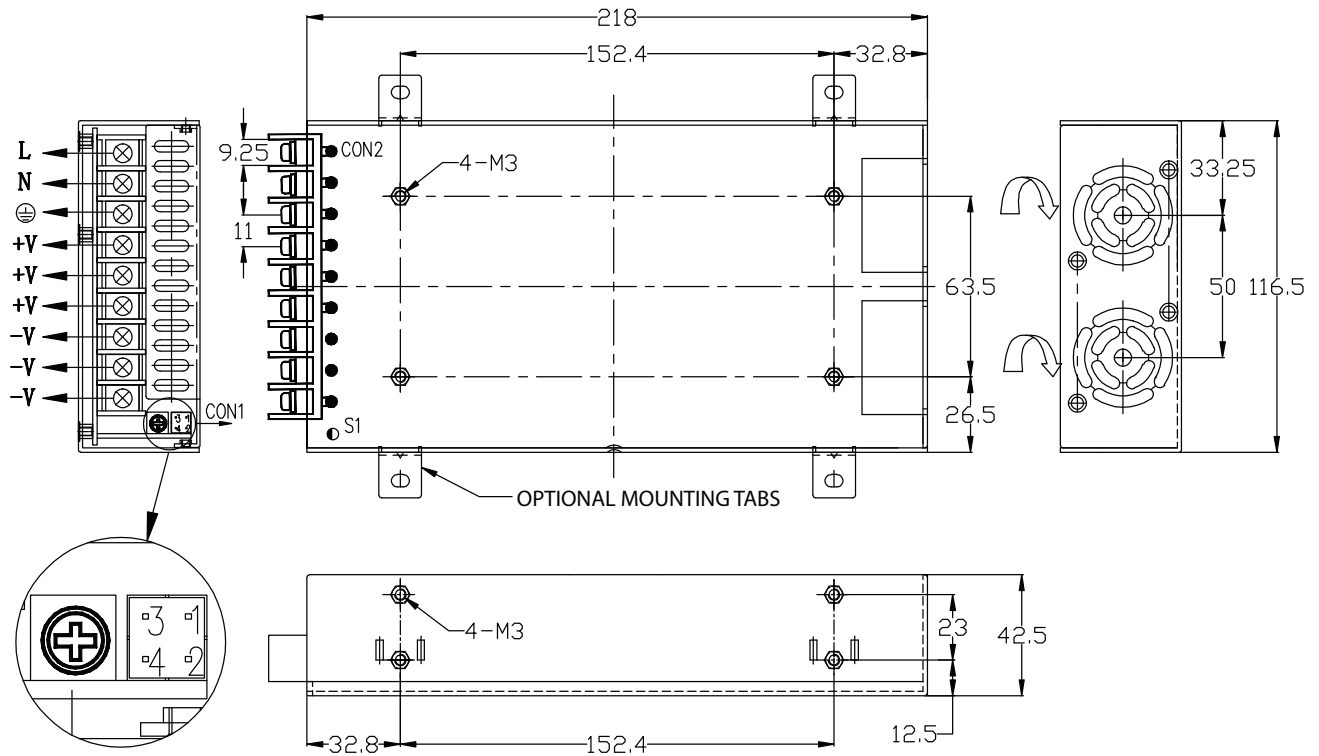

Pin No.	Assignment	Mating Housing	Terminal
1	+S (Remote Sense)	HRS DF11-4DS or equivalent	HRS DF11-**SC or equivalent
2	-S (Remote Sense)		
3	DC-OK		
4	GND		

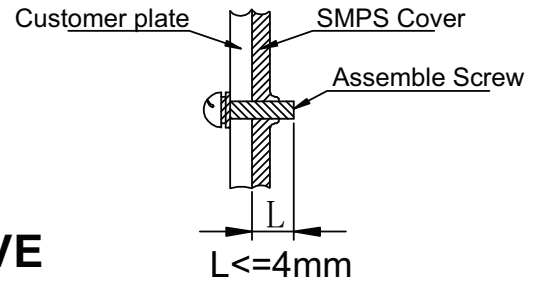

DERATING CURVE

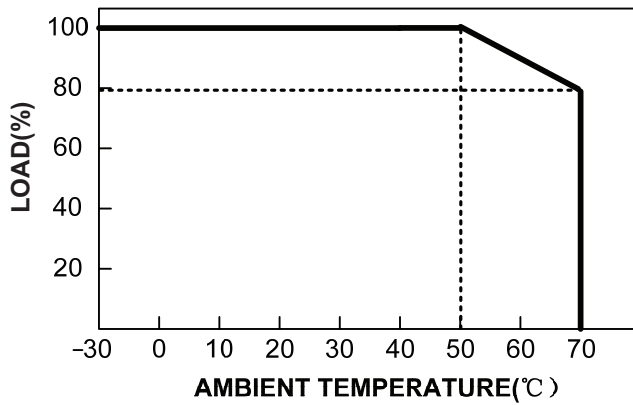

UNIT: mm

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Switching Power Supplies](#) category:

Click to view products by [Qualtek](#) manufacturer:

Other Similar products are found below :

[70841011](#) [73-551-0005](#) [73-551-0048](#) [PS3E-B12F](#) [PS3E-E12F](#) [AAD600S-4-OP](#) [R22095](#) [KD0204](#) [9021](#) [LDIN100150](#) [LPM000-BBAR-01](#)
[LPX17S-C](#) [EVS57-10R6/R](#) [FP80](#) [FRV7000G](#) [22929](#) [PS3E-F12F](#) [CQM1IA121](#) [40370121900](#) [VI-PU22-EXX](#) [40370121910](#) [LDIN5075](#)
[LPM615-CHAS](#) [LPX140-C](#) [09-160CFG](#) [70841025](#) [VPX3000-CBL-DC](#) [LPM000-BBAR-05](#) [LPM000-BBAR-08](#) [LPM124-OUTA1-48](#)
[LPM000-BBAR-07](#) [LPM109-OUTA1-10](#) [LPM616-CHAS](#) [08-30466-1055G](#) [08-30466-2175G](#) [08-30466-2125G](#) [DMB-EWG](#) [TVQF-1219-](#)
[18S](#) [6504-226-2101](#) [CQM1IPS01](#) [SP-300-5](#) [CQM1-IPS02](#) [VI-MUL-ES](#) [22829](#) [08-30466-0065G](#) [VI-RU031-EWWX](#) [08-30466-0028G](#) [VI-](#)
[LUL-EU](#) [EP3000AC48INZ](#) [VP-C2104853](#)