


# AP2080K

## N-Channel Power MOSFET


- ▼ Capable of 2.5V Gate Drive
- ▼ Small Size & Ultra\_Low  $R_{DS(ON)}$
- ▼ RoHS Compliant & Halogen-Free



$BV_{DSS}$	20V
$R_{DS(ON)}$	8.5m $\Omega$
$I_D^3$	50A

### Description

AP2080K series are from Advanced Power innovated design and silicon process technology to achieve the lowest possible on-resistance and fast switching performance. It provides the designer with an extreme efficient device for use in a wide range of power applications.



### Absolute Maximum Ratings@ $T_j=25^\circ\text{C}$ (unless otherwise specified)

Symbol	Parameter	Rating	Units
$V_{DS}$	Drain-Source Voltage	20	V
$V_{GS}$	Gate-Source Voltage	$\pm 12$	V
$I_D@T_A=25^\circ\text{C}$	Drain Current, $V_{GS} @ 4.5V^3$	50	A
$I_D@T_A=70^\circ\text{C}$	Drain Current, $V_{GS} @ 4.5V^3$	45	A
$I_{DM}$	Pulsed Drain Current <sup>1</sup>	35	A
$P_D@T_A=25^\circ\text{C}$	Total Power Dissipation	3.13	W
$T_{STG}$	Storage Temperature Range	-55 to 150	$^\circ\text{C}$
$T_J$	Operating Junction Temperature Range	-55 to 150	$^\circ\text{C}$

### Thermal Data

Symbol	Parameter	Value	Unit
Rthj-c	Maximum Thermal Resistance, Junction-case	5	$^\circ\text{C}/\text{W}$
Rthj-a	Maximum Thermal Resistance, Junction-ambient <sup>3</sup>	40	$^\circ\text{C}/\text{W}$

### N-Channel Power MOSFET

### Electrical Characteristics@T<sub>j</sub>=25°C(unless otherwise specified)


Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Units
BV <sub>DSS</sub>	Drain-Source Breakdown Voltage	V <sub>GS</sub> =0V, I <sub>D</sub> =250uA	20	-	-	V
R <sub>DS(ON)</sub>	Static Drain-Source On-Resistance <sup>2</sup>	V <sub>GS</sub> =4.5V, I <sub>D</sub> =20A	-	8.5	9.8	mΩ
		V <sub>GS</sub> =2.5V, I <sub>F</sub> =12A	-	-	14	mΩ
V <sub>GS(th)</sub>	Gate Threshold Voltage	V <sub>DS</sub> =V <sub>GS</sub> , I <sub>D</sub> =1mA	0.6	-	0.9	V
g <sub>fs</sub>	Forward Transconductance	V <sub>DS</sub> =5V, I <sub>D</sub> =20A	-	130	-	S
I <sub>DSS</sub>	Drain-Source Leakage Current	V <sub>DS</sub> =16V, V <sub>GS</sub> =0V	-	-	10	uA
I <sub>GSS</sub>	Gate-Source Leakage	V <sub>GS</sub> =±12V, V <sub>DS</sub> =0V	-	-	±100	nA
Q <sub>g</sub>	Total Gate Charge	I <sub>D</sub> =20A	-	62	99.2	nC
Q <sub>gs</sub>	Gate-Source Charge	V <sub>DS</sub> =10V	-	4	-	nC
Q <sub>gd</sub>	Gate-Drain ("Miller") Charge	V <sub>GS</sub> =4.5V	-	21	-	nC
t <sub>d(on)</sub>	Turn-on Delay Time	V <sub>DS</sub> =10V	-	12	-	ns
t <sub>r</sub>	Rise Time	I <sub>D</sub> =1A	-	20	-	ns
t <sub>d(off)</sub>	Turn-off Delay Time	R <sub>G</sub> =3.3Ω	-	100	-	ns
t <sub>f</sub>	Fall Time	V <sub>GS</sub> =5V	-	80	-	ns
C <sub>iss</sub>	Input Capacitance	V <sub>GS</sub> =0V	-	4000	6400	pF
C <sub>oss</sub>	Output Capacitance	V <sub>DS</sub> =10V	-	780	-	pF
C <sub>rss</sub>	Reverse Transfer Capacitance	f=1.0MHz	-	625	-	pF
R <sub>g</sub>	Gate Resistance	f=1.0MHz	-	1.4	2.8	Ω

### Source-Drain Diode


Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Units
V <sub>SD</sub>	Forward On Voltage <sup>2</sup>	I <sub>S</sub> =2.5A, V <sub>GS</sub> =0V	-	-	1.2	V
t <sub>rr</sub>	Reverse Recovery Time	I <sub>S</sub> =20A, V <sub>GS</sub> =0V,	-	43	-	ns
Q <sub>rr</sub>	Reverse Recovery Charge	di/dt=100A/μs	-	26	-	nC

### Notes:


- 1.Pulse width limited by Max. junction temperature.
- 2.Pulse test
- 3.Surface mounted on 1 in<sup>2</sup> 2oz copper pad of FR4 board, t ≤10sec; 135°C/W when mounted on min. copper pad.
- 4.Maximum current limited by package.

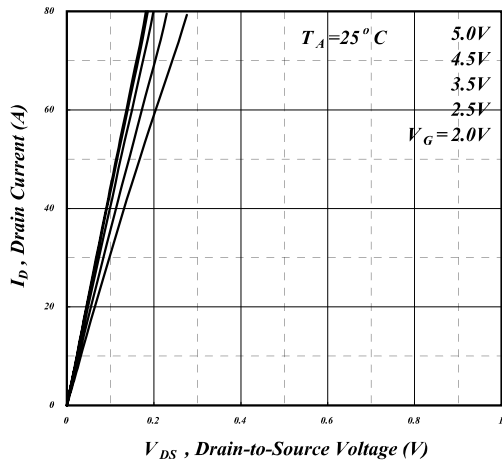


**Fig 1. Typical Output Characteristics**

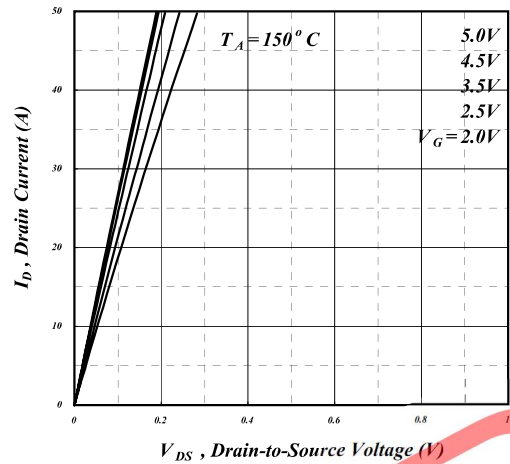


**Fig 2. Typical Output Characteristics**

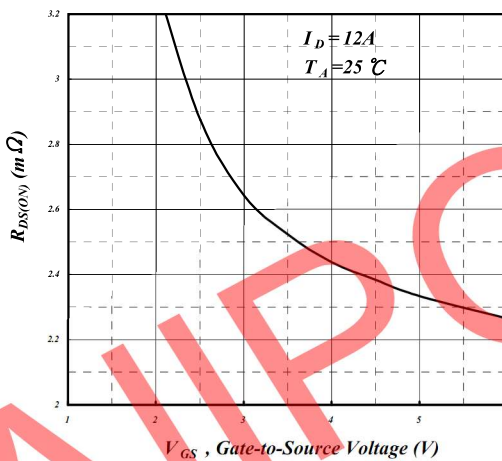


**Fig 3. On-Resistance v.s. Gate Voltage**

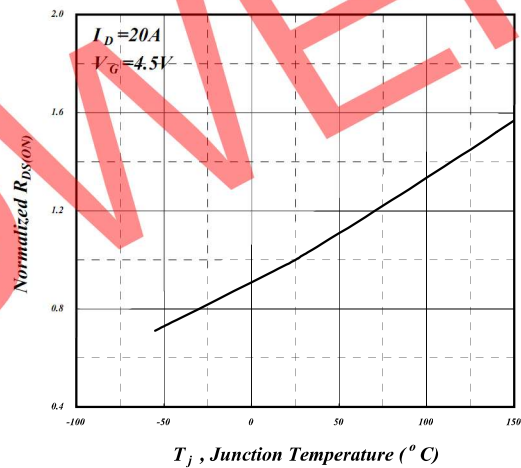


**Fig 4. Normalized On-Resistance v.s. Junction Temperature**

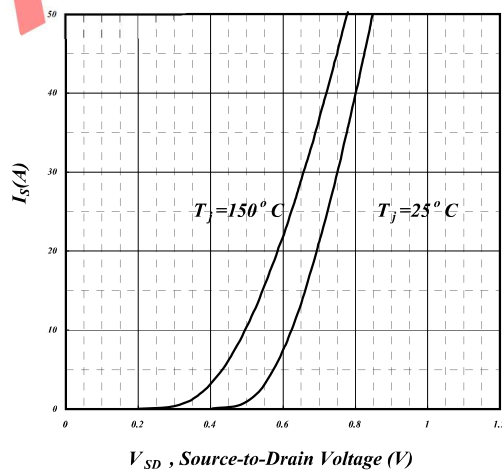


**Fig 5. Forward Characteristic of Reverse Diode**

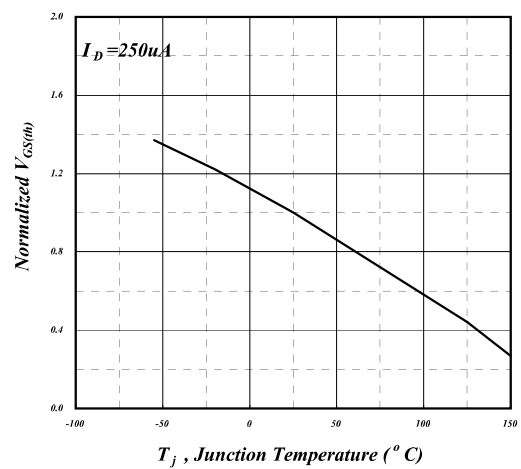


**Fig 6. Gate Threshold Voltage v.s. Junction Temperature**

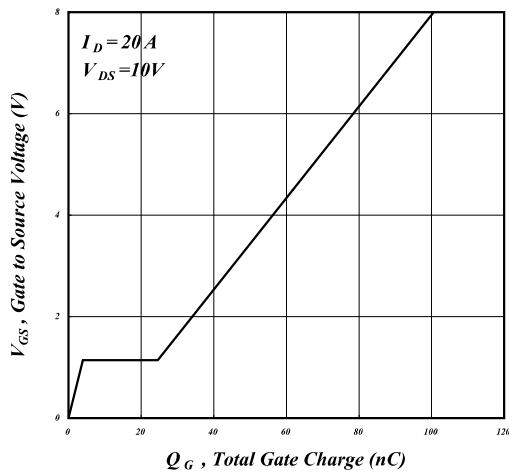


**Fig 7. Gate Charge Characteristics**

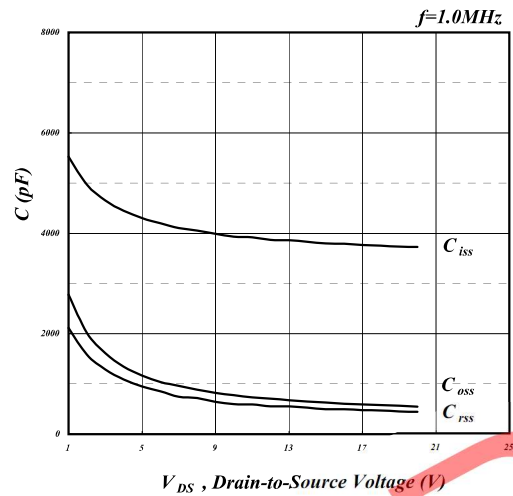


**Fig 8. Typical Capacitance Characteristics**

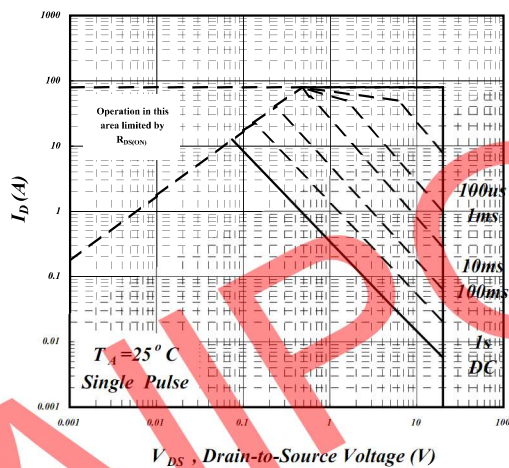


**Fig 9. Maximum Safe Operating Area**

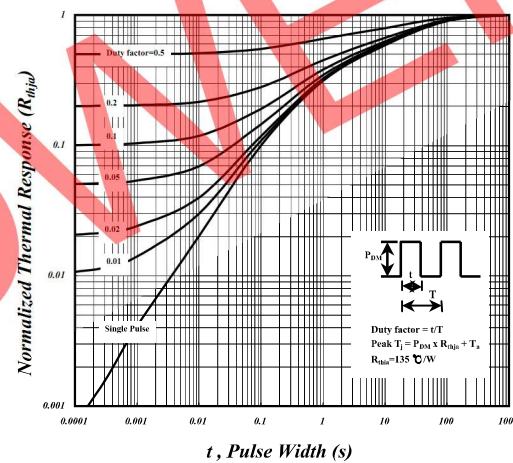


**Fig 10. Effective Transient Thermal Impedance**

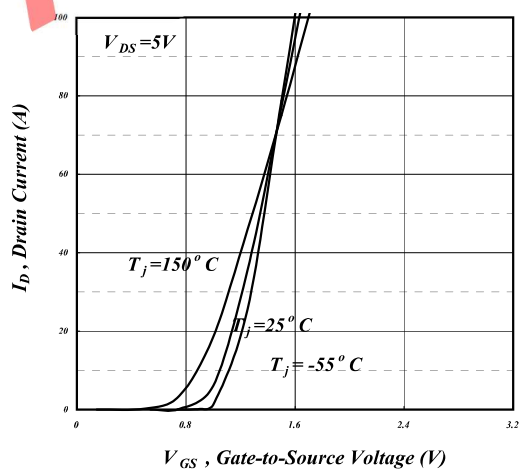


**Fig 11. Transfer Characteristics**

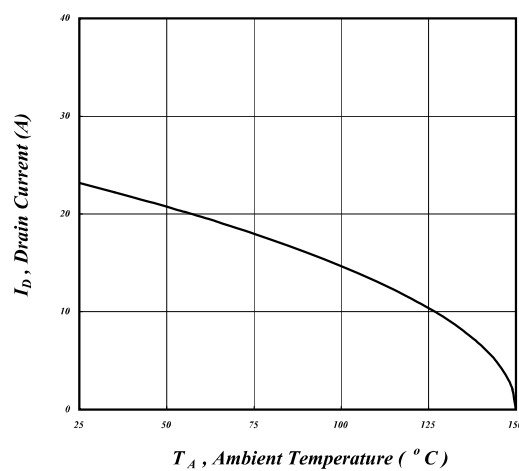

**Fig 12. Drain Current v.s. Ambient Temperature**

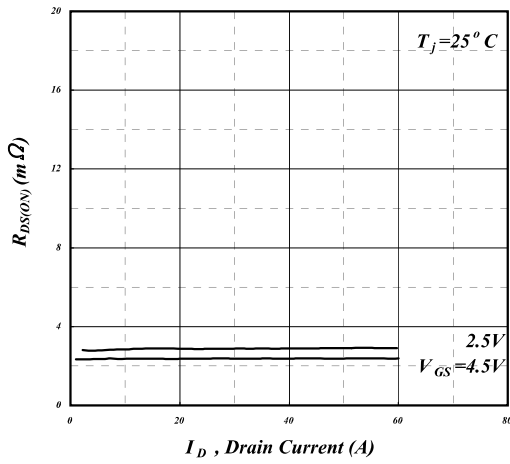

**Fig 13. Typ. Drain-Source on State Resistance**

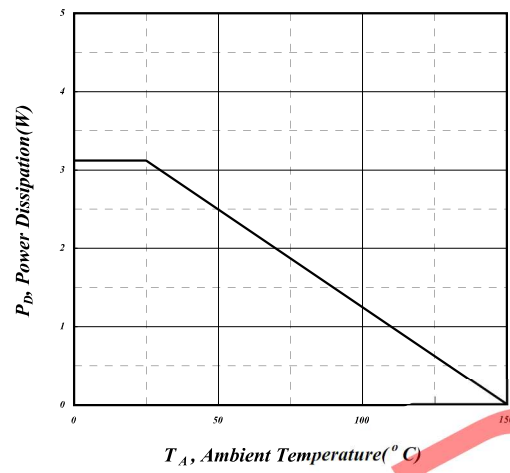


**Fig 14. Total Power Dissipation**

AIPPOWER

**AP2080****N-Channel Power MOSFET****MARKING INFORMATION**

TO-252

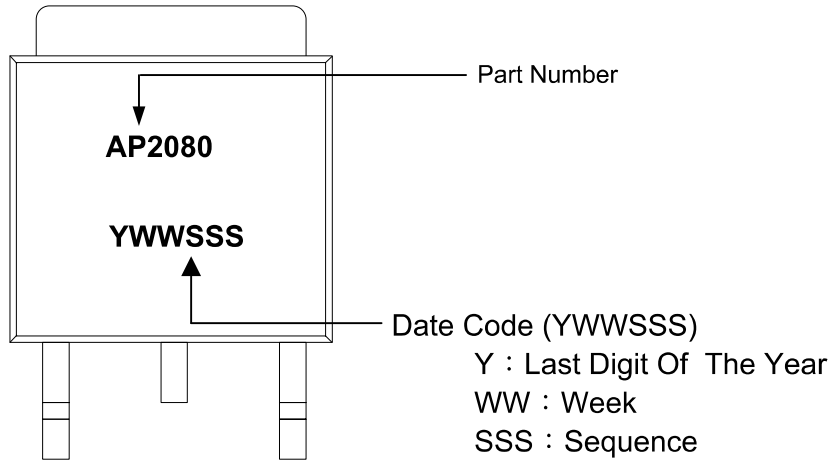**AIPOWER**

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [MOSFET](#) category:*

*Click to view products by [Quan Li](#) manufacturer:*

Other Similar products are found below :

[MCH3443-TL-E](#) [MCH6422-TL-E](#) [NTNS3A92PZT5G](#) [IRFD120](#) [JANTX2N5237](#) [2N7000](#) [2SK2464-TL-E](#) [2SJ277-DL-E](#) [2SK2267\(Q\)](#)  
[2SK2545\(Q,T\)](#) [405094E](#) [423220D](#) [MIC4420CM-TR](#) [VN1206L](#) [614234A](#) [715780A](#) [SSM6J414TU,LF\(T](#) [751625C](#) [IRS2092STRPBF-EL](#)  
[IPS70R2K0CEAKMA1](#) [BSF024N03LT3 G](#) [PSMN4R2-30MLD](#) [TK31J60W5,S1VQ\(O](#) [2SK2614\(TE16L1,Q\)](#) [DMN1017UCP3-7](#)  
[EFC2J004NUZTDG](#) [P85W28HP2F-7071](#) [DMN1053UCP4-7](#) [SQJ469EP-T1-GE3](#) [NTE2384](#) [NTE6400A](#) [DMC2700UDMQ-7](#)  
[DMN2080UCB4-7](#) [DMN61D9UWQ-13](#) [US6M2GTR](#) [DMN31D5UDJ-7](#) [SSM6P54TU,LF](#) [DMP22D4UFO-7B](#) [IPS60R3K4CEAKMA1](#)  
[DMN1006UCA6-7](#) [DMN16M9UCA6-7](#) [STF5N65M6](#) [IRF40H233XTMA1](#) [IPSA70R950CEAKMA1](#) [IPSA70R2K0CEAKMA1](#) [STU5N65M6](#)  
[C3M0021120D](#) [DMN6022SSD-13](#) [DMN13M9UCA6-7](#) [MCQ4828A-TP](#)