

**描述 / Descriptions**

SOT23-3 塑封封装 P 道 MOS 场效应管。P- CHANNEL MOSFET in a SOT23-3 Plastic Package.

**特征 / Features**

$V_{DS}$  (V) = -30V

$I_D$  = -4.1 A



$R_{DS(ON)} < 60m\Omega$  ( $V_{GS} = -10V$ )

$R_{DS(ON)} < 87m\Omega$  ( $V_{GS} = -4.5V$ )

**用途 / Applications**

适用于作负载开关或脉宽调制应用。

This device is suitable for use as a load switch or in PWM applications.

**内部等效电路 / Equivalent Circuit****引脚排列 / Pinning**

PIN1 : S

PIN 2 : G

PIN 3 : D

**印章代码 / Marking**

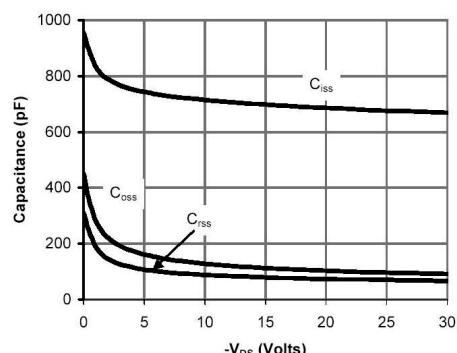
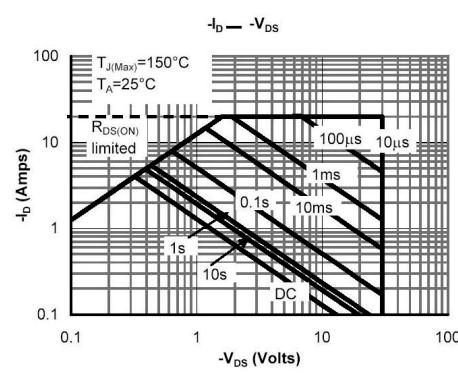
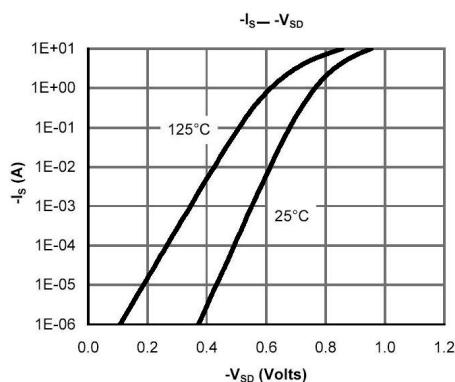
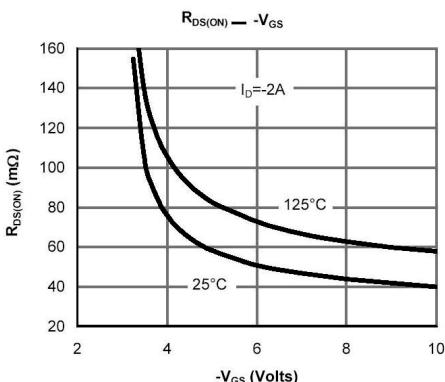
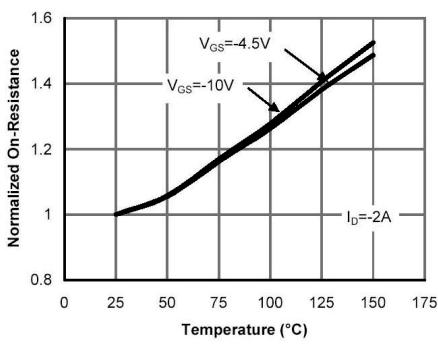
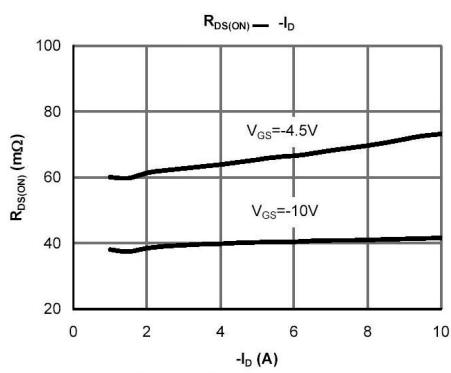
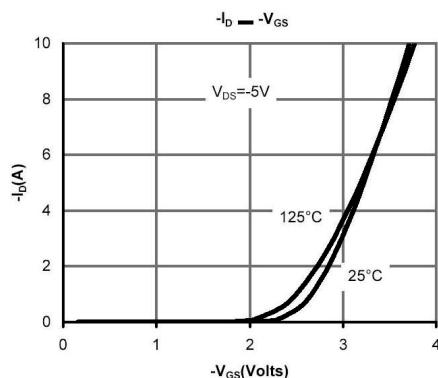
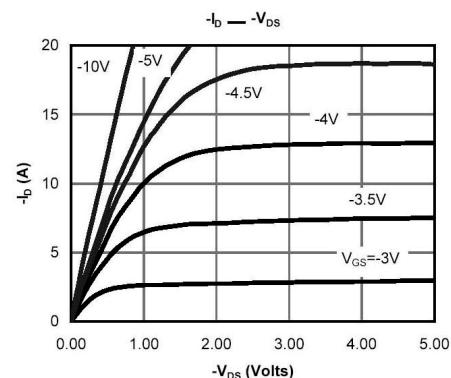
Marking	A7H
---------	-----

## 极限参数 / Absolute Maximum Ratings(Ta=25°C)

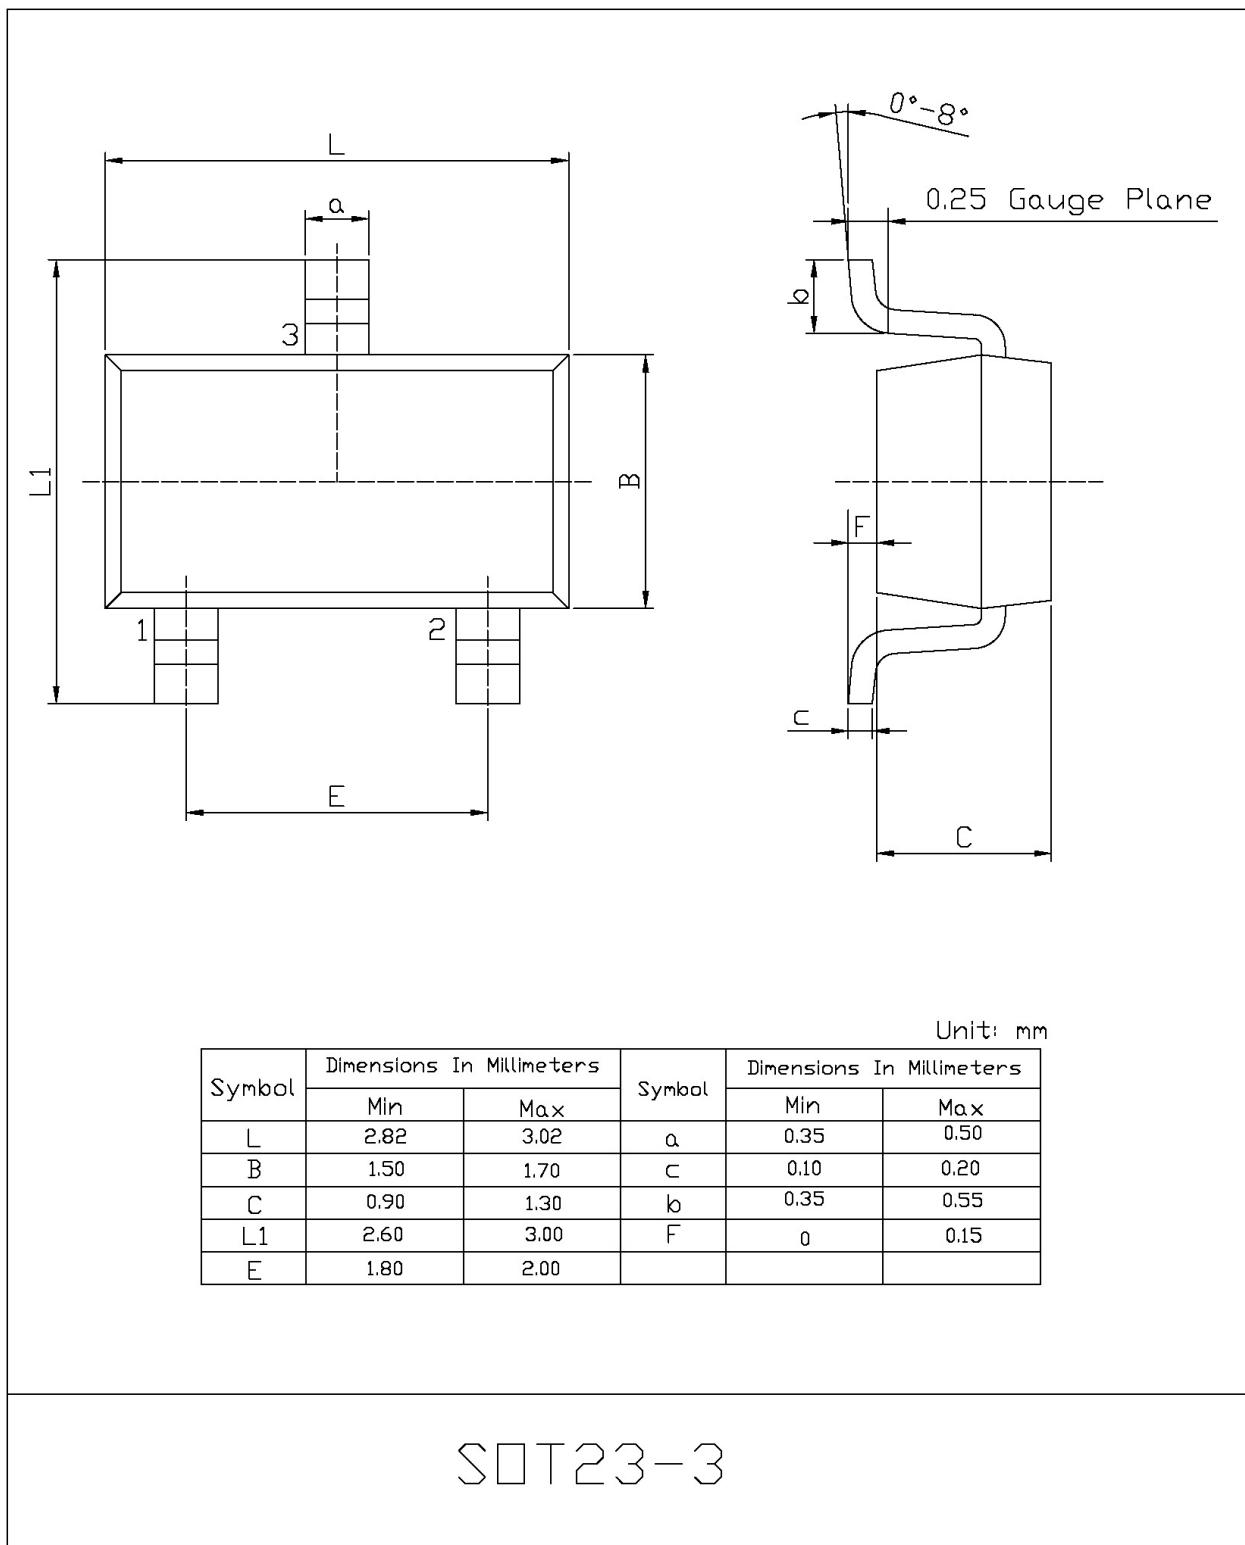
参数 Parameter	符号 Symbol	数值 Rating	单位 Unit
Drain-Source Voltage	V <sub>DS</sub>	-30	V
Drain Current – Continuous	I <sub>D</sub>	-4.1	A
Drain Current- Continuous	I <sub>D</sub> (T <sub>a</sub> =70°C)	-3.5	A
Pulsed Drain Current	I <sub>DM</sub>	-20	A
Gate-Source Voltage	V <sub>GS</sub>	±20	V
Total Power Dissipation	P <sub>D</sub>	1.4	W
Total Power Dissipation	P <sub>D</sub> (T <sub>a</sub> =70°C)	1.0	W
Operating and Storage Junction Temperature Range	T <sub>J</sub> , T <sub>STG</sub>	-55 to 150	°C

## 电性能参数 / Electrical Characteristics(Ta=25°C)

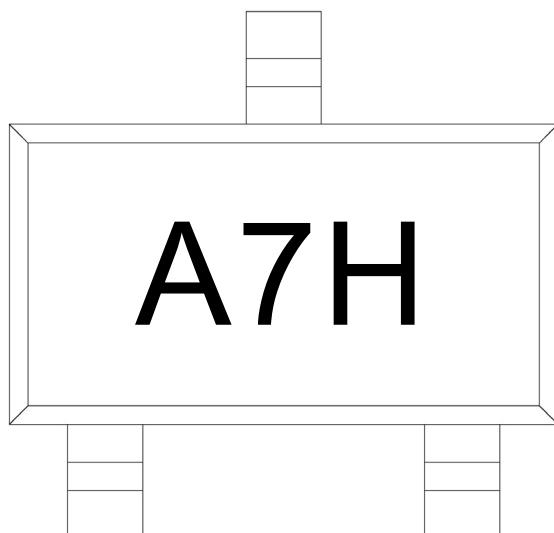
参数 Parameter	符号 Symbol	测试条件 Test Conditions	最小值 Min	典型值 Typ	最大值 Max	单位 Unit
Drain–Source Breakdown Voltage	BV <sub>DSS</sub>	V <sub>GS</sub> =0V I <sub>D</sub> =-250μA	-30			V
Zero Gate Voltage Drain Current	I <sub>DSS</sub>	V <sub>DS</sub> =-24V V <sub>GS</sub> =0V			-1	μA
		V <sub>DS</sub> =-24V V <sub>GS</sub> =0V T <sub>J</sub> =55°C			-5	μA
Gate–Body Leakage.	I <sub>GSS</sub>	V <sub>GS</sub> =±20V V <sub>DS</sub> =0V			±0.1	μA
On–State Drain Current	I <sub>D(on)</sub>	V <sub>GS</sub> =-4.5V V <sub>DS</sub> =-5V	-10			A
Gate Threshold Voltage	V <sub>GS(th)</sub>	V <sub>DS</sub> =V <sub>GS</sub> I <sub>D</sub> =-250μA	-1	-1.4	-3	V
Static Drain–Source On–Resistance	R <sub>DS(on)1</sub>	V <sub>GS</sub> =-10V I <sub>D</sub> =-4.1A		54	60	mΩ
	R <sub>DS(on)2</sub>	V <sub>GS</sub> =-10V I <sub>D</sub> =-4.1A T <sub>J</sub> =125°C		57	73	
	R <sub>DS(on)3</sub>	V <sub>GS</sub> =-4.5V I <sub>D</sub> =-3A		80	95	
Forward Transconductance	g <sub>FS</sub>	V <sub>DS</sub> =-5V I <sub>D</sub> =-4A	5.5	8.2		S
Drain–Source Diode Forward Voltage	V <sub>SD</sub>	V <sub>GS</sub> =0V I <sub>S</sub> =-1A		-0.77	-1	V
Input Capacitance	C <sub>iss</sub>	V <sub>DS</sub> =-15V V <sub>GS</sub> =0V f=1MHz		700		pF
Output Capacitance	C <sub>oss</sub>			120		
Reverse Transfer Capacitance	C <sub>rss</sub>			75		
Turn–On Delay Time	t <sub>d(on)</sub>	V <sub>GS</sub> =-10V R <sub>L</sub> =3.6Ω V <sub>DS</sub> =-15V R <sub>GEN</sub> =3Ω		8.6		ns
Turn–On Rise Time	t <sub>r</sub>			5		
Turn–Off Delay Time	t <sub>d(off)</sub>			28.2		
Turn–Off Fall Time	t <sub>f</sub>			13.5		

**电参数曲线图 / Electrical Characteristic Curve**


外形尺寸图 / Package Dimensions



**印章说明 / Marking Instructions**



**说明 :**

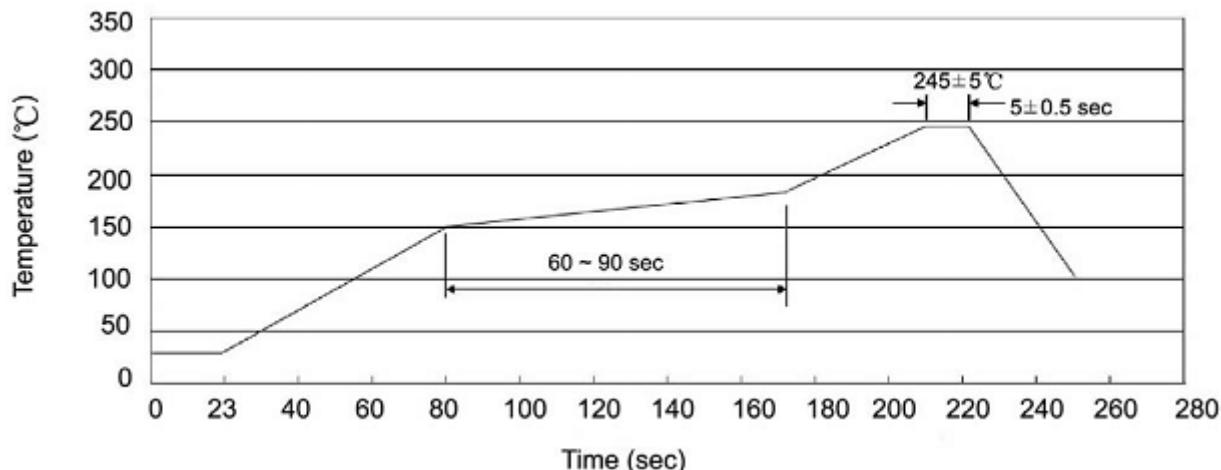
A7 : 为型号代码

H : 为公司代码

Note:

A7: Product Type.

H: Company Code.

**回流焊温度曲线图(无铅) / Temperature Profile for IR Reflow Soldering(Pb-Free)**
**说明 :**

- 1、预热温度 25 ~ 150°C , 时间 60 ~ 90sec;
- 2、峰值温度 245±5°C , 时间持续为 5±0.5sec;
- 3、焊接制程冷却速度为 2 ~ 10°C/sec.

**Note:**

- 1.Preheating:25~150°C, Time:60~90sec.
- 2.Peak Temp.:245±5°C, Duration:5±0.5sec.
3. Cooling Speed: 2~10°C/sec.

**耐焊接热试验条件 / Resistance to Soldering Heat Test Conditions**

温度 : 260±5°C      时间 : 10±1 sec.      Temp.:260±5°C      Time:10±1 sec

**包装规格 / Packaging SPEC.**
**卷盘包装 / REEL**

Package Type 封装形式	Units 包装数量					Dimension 包装尺寸 (unit: mm <sup>3</sup> )		
	Units/Reel 只/卷盘	Reels/Inner Box 卷盘/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Reel	Inner Box 盒	Outer Box 箱
SOT-23-3	3,000	10	30,000	4	120,000	7" ×8	210×205×205	445×230×435

**使用说明 / Notices**

# X-ON Electronics

Largest Supplier of Electrical and Electronic Components

***Click to view similar products for MOSFET category:***

***Click to view products by Quan Li manufacturer:***

Other Similar products are found below :

[614233C](#) [648584F](#) [MCH3443-TL-E](#) [MCH6422-TL-E](#) [FDPF9N50NZ](#) [FW231A-TL-E](#) [APT5010JVR](#) [NTNS3A92PZT5G](#) [IRF100S201](#)  
[JANTX2N5237](#) [2SK2464-TL-E](#) [2SK3818-DL-E](#) [FCA20N60\\_F109](#) [FDZ595PZ](#) [STD6600NT4G](#) [FSS804-TL-E](#) [2SJ277-DL-E](#) [2SK1691-DL-](#)  
[E](#) [2SK2545\(Q,T\)](#) [D2294UK](#) [405094E](#) [423220D](#) [MCH6646-TL-E](#) [TPCC8103,L1Q\(CM](#) [367-8430-0972-503](#) [VN1206L](#) [424134F](#) [026935X](#)  
[051075F](#) [SBVS138LT1G](#) [614234A](#) [715780A](#) [NTNS3166NZT5G](#) [751625C](#) [873612G](#) [IRF7380TRHR](#) [IPS70R2K0CEAKMA1](#)  
[RJK60S3DPP-E0#T2](#) [RJK60S5DPK-M0#T0](#) [APT5010JVFR](#) [APT12031JFLL](#) [APT12040JVR](#) [DMN3404LQ-7](#) [NTE6400](#) [JANTX2N6796U](#)  
[JANTX2N6784U](#) [JANTXV2N5416U4](#) [SQM110N05-06L-GE3](#) [SIHF35N60E-GE3](#) [2SK2614\(TE16L1,Q\)](#)