


Quectel BG77

Ultra-Compact

LTE Cat M1/Cat NB2 Module

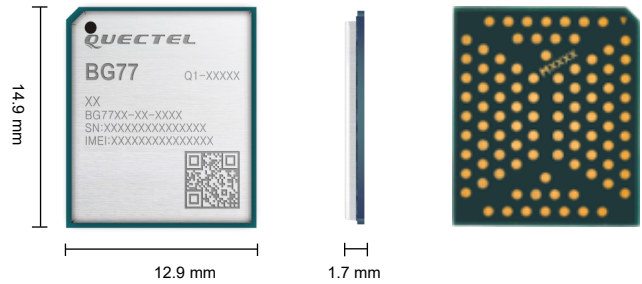

BG77 is an ultra-compact LPWA module supporting LTE Cat M1, LTE Cat NB2 and integrated GNSS. It is fully compliant with 3GPP Rel. 14 specification and provides maximum data rates of 588 kbps downlink and 1119 kbps uplink. It features ultra-low power consumption by leveraging the integrated RAM/flash as well as the ARM Cortex A7 processor supporting ThreadX, achieving up to 70% reduction in PSM leakage and 85% reduction in eDRX current consumption compared to its predecessor.

BG77 boasts a comprehensive set of hardware-based security features and enables trusted applications to run directly on the Cortex A7 TrustZone engine. With an ultra-compact SMT form factor of 14.9 mm × 12.9 mm × 1.7 mm and high integration level, it enables integrators and developers to easily design their applications and take advantage from the module's low power consumption and mechanical intensity. Its advanced LGA package allows fully automated manufacturing for high-volume applications.

A rich set of Internet protocols, industry-standard interfaces and abundant functionalities extend the applicability of the module to a wide range of M2M applications such as wireless POS, smart metering, tracking, wearable devices, etc.



Key Benefits

- ✓ Extremely compact LTE Cat M1/Cat NB2 module with ultra-low power consumption
- ✓ Integrated RAM and flash in baseband chipset
- ✓ Comprehensive set of hardware-based security features
- ✓ Super slim profile in LGA package
- ✓ Compact SMT form factor ideal for size-constrained applications with tight space
- ✓ Fast time-to-market: reference designs, evaluation tools and timely technical support minimize design-in time and development efforts
- ✓ Robust mounting and interfaces



LTE Cat M1 & Cat NB2



LGA Package



Super Compact Size



Embedded Abundant Protocols



DFOTA



USB 2.0 Interface



Ultra-low Power Consumption



Quectel Enhanced AT Commands



Integrated RAM/Flash in Chipset

Quectel BG77

Ultra-Compact LTE Cat M1/Cat NB2 Module

Variant for the Global

BG77

Cat M1:

LTE FDD: B1/B2/B3/B4/B5/B8/B12/B13/B14/
B18/B19/B20/B25/B26/B27/B28/B66/B85*

Cat NB2:

LTE FDD: B1/B2/B3/B4/B5/B8/B12/B13/B18/
B19/B20/B25/B26/B28/B66/B71/B85*

Data

Cat M1:

Max. 588 kbps (DL), Max. 1119 kbps (UL)

Cat NB2:

Max. 127 kbps (DL), Max. 158.5 kbps (UL)

Voice*

VoLTE (For Cat M1 Only)

SMS

Point-to-point MO and MT

SMS Cell Broadcast

Text and PDU Mode

Interfaces

USB 2.0 × 1

UART × 3

PCM* × 1

I2C* × 1

ADC × 2

(U)SIM × 1

GPIO × 7

GRFC × 2

NET_STATUS × 1 (For Network Status Indication)

STATUS × 1 (For Power ON/OFF Indication)

Antenna × 2 (For LTE & GNSS Antennas)

Enhanced Features

GNSS (Optional):

GPS/GLONASS/BeiDou/Galileo/QZSS

Firmware Upgrade:

via USB interface

DFOTA:

Delta Firmware Upgrade Over-the-Air

Processor:

ARM A7 Processor

QuecOpen®:

Simplify the Development of Embedded
Applications

QuecLocator®:

Support Cell ID Positioning

Electrical Characteristics

Output Power:

Max. Power: 21 dBm

Consumption @ LTE Cat M1 (Typical):

Power Saving Mode: 3.2 µA

Idle State: TBD

Sleep State:

1.63 mA @ DRX = 1.28 s

0.76 mA @ e-I-DRX = 81.92 s, PTW = 20.48 s

LTE Connected Mode:

228 mA @ 21dBm, GNSS off

Consumption @ LTE Cat NB1 (Typical):

Power Saving Mode: 3.2 µA

Idle State: TBD

Sleep State:

1.5 mA @ DRX = 1.28 s

0.79 mA @ e-I-DRX = 81.92 s, PTW = 20.48 s

LTE Connected Mode:

165 mA @ 21dBm, GNSS off

Software Features

USB Serial Driver*:

Windows 7/8/8.1/10,

Linux 2.6–5.4,

Android 4.x–9.x

GNSS/RIL Driver*:

Android 4.x–9.x

Protocols:

PPP/TCP/UDP/SSL/TLS/FTP(S)/HTTP(S)/NITZ/

PING/MQTT/LwM2M/CoAP/IPv6*

General Features

LGA Package

3GPP E-UTRA Release 14

Supply Voltage^①: 2.6–4.8 V, 3.3 V Typ.

Operation Temperature Range: -35 °C to +75 °C

Extended Temperature Range: -40 °C to +85 °C

Dimensions: 14.9 mm × 12.9 mm × 1.7 mm

3GPP TS27.007, 3GPP TS 27.005 and Quectel

Enhanced AT Commands

Approvals

Carrier:

Vodafone* (Global)

Sprint/Verizon*/AT&T*/T-Mobile* (North
America)

Telus* (Canada)

China Telecom*/China Mobile*/China Unicom*
(China)

SKT* (South Korea)

NTT DOCOMO*/SoftBank*/KDDI* (Japan)

Telstra* (Australia)

Regulatory:

GCF* (Global)

CE (Europe)

FCC/PTCRB* (North America)

IC* (Canada)

SRRC*/NAL*/CCC* (China)

KC* (South Korea)

NCC* (Taiwan, China)

JATE/TELEC (Japan)

RCM (Australia)

NBTC* (Thailand)

Others:

RoHS

* means development/on-going/planning.

① please refer to the hardware design
manual for more specific requirements
on the minimum power supply voltage.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Sub-GHz Modules](#) category:

Click to view products by [Quectel Wireless](#) manufacturer:

Other Similar products are found below :

[HMC-C024](#) [nRF24L01P-MODULE-SMA](#) [CMD-KEY2-418-CRE](#) [V640-A90](#) [SM1231E868](#) [HMC-C582](#) [SM-MN-00-HF-RC](#) [HMC-C031](#)
[LoRa Node Kit\(US\)](#) [Sierra HL7588 4G KIT\(US\)](#) [WISE-4610-S672NA](#) [EC21AUFA-MINIPCIE](#) [CS-EASYSWITCH-25](#) [EC21JFB-MINIPCIE](#)
[E28-2G4M27S](#) [E22-400T30D](#) [DL-RFM95-868M](#) [DL-RFM95-915M](#) [DL-RFM96-433M](#) [Ra-07H-V1.1](#) [Ra-07](#) [Ra-01SH](#) [Ra-01S-T](#) [Ra-01SH-](#)
[T](#) [CMD-HHCP-418-MD](#) [CMD-HHCP-433-MD](#) [CMD-HHLR-418-MD](#) [2095000000200](#) [XB9X-DMRS-031](#) [20911051101](#) [COM-13909](#)
[HMC-C033](#) [COM-13910](#) [WRL-14498](#) [SX1276RF1KAS](#) [HMC-C004](#) [HMC-C011](#) [HMC-C014](#) [HMC-C010](#) [HMC-C050](#) [HMC-C001](#) [HMC-](#)
[C006](#) [HMC-C029](#) [HMC-C030](#) [HMC-C021](#) [HMC-C041](#) [HMC-C042](#) [HMC-C048](#) [HMC-C051](#) [HMC-C071](#)