




Quectel EG21-G

IoT/M2M-optimized LTE Cat 1 Module

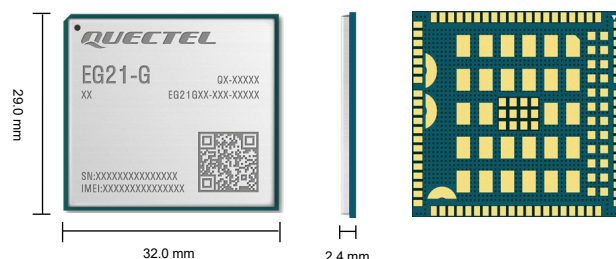

Quectel EG21-G is an LTE Cat 1 module optimized specially for M2M and IoT applications. Adopting the 3GPP Rel.11 LTE technology, it delivers maximum data rates up to 10 Mbps downlink and 5 Mbps uplink. Designed in the compact and unified form factor, EG21-G is compatible with Quectel UMTS/HSPA+ UC200T series module and multi-mode LTE Standard EC2x series (EC25 series, EC21 series and EC20-CE)/EC200A series/EG25-G modules, which allows for flexible migration among them in design and use.

EG21-G is backward-compatible with existing EDGE and GSM/GPRS networks, ensuring that it can be connected even in remote areas devoid of 4G or 3G coverage.

EG21-G supports Qualcomm® IZat™ location technology Gen8C Lite (GPS, GLONASS, BDS, Galileo and QZSS). The integrated GNSS greatly simplifies product design, and provides quicker, more accurate and more dependable positioning.

A rich set of Internet protocols, industry-standard interfaces and abundant functionalities (USB serial drivers for Windows 7/8/8.1/10, Linux, Android) extend the applicability of the module to a wide range of M2M and IoT applications such as smart metering, wearable devices, environmental monitoring, asset tracking, fleet management, security and alarm systems, and so on.



Key Features

- ✓ LTE Cat 1 module optimized for M2M and IoT applications
- ✓ Worldwide LTE, UMTS/HSPA(+) and GSM/GPRS/EDGE coverage
- ✓ Multi-constellation GNSS receiver available for applications requiring fast and accurate fixes in any environment
- ✓ Feature refinements: supports DFOTA and DTMF
- ✓ MIMO technology meets demands for data rate and link reliability in modem wireless communication systems



LTE Cat 1
Max. 10 Mbps (DL)
Max. 5 Mbps (UL)



Max. 42 Mbps (DL)
Max. 5.76 Mbps (UL)



LGA Package



Embedded Abundant
Protocols



USB Drivers



Multi-constellation
GNSS



USB 2.0 High Speed
Interface



Quectel Enhanced
AT Commands

Version: 1.3 | Status: Released

Quectel EG21-G

IoT/M2M-optimized LTE Cat 1 Module

Frequency Bands

EG21-G:

LTE-FDD: B1/B2/B3/B4/B5/B7/B8/B12/B13/B18/
B19/B20/B25/B26/B28

LTE-TDD: B38/B39/B40/B41

WCDMA: B1/B2/B4/B5/B6/B8/B19

GSM: B2/B3/B5/B8

Data

LTE:

LTE-FDD: Max. 10 Mbps (DL)/Max. 5 Mbps (UL)

LTE-TDD: Max. 8.96 Mbps (DL)/
Max. 3.1 Mbps (UL)

UMTS:

HSDPA: Max. 42 Mbps (DL)

HSUPA: Max. 5.76 Mbps (UL)

WCDMA: Max. 384 kbps (DL)/Max. 384 kbps (UL)

GSM:

EDGE: Max. 296 kbps (DL)/Max. 236.8 kbps (UL)

GPRS: Max. 107 kbps (DL)/Max. 85.6 kbps (UL)

Voice

Speech Codec Modes:

HR/FR/EFR/AMR/AMR-WB

Echo Arithmetic:

Echo Cancellation/Noise Suppression

Audio:

Digital Audio and VoLTE (Voice over LTE)

(Optional)

Interfaces

UART x 2 : Main UART and Debug UART

USB x 1: USB 2.0 with High Speed up to 480 Mbps

(U)SIM x 1: 1.8/3.0 V (U)SIM Interface

PCM x 1: Digital Audio through PCM (Optional)

I2C x 1

NETLIGHT x 2 (NET_STATUS and NET_MODE)

ADC x 2

SD Card x 1

SGMII x 1

RESET (Active Low)

PWRKEY (Active Low)

STATUS

USB_BOOT

Solder Pads for Primary, Rx-diversity and GNSS
Antennas

Enhanced Features

DTMF

Audio Playback/Audio Recording

QuecFile

QuecLocator®

Downlink MIMO (Supports Rx-diversity antenna)

(U)SIM Card Detection

DFOTA:

Delta Firmware Upgrade Over-The-Air

GNSS:

GPS/GLONASS/BDS/Galileo/QZSS (Optional)

Electrical Characteristics

Output Power:

GSM850: Class 4 (33 dBm ±2 dB)

EGSM900: Class 4 (33 dBm ±2 dB)

DCS1800: Class 1 (30 dBm ±2 dB)

PCS1900: Class 1 (30 dBm ±2 dB)

GSM850 8-PSK: Class E2 (27 dBm ±3 dB)

EGSM900 8-PSK: Class E2 (27 dBm ±3 dB)

DCS1800 8-PSK: Class E2 (26 dBm ±3 dB)

PCS1900 8-PSK: Class E2 (26 dBm ±3 dB)

WCDMA: Class 3 (24 dBm +1/-3 dB)

LTE-FDD: Class 3 (23 dBm ±2 dB)

LTE-TDD: Class 3 (23 dBm ±2 dB)

Consumption:

13 µA @ Power off

1.8 mA @ Sleep, Typ.

22 mA @ Idle

Sensitivity:

LTE B1: -99.5 dBm (10 MHz)

LTE B2: -99.9 dBm (10 MHz)

LTE B3: -99.7 dBm (10 MHz)

LTE B4: -99.7 dBm (10 MHz)

LTE B5: -99.9 dBm (10 MHz)

LTE B7: -99.2 dBm (10 MHz)

LTE B8: -99.8 dBm (10 MHz)

LTE B12: -99.8 dBm (10 MHz)

LTE B13: -99.5 dBm (10 MHz)

LTE B18: -100 dBm (10 MHz)

LTE B19: -99.9 dBm (10 MHz)

LTE B20: -99.8 dBm (10 MHz)

LTE B25: -100 dBm (10 MHz)

LTE B26: -99.5 dBm (10 MHz)

LTE B28: -99.6 dBm (10 MHz)

LTE B38: -98 dBm (10 MHz)

LTE B39: -99.5 dBm (10 MHz)

LTE B40: -99.2 dBm (10 MHz)

LTE B41: -97.8 dBm (10 MHz)

WCDMA B1: -109.2 dBm

WCDMA B2: -110 dBm

WCDMA B4: -109.5 dBm

WCDMA B5: -110.4 dBm

WCDMA B6: -110.5 dBm

WCDMA B8: -109.5 dBm

WCDMA B19: -110.1 dBm

GSM850: -108 dBm

EGSM900: -108 dBm

DCS1800: -107.4 dBm

PCS1900: -107.5 dBm

Software Features

USB Serial Driver:

Windows 7/8/8.1/10

Linux 2.6-5.14

Android 4.x-11.x

GNSS Driver:

Android 4.x-11.x

RIL Driver:

Android 4.x-11.x

USB NDIS Driver:

Windows 7/8/8.1/10

USB GobiNet Driver:

Linux 2.6-5.14

USB QMI_WWAN Driver:

Linux 3.4-5.14

Protocols:

TCP/UDP/PPP/FTP/HTTP/NTP/PING/QMI/NITZ/
SMTP/MQTT/CMUX/HTTPS/FTPS/SMTPS/SSL/
MMS/FILE

General Features

Operating Temperature Range: -35 to +75 °C

Extended Temperature Range: -40 to +85 °C

Dimensions: 29.0 mm × 32.0 mm × 2.4 mm

Weight: Approx. 4.9 g

LGA Package

Supply Voltage: 3.3-4.3 V, 3.8 V Typ.

3GPP E-UTRA Release 11

Bandwidth: 1.4/3/5/10/15/20 MHz

3GPP TS27.007, 27.005 and Enhanced AT

Commands

Certification

Carrier:

Deutsche Telekom (Europe)

Verizon/AT&T/T-Mobile/Sprint/U.S. Cellular
(America)

Telus (Canada)

Regulatory:

GCF (Global)

CE (Europe)

PTCRB (North America)

FCC (America)

IC (Canada)

Anatel (Brazil)

IFETEL (Mexico)

CCC (China)

KC (South Korea)

NCC (Taiwan, China)

JATE/TELEC (Japan)

RCM (Australia)

ICASA (South Africa)

Others:

RoHS

WHQL

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [RF Development Tools](#) category:

Click to view products by [Quectel Wireless](#) manufacturer:

Other Similar products are found below :

[MAAM-011117](#) [MAAP-015036-DIEEV2](#) [EV1HMC1113LP5](#) [EV1HMC6146BLC5A](#) [EV1HMC637ALP5](#) [122410-HMC686LP4E](#) [ADL5363-EVALZ](#) [130437-HMC1010LP4E](#) [EKIT01-HMC1197LP7F](#) [SKYA21001-EVB](#) [SMP1331-085-EVB](#) [EVAL01-HMC1041LC4](#) [MAAL-011111-000SMB](#) [MAAM-009633-001SMB](#) [107712-HMC369LP3](#) [107780-HMC322ALP4](#) [SP000416870](#) [EV1HMC520ALC4](#) [EV1HMC244AG16](#) [EV1HMC539ALP3](#) [124694-HMC742ALP5](#) [SC20ASATEA-8GB-STD](#) [MAX2692EVKIT#](#) [SKY12343-364LF-EVB](#) [108703-HMC452QS16G](#) [119197-HMC658LP2](#) [EV1HMC647ALP6](#) [ADL5725-EVALZ](#) [106815-HMC441LM1](#) [UXN14M9PE](#) [SIMSA868-DKL](#) [SIMSA868C-DKL](#) [SKY65806-636EK1](#) [SKY68020-11EK1](#) [SKY67159-396EK1](#) [SKY66181-11-EK1](#) [SKY65804-696EK1](#) [SKY13396-397LF-EVB](#) [SKY13380-350LF-EVB](#) [SKY13355-374LF-EVB](#) [SKY13322-375LF-EVB](#) [SKY12207-478LF-EVB](#) [SE5023L-EK1](#) [SE5004L-EK1](#) [SE2436L-EK1](#) [Se2435L-EK1](#) [CLA4609-086-EVB](#) [SIMSA915C-DKL](#) [SIMSA915-DKL](#) [SIMSA433C-DKL](#)