


# Quectel FCM360W

## Wi-Fi 6 & Bluetooth 5.1 Module Compact LCC Package

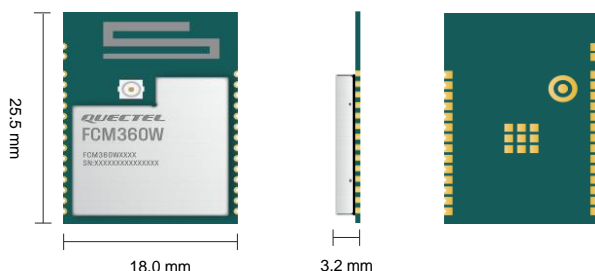

FCM360W is a cutting-edge MCU Wi-Fi and Bluetooth module launched by Quectel. It boasts a high-performance processor with a frequency of up to 240 MHz and supports IEEE 802.11b/g/n/ax protocol and Bluetooth 5.1. The module features built-in 512 KB SRAM and 4 MB/ 8 MB flash, ensuring efficient performance. In addition, it complies with WPA-PSK, WPA2-PSK and WPA3-PSK security standards, providing 128-bit AES encryption for added security.

FCM360W is in a LCC form factor with an ultra-compact package size of 25.5 mm × 18.0 mm × 3.2 mm, which optimizes the size and cost for end-products and is compatible with diverse designs.

FCM360W supports multiple interfaces including UART, SPI, I2C, I2S, ADC and PWM, and many low power consumption modes and keep-alive mechanism, which provide flexibility and versatility for a range of applications, especially in smart homes and industrial IoT scenarios.

FCM360W supports the QuecOpen® solution, and has a user-friendly protocol stack and large memory. This allows for multi-channel SSL connections and local cache of large amounts of data, making it especially suitable for photovoltaic inverters, energy storage batteries and other smart devices that require long-term data monitoring and storage.



### Key Features

- ✓ Wi-Fi 6 module, single band (2.4 GHz) Wi-Fi, 1 × 1 antenna
- ✓ Bluetooth 5.1 and Bluetooth pairing
- ✓ Large memory, 512 KB SRAM and 4 MB/ 8 MB flash
- ✓ Multiple interfaces, 19 GPIOs
- ✓ UART, SPI, I2C, I2S, ADC and PWM
- ✓ RF coaxial connector, external antenna pin, PCB antenna (optional)
- ✓ SPI interface available for Ethernet solution\*



IEEE 802.11b/g/n/ax



Bluetooth 5.1



Large Memory



Compact Size



LCC Form Factor



Multiple Interfaces



Operating Temperature  
Range: -40 °C to +85 °C

# Quectel FCM360W

Wi-Fi 6 & Bluetooth 5.1		FCM360W
WLAN Protocol	IEEE 802.11b/g/n/ax	
Wi-Fi Frequency Band	2.4 GHz	
Wi-Fi Modulation Mode	CCK/ BPSK/ QPSK/ 16QAM/ 64QAM	
Wi-Fi Operating Mode	AP/ STA	
Bluetooth Protocol	Bluetooth 5.1	
Encryption Mode	WPA-PSK/ WPA2-PSK/ WPA3-PSK/ AES-128	
Internet Protocol	IPv6	
Kernel	RISC Processor (up to 240 MHz)	
SRAM	512 KB	
Flash <sup>①</sup>	4 MB/ 8MB	
Dimension	25.5 mm × 18.0 mm × 3.2 mm	
Weight	1.65 g	
<b>Temperature Range</b>		
Operating Temperature Range	-40 °C to +85 °C	
Storage Temperature Range	-45 °C to +95 °C	
<b>Certification</b>		
Regulatory	<b>Europe:</b> CE* <b>America:</b> FCC* <b>China:</b> SRRC* <b>Canada:</b> IC* <b>Australia/New Zealand:</b> RCM*	
<b>Interfaces</b>		
Antenna Interface	× 1 (RF coaxial connector, external antenna pin, PCB antenna) (Optional)	
Other Interfaces <sup>②</sup>	UART/ SPI/ I2C/ I2S/ PWM/ ADC	
<b>Electrical Features</b>		
Power Supply Voltage	3.0–3.6 V, Typ. 3.3 V	
<b>RF Performance</b>		

		Receiver Sensitivity	Transmit Power
2.4 GHz	802.11b/1 Mbps	-92 dBm ±2 dB	17 dBm ±2 dB
	802.11b/11 Mbps	-86 dBm ±2 dB	17 dBm ±2 dB
	802.11g/6 Mbps	-89 dBm ±2 dB	14 dBm ±2 dB
	802.11g/54 Mbps	-73 dBm ±2 dB	14 dBm ±2 dB
	802.11n/HT20 MCS 0	-89 dBm ±2 dB	14 dBm ±2 dB
	802.11n/HT20 MCS 7	-70 dBm ±2 dB	14 dBm ±2 dB
	802.11n/HT40 MCS 0	-87 dBm ±2 dB	13 dBm ±2 dB
	802.11n/HT40 MCS 7	-67 dBm ±2 dB	13 dBm ±2 dB
	802.11ax/HT20 MCS 0	-89 dBm ±2 dB	14 dBm ±2 dB
	802.11ax/HT20 MCS 7	-69 dBm ±2 dB	14 dBm ±2 dB
BLE	1 Mbps	-90 dBm ±2 dB	6 dBm ±2 dB
	2 Mbps	-89 dBm ±2 dB	6 dBm ±2 dB

Ordering Code	Flash	Operating Temperature Range	Antenna	Development Board (Only for Debugging)
FCM360WAAMD-1X-04	4 MB	-40 °C to +85 °C	RF coaxial connector	-
FCM360WAAMD-0L-04	4 MB	-40 °C to +85 °C	External antenna pin	FCM360WAATB-0L-04
FCM360WAAMD-0P-04	4 MB	-40 °C to +85 °C	PCB antenna	FCM360WAATB-0P-04
FCM360WAAMD-0P-08	8 MB	-40 °C to +85 °C	PCB antenna	-

#### NOTE:

- ①: Contact Quectel sales if you need a flash of other specifications.
- ②: See hardware design documents for details of the module interfaces.
- \*: under development or ongoing.

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Multiprotocol Modules](#) category:*

*Click to view products by [Quectel Wireless](#) manufacturer:*

Other Similar products are found below :

[9260.NGWG.NV 958867](#) [AX210.NGWG.NV](#) [BM833](#) [ESP32-C3-MINI-1U-H4](#) [ESP32-WROOM-32U-16MB](#) [ESP32-WROOM-32UE](#)  
[ESP32-WROOM-32D-H4](#) [ESP32-WROOM-32U-H4](#) [ESP32-PICO-MINI-02U-N8R2](#) [ESP32-C6-WROOM-1-N4](#) [ESP32-C6-WROOM-1U-N4](#)  
[ESP32-C6-WROOM-1-N8](#) [BE200.NGWG.NV](#) [BE200.NGWG](#) [BE202.NGWG.NV](#) [BE200.NGWG.NVX](#) [AX411.NGWG.NV](#) [AX210.D2WG](#)  
[AX210.NGWG.NVX](#) [AX211.NGWG](#) [EC200UEUAA-N05-TA0AA](#) [SC20ELSATEA-8GB-UGAD](#) [SG560DEUPA-U61-TA0AA](#)  
[AX211.NGWG.NV](#) [ISM43340-M4G-L44-10CF-C6.2.1.11](#) [KG100SABMD](#) [BC40P](#) [S007-PIN254](#) [S007-PIN127](#) [ESP32-C3-12F](#)  
[FC41DAHMD](#) [EWM-W179M201E](#) [ESP32-C6-WROOM-1U-N8](#) [ATWILC3000-MR110CA](#) [RS9113-NBZ-D5W](#) [ATWINC3400-](#)  
[MR210UA122](#) [ESP32-WROOM-32](#) [AMPAK AP12356 WIFI/BT KIT](#) [AIW-154BN](#) [AIW-165BN](#) [AIW-166K1](#) [AIW-166K2](#) [AIW-166K3](#)  
[AIW-166K4](#) [AIW-355 DQ-N01](#) [AIW-355 DQ-C01](#) [EWM-W159M201E](#) [EWM-W192K1](#) [EWM-W192K2](#) [W106C](#)