


Quectel L76-L

Extremely Compact GNSS Module with Ultra Low Power Consumption

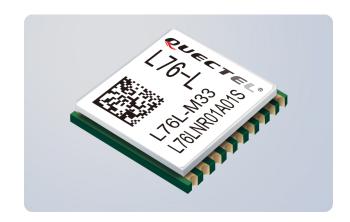

L76-L is a single receiver module integrating GLONASS and GPS systems. With 33 tracking channels, 99 acquisition channels and 210 PRN channels, L76-L can acquire and track any mix of GPS, GLONASS and SBAS signals. Designed to be compatible with Quectel L76 module in the compact and unified form factor, L76-L provides a built-in LNA for better performance in weak signal areas.

Compared with using GPS only, enabling multiple GNSS systems generally increases the number of visible satellites, reduces the time to first fix and increases positioning accuracy, especially when driving in rough urban environments.

Combining advanced AGPS called EASY™ (Embedded Assist System) and proven AlwaysLocate™ technology, L76-L achieves the highest performance and fully meets the industrial standard. EASY™ technology allows L76-L to calculate and predict orbits automatically using the ephemeris data (up to 3 days) stored in internal flash memory, so L76-L can fix position quickly even at indoor signal levels with low power consumption. With AlwaysLocate™ technology, L76-L can adaptively adjust the on/off time to achieve balance between positioning accuracy and power consumption according to the environmental and motional conditions.

Its super performance makes L76-L ideal for automotive, industrial PDA, consumer and industry applications. Extremely low power consumption makes it easier to be applied to power sensitive devices, especially portable applications.



Key Benefits

- ✓ Extremely compact size, 10.1mm × 9.7mm ×2.5mm
- Multi-GNSS engine for GPS, GLONASS, Galileo and QZSS
- ✓ Support EASY[™], an advanced AGPS technology without external memory
- ✓ Built-in LNA for better sensitivity
- ✓ Ultra low tracking power consumption
- ✓ AlwaysLocate[™], an intelligent algorithm for power saving
- ✓ LOCUS, an embedded logger function with no need for host and external flash
- ✓ Offer 99 acquisition/33 tracking channels and 210 PRN channels
- ✓ Support DGPS, SBAS (WAAS/EGNOS/MSAS/GAGAN)
- ✓ Support UART and I2C Interfaces
- Great anti-jamming performance due to multi-tone active interference canceller
- ✓ Balloon mode, for high altitude up to 80km
- ✓ PPS VS. NMEA can be used for time service
- ✓ Support SDK command developed by Quectel



EASY™ Technology



Ultra Low Power Consumption



Extremely Compact



Super Tracking Sensitivity: -167dBm



Extended Temperature Range: -40°C ~ +85°C



Anti-jamming




RoHS Compliant



Multi-GNSS Systems

Quectel L76-L

Extremely Compact
GNSS Module with Ultra Low
Power Consumption

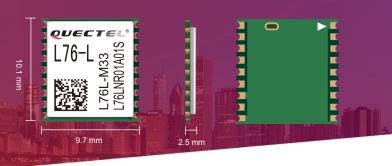

GNSS Features

GPS L1 Band Receiver (1575.42MHz)/

GLONASS L1 Band Receiver (1601.71MHz):

Channel: 33 (Tracking)/ 99 (Acquisition)/

210 (PRN)

C/A Code

SBAS: WAAS, EGNOS, MSAS, GAGAN

Horizontal Position Accuracy:

Autonomous: <2.5m CEP

Velocity Accuracy:

Without Aid: <0.1m/s

Acceleration Accuracy:

Without Aid: <0.1m/s²

Timing Accuracy:

1PPS: 10ns

Reacquisition Time: <1s

TTFF @-130dBm with EASY™:

Cold Start: <15s

Warm Start: <5s

Hot Start: <1s

TTFF @-130dBm without EASY™:

Cold Start: <35s

Warm Start: <30s Hot Start: <1s

Sensitivity:

Acquisition: -149dBm

Tracking: -167dBm

Reacquisition: -161dBm

Reacquisition: -161dBm

Dynamic Performance:

Maximum Altitude: Max. 18000m Maximum Velocity: Max. 515m/s

Maximum Acceleration: 4G

Interfaces

Serial Interface:

I2C: Up to 400kbps

UART: Adjustable 4800bps~115200bps

Default: 9600bps

Update Rate:

1Hz (Default), up to 10Hz

I/O Voltage:

2.7V~2.9V

Protocols:

NMEA 0183

PMTK

Power Saving:

2.8mA @AlwaysLocate™ (Note1)

7uA @Backup Mode

500uA @Standby Mode

Periodic Mode

Antenna Type:

Active or Passive

Antenna Power:

External or Internal VCC_RF

Note1: Measured in GPS+GLONASS System under

Outdoor Static Mode.

General Features

Extended Temperature:

-40°C ~ +85°C

Dimensions:

10.1mm × 9.7mm × 2.5mm

Weight:

Approx. 0.6g

Power Management

Power Supply:

2.8V~4.3V

Power Acquisition:

25mA @3.3V (GPS)

29mA @3.3V (GPS+GLONASS)

Power Tracking:

19mA @3.3V (GPS)

22mA @3.3V (GPS+GLONASS)

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for GPS Modules category:

Click to view products by Quectel Wireless manufacturer:

Other Similar products are found below:

EWM-G109H01E ISM3333-C6.1 GPS-11858 SL871GPS232R001 DD-14239 GPS-10922 M20050-1 M20048-1 S2-105Y0-Z1E0G

SIM28ML EWM-G110H01E WISE-4610P-NA M10578-A3 M10578-A3-U2 GPS-13740 A2200-A MIKROE-4150 28504 L26ADR-S89

L26-M33 L26T-S89 L70B-M39 L76L-M33 L89-S90 L96-M33 S2-10640-Z1G0D EL.1A 4037735105317 4037735105331 W2SG0084i-B
T EWM-G108H01E TEL0132 PKG300060P PKG300071 PKG900000000271T RXM-GPS-F4-T RXM-GPS-FM-B A1084-A A2100-A

GPS-13670 GYSFFMAXC