

Quectel M95

Quad-band GSM/GPRS Module



M95 is a highly compact Quad-band GSM/GPRS module in LCC castellation packaging in the market. It adopts the latest MTK chipset and features compact size of 19.9mm × 23.6mm × 2.65mm, ultra low power consumption and extended temperature range.

With surface mounted technology, the low profile and small size of LCC package make M95 easily embedded into the low-volume applications and ensure the reliable connectivity with the applications. This kind of package is ideally suited for large-scale manufacturing which has the strict requirements for cost and efficiency.

Built-in unique QuecFOTA™ technology allows M95 to update the firmware remotely. Additional features such as integrated TCP/IP protocol stacks, serial multiplexer and enhanced AT commands guarantee fast and reliable transmission of data, voice, SMS via GSM/GPRS network and extend the functionality of the application at no additional cost.

Its compact size and ultra low power consumption makes M95 a very cost effective and feature-rich platform that is quite suitable for a wide range of M2M applications such as VTS, industry PDA, personal tracking, wireless POS, smart metering and many other M2M applications.



Key Benefits

- ✓ Highly compact Quad-band GSM/GPRS module
- ✓ Easier soldering process with LCC package
- ✓ Embedded Class-AB amplifier
- ✓ Power consumption as low as 1.3mA
- ✓ Embedded powerful Internet service protocols, multiple Sockets & IP addresses
- ✓ eCall
- ✓ QuecFOTA™
- ✓ Jamming detection
- ✓ DTMF
- ✓ QuecLocator



Quad-band



GPRS Multi-slot
Class 12



Extended Temperature
Range -40°C to +85°C



Highly Compact Size



LCC Type



Embedded Internet
Services Protocols




Serial Port



PCM

Quectel M95

Quad-band GSM/GPRS Module

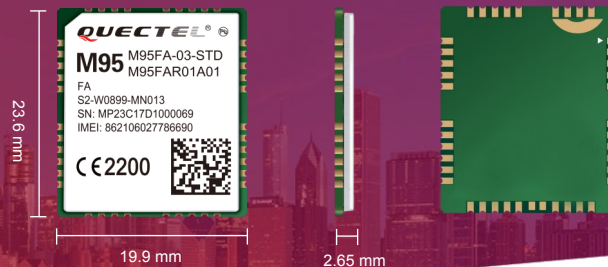

Frequency Band

Quad-band:

850/ 900/ 1800/ 1900MHz

Data

GPRS Class 12:

Max. 85.6kbps (Uplink & Downlink)

PBCCH

Coding Schemes:

CS 1, 2, 3, 4

USSD

Non-transparent Mode

SMS

Point-to-point MO and MT

SMS Cell Broadcast

Text and PDU Mode

Voice

Speech Codec Modes:

Half Rate (HR)

Full Rate (FR)

Enhanced Full Rate (EFR)

Adaptive Multi-Rate (AMR)

Echo Arithmetic:

Echo Cancellation

Echo Suppression

Noise Reduction

Interfaces

(U)SIM Card Interface:

× 2, (U)SIM 3.0V/ 1.8V

UART:

× 2

Analog Audio Channel:

× 2 (Embedded Class-AB Amplifier in One Channel)

PCM

RTC Backup

Antenna Pad

Enhanced Features

eCall

Jamming Detection

DTMF

Audio Play/ Audio Record

Dual SIM Single Standby

QuecFOTA™

QuecCell

QuecLocator

RIL for Android

MUX

Electrical & Sensitivity

Output Power:

Class 4 (2W @850/ 900MHz)

Class 1 (1W @1800/ 1900MHz)

Consumption:

1.3mA @DRX=5

1.2mA @DRX=9

Sensitivity:

GSM850: -109dBm

GSM900: -109dBm

DCS1800: -109dBm

PCS1900: -109dBm

Supply Voltage:

3.3V~4.6V, 4.0V Typ.

Software Features

Protocols: PPP/ TCP/ UDP/ FTP/ HTTP/ SMTP/

SSL/ MUX

General Features

GPRS Multi-slot Class: 12, 1~12 Configurable

GPRS Mobile Station: Class B

Extended Temperature: -40°C ~ +85°C

Dimensions: 19.9mm × 23.6mm × 2.65mm

LCC Package

Weight: Approx. 3.0g

GSM 07.07, 07.05 and other Enhanced AT

Commands

Approvals

RoHS Compliant

CE/ GCF/ Vodafone/ UCRF/ ATEX/ Vodafone (Europe)

DoC (Russia)

FCC/ PTCRB/ IC/ Rogers (North America)

Anatel (Brazil))

NCC (Taiwan)

ICASA (South Africa)

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Mobile Modules](#) category:

Click to view products by [Quectel Wireless](#) manufacturer:

Other Similar products are found below :

[SIM7100A 4G/LTE KIT](#) [EZTEXT](#) [CB410L](#) [XBC-M5-UT-001](#) [GSM-EXP](#) [MPCIE-3G-R10](#) [M100CDMA485-V](#) [M100CDMAPLUS-V](#)
[nRF9160-SICA-R7](#) [ONE523MEA](#) [T523MEA](#) [2701344](#) [EG91NAXGA-128-SGNS](#) [EG91NSGA-512-SGNS](#) [SARA-R412M-02B](#) [ASB-EX15-](#)
[WC18-GLB](#) [ASB-EX15-XC18-GLB](#) [ASB-EX15-XX06-GLB](#) [ASB-EX15-XX06-OUS](#) [SKY77643-11](#) [SKY77768-11](#) [SKY77764-11](#)
[SKY77765-11](#)