



REVISIONS									
REV.	DESCRIPTION	DATE	APPROVED						
А	INITIAL RELEASE	05/06/10	A.D.M.						

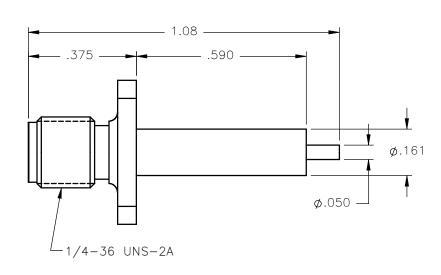

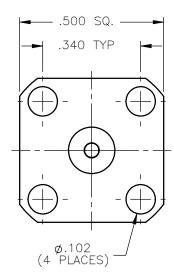

## NOTES:

## MATERIALS:

- 1. BODY = STAINLESS STEEL PER ASTM A582, ALLOY 303, CONDITION "A".
  2. INSULATOR = VIRGIN WHITE TEFLON PER ASTM D1710, GRADE 1, TYPE I, CLASS "B".
  3. CONTACT = BERYLLIUM COPPER PER ASTM B196, ALLOY C17300, TEMPER TD04.

## FINISHES:

- BODY = GOLD PLATE PER MIL-G-45204, TYPE II, CLASS 0, GRADE C, OVER .000050 TO .00010 STRESS FREE NICKEL PER QQ-N-290.
   CONTACT = GOLD PLATE PER MIL-G-45204, TYPE II, CLASS 1, GRADE C, OVER .00010 TO .00020 STRESS FREE SULFAMATE NICKEL PER QQ-N-290.

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ON		DWN: A.D.M. CHKD:	DATE 05/06/10 DATE		Property of Radiall  This document cannot be reproduced or communicated to a third party without prior written permission of RADIALL.				
DECIMAL	ANGLE	D.N.	05/06/10	SMA STRAIGHT JACK					
		APVD:	DATE	(4) HOLE MOUNT					
		J.M.	05/06/10	RÉCEPTACLE					
REFERENCE:		MATERIALS & FI	NISHES:	SIZE	FSCM NO.	DWG NO. 1111	7 000	REV	
ORIGINATED: A.D.M.		SEE NOTES		А	19505	9004-1113	5-000	А	
DATE: 05/06/10				SCALE	3:1	THIRD ANGLE PROJECTION	SHEET 1 O	F 1	

## **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for RF Connectors / Coaxial Connectors category:

Click to view products by Radiall manufacturer:

Other Similar products are found below:

8915-1511-000 89674-0827 6001-7071-019 6002-7051-003 6002-7551-202 6059674-1 619550-1 630059-000 M39030/3-01N 6500-7071-046 6769 CX050L2AQ 7002-1541-010 7002-1542-011 7004-1512-000 7009-1511-004 7010-1511-000 7029-1511-060 7101-1541-010 7101-1571-002 7145-1521-002 7203-1571-003 7209-1511-011 7210-1511-015 7210-1511-019 73137-5015 73216-2241 73404-2300 7405-1521-005 7405-1521-802 8527 8547 FS11V 877931 9049-9513-000 9074-9513-000 9101-9573-002 910A205F 9130-9573-002 PL11SC-026 PL375-33 PL40-5 PL74C-221 PL75MC-217 PL803-7 980-8666-005 1200690078 1-201144-1 R107003010W R110A172100