

### TECHNICAL DATA SHEET

# F727.103.500


LC SIMPLEX PC MULTIMODE OPTICAL PLUG FOR Ø2 MM CABLE

Packaging 100

Series LC Issue 30 JAN 06 Page 1/2

Outer plug body: color BEIGE

Monobloc

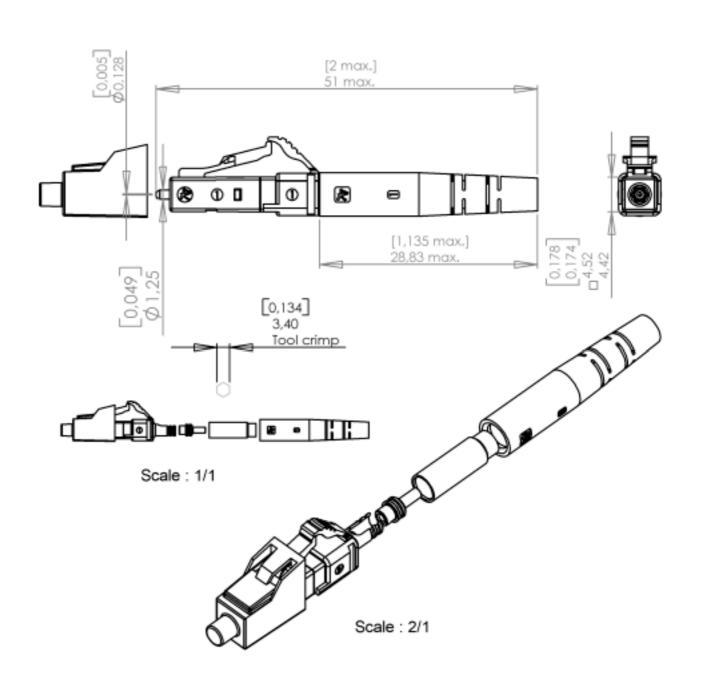

Original dimensions in mm [inch]



### TECHNICAL DATA SHEET

## F727.103.500

LC SIMPLEX PC MULTIMODE OPTICAL PLUG
FOR Ø2 MM CABLE

Packaging Series Issue Page
100 LC 30 JAN 06 2 / 2

Outer plug body : color BEIGE Monobloc

#### **GENERAL**

□ **TYPE** IEC 61754-20 (LC )

Multimode Zirconia ferrule RJ –45 latching connector system

□ FERRULE SIZE 128 μm

□ **FIBER SIZE** 62,5/125µm multimode

☐ CABLE SIZE & TYPE Ø2 ou 2,2 mm Simplex

□ CABLING PROCEDURE Refer to 503.08.500 assembly instruction manual

#### **CHARACTERISTICS** (Depending on fibre or cable construction)

□ **OPTICAL** Attenuation at 850 nm and 1300 nm

Attenuation plug mated with reference plug: IEC 61300-3-4 Method E

PARAMETER	STD
Mean	≤0.10 dB
Standard deviation	≤0.05 dB

Attenuation of random mated connectors: IEC 61300-3-34

PARAMETER	STD
Mean	≤0.10 dB
Standard deviation	≤ 0.07 dB

Return-Loss Maximum loss variation: IEC 61300-3-6

	$\mathbf{R}$ L
PC	> 20 dB

■ MECHANICAL Vibration test 10 to 55 Hz , 1,5 mm (peak to peak) , 2 Hr/axis

Impact test1,5 m drop , 8 cyclesMechanical Endurance200 matingsCable retention68 N

□ ENVIRONMENTAL Storage temperature range -40 °C to +85 °C

Operating temperature range +40 °C to +70 °C

Thermal cycle test  $-40^{\circ}$ C to  $+75^{\circ}$ C, 21 Cycles, 168

Humidity/Condensation cycling test 95% RH, -10°C to +65°C, 14 cycles, 168 Hr

(Performance and specification : see document GEN – F727 001)

## **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Fibre Optic Connectors category:

Click to view products by Radiall manufacturer:

Other Similar products are found below:

0004700001 6100-R 6313 F709034706 F709722200 F709730000 F718183204 F727403500 F727752800 8119 9440F20-27S-190 944-120-6001 9441F10SL-3S 9444W28-21S 9444W36-10S 9446F10SL-4S 9446W20-16S 953-101-5310-P 954-101-57202B A0270169 12-9122 12-5702 AX101713 AX102420 AX103923 AX104024 AX104193 AX104230 AX104498 AX104562 AX105203-B25 AX105205-S1 EHSC2M 181-011-126 181-011-S 181-057-126 HRFC-R2(40) NKSOPBUY 20500002116 2064996-1 20800001065 2170 9132 2612 2620 9291 9440F16-10S 9440F20-18S 9442W14S-10P 9446F16-10S-190