


TECHNICAL DATA SHEET

F727 752 100

Title: LC DUPLEX APC SM ADAPTOR ZR ALIGNEMENT SLEEVE Packaging Series Issue Page 100 F727 Nov. 14th 06 1/1

Dimensions: mm / (inches)

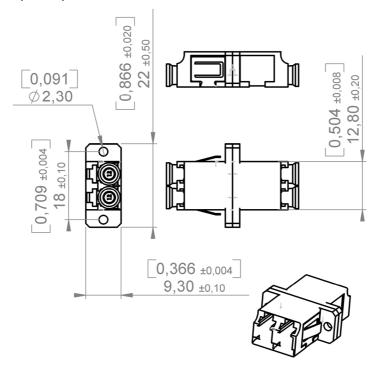

GENERAL

TYPE IEC 61754 - 20 (LC)

Receptacle colour: Green

MOUNTING SC panel cut-out screw in (max. panel thickness 1.6mm)

ALIGNEMENT SLEEVE Zirconia

CHARACTERISTICS (Depending on fibre or cable construction)

MATERIAL Plastic moulded (body UL94 V0 rated)

MECHANICAL Durability: 200 cycles

ENVIRONMENTAL Storage temperature - 40°C / + 85°C

Operating temperature - 25°C / + 70°C

CREATION					RADIALL®
N°:					101, rue P. Hoffmann
EPF : PEN					93116 ROSNY/BOIS
F061200333					93110100011/10013
Name: LV					FRANCE
Date: Nov 14 th 06					Tel: (33) 0149353535
Appr: GM	Issue	Revisions	Name	Appr.	Fax: (33) 0148546363

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Fibre Optic Connectors category:

Click to view products by Radiall manufacturer:

Other Similar products are found below:

0004700001 6100-R 6313 F709034706 F709722200 F709730000 F718183204 F727403500 F727752800 8119 9440F20-27S-190 944-120-6001 9441F10SL-3S 9444W28-21S 9444W36-10S 9446F10SL-4S 9446W20-16S 953-101-5310-P 954-101-57202B A0270169 12-9122 12-5702 AX101713 AX102420 AX103923 AX104024 AX104193 AX104230 AX104498 AX104562 AX105203-B25 AX105205-S1 EHSC2M 181-011-126 181-011-S 181-057-126 HRFC-R2(40) NKSOPBUY 20500002116 2064996-1 20800001065 2170 9132 2612 2620 9291 9440F16-10S 9440F20-18S 9442W14S-10P 9446F16-10S-190