




Dimensions : mm / [inches]

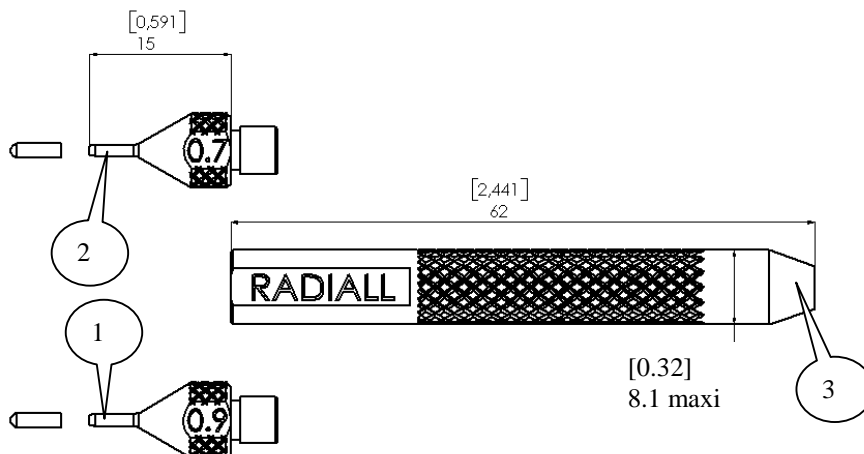

GENERAL

- Compatible with LC, SC and FC connectors.
- Suitable for use with cable sizes Ø 1.5 mm to 3.2 mm.
- Stainless steel.

CHARACTERISTICS


FUNCTIONING

1. For 0.9 mm buffer coating: screw the part number 1 on the part number 3
and
For 0.6 or 0.7 mm buffer coating: screw the part number 2 on the part number 3.




Example


2. Insert the part number 1 or 2 under the outer cable and under the reinforcing elements in aramid yarns.



3. Insert the inner sleeve inside the part number 3.



4. Insert, by growing with the tool, the inner sleeve under the outer cable and under the reinforcing elements in aramid yarns.

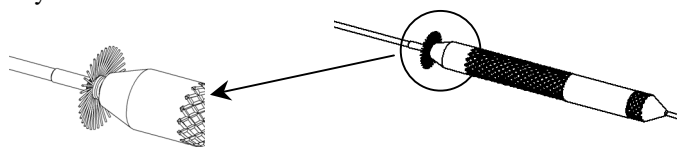

CREATION				RADIALL®	
N°:				101, rue P. Hoffmann	
EPF : 0001-1				93116 ROSNY/BOIS	
Name : P.B.				FRANCE	
Date : 06 19 02				Tel : (33) 0149353535	
Appr : S.D.	Issue	Revisions	Name	Appr.	Fax : (33) 0148546363

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Fibre Optic Connectors](#) category:

Click to view products by [Radiall](#) manufacturer:

Other Similar products are found below :

[0004700001](#) [6100-R](#) [6313](#) [F709034706](#) [F709722200](#) [F709730000](#) [F718183204](#) [F727403500](#) [F727752800](#) [8119](#) [9440F20-27S-190](#) [944-120-6001](#) [9441F10SL-3S](#) [9444W28-21S](#) [9444W36-10S](#) [9446F10SL-4S](#) [9446W20-16S](#) [953-101-5310-P](#) [954-101-57202B](#) [A0270169](#) [12-9122](#) [12-5702](#) [AX101713](#) [AX102420](#) [AX103923](#) [AX104024](#) [AX104193](#) [AX104230](#) [AX104498](#) [AX104562](#) [AX105203-B25](#) [AX105205-S1](#) [EHSC2M](#) [181-011-126](#) [181-011-S](#) [181-057-126](#) [HRFC-R2\(40\)](#) [NKSOPBUY](#) [20500002116](#) [2064996-1](#) [20800001065](#) [2170](#) [9132](#) [2612](#) [2620](#) [9291](#) [9440F16-10S](#) [9440F20-18S](#) [9442W14S-10P](#) [9446F16-10S-190](#)