

FEMALE-FEMALE BULKHEAD ADAPTOR

R125.720.001


Series: SMA

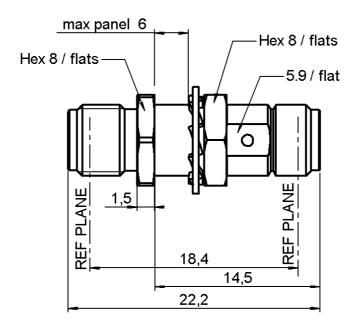

PANEL CUT OUT



	mm	
	Maxi	mini
\mathbf{A}	6.5	6.4
В	6.1	6



All dimensions are in mm.





COMPONENTS	MATERIALS	PLATINGS (μm)
BODY CENTER CONTACT OUTER CONTACT INSULATOR GASKET OTHERS PARTS	STAINLESS STEEL BERYLLIUM COPPER - PTFE - BRASS	PASSIVATED . GOLD 1.3 OVER NICKEL 2 - NICKEL 2 -
-	-	-

Issue: 0305 C

In the effort to improve our products, we reserve the right to make changes judged to be necessary.



FEMALE-FEMALE BULKHEAD ADAPTOR

R125.720.001

Series: SMA

PACKAGING

Standard Unit Other 100 'W' option Contact us

SPECIFICATION

ELECTRICAL CHARACTERISTICS

 $\begin{array}{ccc} \text{Impedance} & & \textbf{50} \;\; \Omega \\ \text{Frequency} & & \textbf{0-18} \;\; \text{GHz} \end{array}$

VSWR 1.05 + 0.005 x F(GHz) Maxi Insertion loss 0.07 $\sqrt{F(GHz)}$ dB Max

Insertion loss RF leakage $0.07 \sqrt{F(GHz)} dB Maxi$ -(60 - F(GHz)) dB Maxi

 $\begin{array}{ccc} \mbox{Voltage rating} & \mbox{500 Veff Maxi} \\ \mbox{Dielectric with standing voltage} & \mbox{1000 Veff mini} \\ \mbox{Insulation resistance} & \mbox{5000 } \mbox{M}\Omega \mbox{ mini} \end{array}$

ENVIRONMENTAL

Operating temperature -65/+165 ° C Hermetic seal NA Atm.cm3/s

Panel leakage NA

OTHERS CHARACTERISTICS

Assembly instruction

Others:

MECHANICAL CHARACTERISTICS

Center contact retention

Axial force – Mating end
Axial force – Opposite end
Torque

27 N mini
27 N mini
28 N.cm mini

Recommended torque

Mating NA N.cm Panel nut NA N.cm

Mating life 500 Cycles mini

Weight **3.838** g

Issue: 0305 C

In the effort to improve our products, we reserve the right to make changes judged to be



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for RF Adapters - In Series category:

Click to view products by Radiall manufacturer:

Other Similar products are found below:

5916-1103-603 5919-1503-000 651A505 82-5552 9030-9523-502 PN2C A0407000 R114703000W R125771001 R141710000W

R141723161 R141730000 R143730700 R143770000 R161703000W R161753000W R161791530W R201705000 R222705200

R222M40010W R223703180 R316754000 R405006000 R443162000 AD78TL HRM-513S 1996352-2 2157155-1 252169-75 AD158

2101130-1 252186 R114704000W R114720000W R125705001 R125705701 R125771000 R125771001W R127704001 R127.870.001

R127872001 R141717000 R142710000 R142723000 R143703000 R143704000 R143705700 R161715000W R161771000W R176754000