




N MALE - SMA FEMALE STRAIGHT ADAPTER -



This document contains proprietary information and such information shall not be disclosed to any third party for any purpose whatsoever or used for manufacturing purposes without prior written agreement from Radiall. The data defined in this document are given as an indication, in the effort to improve our products; we reserve the right to make any changes judged necessary.

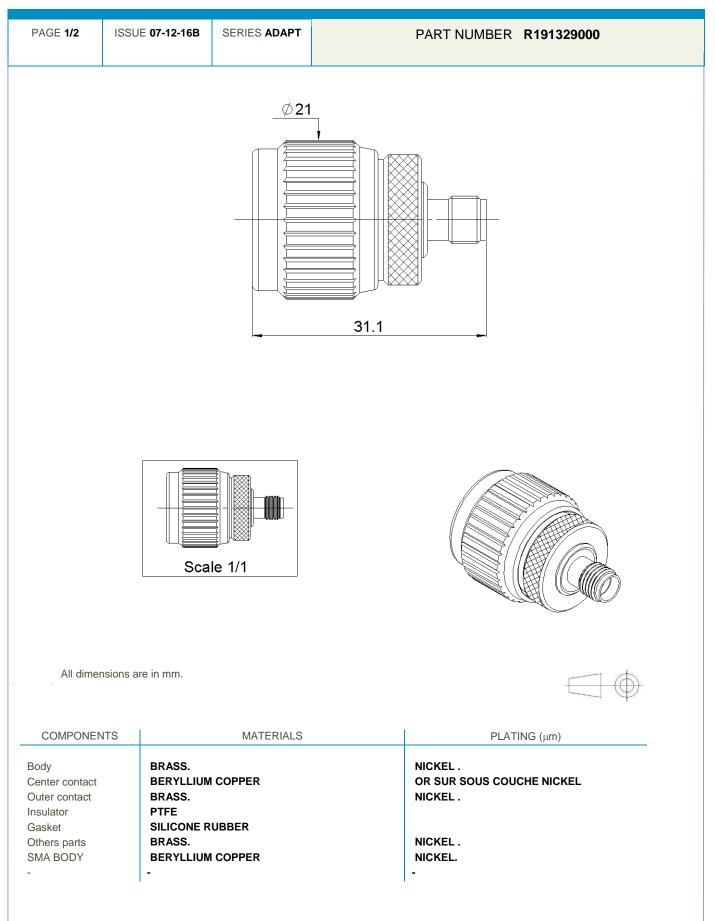

Technical Data Sheet

N MALE - SMA FEMALE STRAIGHT ADAPTER -

PACKAGING Standard Unit Other 1 - Contact us December 2000 Standard Other 1 - Contact us December 2000 Standard Other mpedance 50 Ω requency 0-11 GHz (SWR 1.20 + 0.0000 x F(GHz) dB Maxi (SWR 0.20 + (GHz) dB Maxi Environmental (Alte carting 500 Veff Maxi Operating -554;155 °C (Delectric withstanding voltage 5000 MΩ mini Operating -554;155 °C Delectric withstanding voltage 5000 MΩ mini Operating -554;155 °C Axial force - Opposite end 18 N mini N N N SPECIFICATION Natal force - Opposite end 18 N mini N N N N N Yean or on SMA 0 N.cm 0 N N N N N N N Panel nut <	PAGE 2/2 ISS	GUE 07-12-16B	SERIES ADAPT			PART NUMBE	ER R1913290	00
Standard Unit Other 1 - Contact us ELECTRICAL CHARACTERISTICS Operating Source irrequency 0-11 GHz SWR 1.20 + 0,0000 x F(GHz) Maxi Steleatric withstanding voltage 0.2 VF(GHz) dB Maxi Voltectric withstanding voltage 5000 Veff Maxi Volectoric withstanding voltage 5000 MΩ mini Delectric withstanding voltage 5000 MΩ mini Maild force - Mating End *18 N mini Axial force - Opposite end *18 N mini Axial force - Opposite end *18 N mini Axial force - Soposite end *18 N mini Mating life 500 Cycles mini								
I - Contact us ELECTRICAL CHARACTERISTICS mpedance 50 Ω requency 0-11 GHz /SWR 1.20 + 0,000 Nasertion loss 0.2 VF(GHz) dB Maxi nsertion loss - (101 Steleakage - { (101 Yeleakage - { (101 Sold Veff Maxi Operating Dielectric withstanding voltage 1500 Dielectric withstanding voltage 1500 MECHANICAL CHARACTERISTICS MA Center contact retention *18 Axial force – Opposite end *18 Naing NA NA N.cm Mating N Openating • N.cm Panel nut NA Mating life 500		PACK/				AGING		
mpedance 50 Ω Frequency 0-11 GHz SWR 1.20 + 0,0000 Insertion loss 0.2 √F(GHz) dB Maxi SR leakage -{ 101 -F(GHz) dB Maxi /oltage rating 500 Veff Maxi Delectric withstanding voltage 5000 Veff Maxi nsulation resistance 5000 MΩ mini MECHANICAL CHARACTERISTICS Operating -55/+155 °C Maxia force – Mating End *18 N mini NA Atm.cm3/s Axial force – Mating End *18 N mini Operating Other CHARACTERISTICS Recommended torque NA N.cm NA N.cm Other CHARACTERISTICS Recommended torque NA 0 N.cm Other CHARACTERISTICS Other CHARACTERISTICS Recommended torque NA 0 N.cm - o N.cm Mating N 0 N.cm - o N.cm * out of SMA CDC. Mating life 500 Cycles mini NA N.cm -		F					-	
mpedance 50 Ω irrequency 0-11 GHz SWR 1.20 + 0,0000 insertion loss 0.2 √F(GHz) dB Maxi Steleatic withstanding voltage 500 Veff Maxi Jolelectric withstanding voltage 5000 Veff Maxi Insulation resistance 5000 Veff mini MECHANICAL CHARACTERISTICS Operating -55/+155 °C Mermetic seal NA Atm.cm3/s Panel leakage *18 N mini Axial force – Mating End *18 N mini Axial force – Mating End *18 N mini Avial force – Mating End *18 N mini Argue NA N.cm Recommended torque NA N.cm Mating N 0 N.cm - 0 N.cm * out of SMA CDC. - 0 N.cm * out of SMA CDC. * Panel nut NA N.cm * out of SMA CDC.								
mpedance 50 Ω Frequency 0-11 GHz SWR 1.20 + 0,0000 Insertion loss 0.2 √F(GHz) dB Maxi SR leakage -{ 101 -F(GHz) dB Maxi /oltage rating 500 Veff Maxi Delectric withstanding voltage 5000 Veff Maxi nsulation resistance 5000 MΩ mini MECHANICAL CHARACTERISTICS Operating -55/+155 °C Maxia force – Mating End *18 N mini NA Atm.cm3/s Axial force – Mating End *18 N mini Operating Other CHARACTERISTICS Recommended torque NA N.cm NA N.cm Other CHARACTERISTICS Recommended torque NA 0 N.cm Other CHARACTERISTICS Other CHARACTERISTICS Recommended torque NA 0 N.cm - o N.cm Mating N 0 N.cm - o N.cm * out of SMA CDC. Mating life 500 Cycles mini NA N.cm -								
Trequency 0-11 GHz /SWR 1.20 + 0,0000 x F(GHz) Maxi nsertion loss 0.2 vF(GHz) dB Maxi KP leakage -(101 -F(GHz)) dB Maxi /oltage rating 500 Veff Maxi Dielectric withstanding voltage 1500 Veff mini nsulation resistance 5000 MΩ mini MECHANICAL CHARACTERISTICS Operating -55/+155 °C Center contact retention *18 N mini Axial force – Mating End *18 N mini Axial force – Opposite end *18 N mini Torque NA N.cm Mating N 0 N.cm Panel nut NA N.cm Mating life 500 Cycles mini		RICAL CHARAC						
Insulation resistance 5000 MΩ mini Operating -55/+155 °C MECHANICAL CHARACTERISTICS Hermetic seal NA Atm.cm3/s MECHANICAL CHARACTERISTICS SPECIFICATION Center contact retention *18 N mini Axial force – Mating End *18 N mini Axial force – Opposite end *18 N mini Torque NA N.cm Recommended torque NA 0 Mating N 0 N.cm Panel nut NA N.cm Mating life 500 Cycles mini	requency SWR sertion loss F leakage oltage rating	- (0-11 GHz 0,0000 x F(GHz) Maxi 0.2 √F(GHz) dB Maxi 101 - F(GHz)) dB Maxi 500 Veff Maxi			EN	VIRONMENTAL	
Center contact retention *18 N mini SPECIFICATION Axial force – Mating End *18 N mini * Axial force – Opposite end *18 N mini * Torque NA N.cm mini * Recommended torque N 0 N.cm Mating N 0 N.cm Panel nut NA N.cm * out of SMA CDC. Mating life 500 Cycles mini	sulation resistance	Sitage			Herme	tic seal	NA	°C Atm.cm3/s
Axial force – Mating End *18 N mini Axial force – Opposite end *18 N mini Torque NA N.cm mini Recommended torque N 0 N.cm Mating N 0 N.cm - 0 N.cm * out of SMA CDC. Panel nut NA N.cm Mating life 500 Cycles mini	MECHA	NICAL CHARAC	TERISTICS					
Recommended torque * out of SMA CDC. Mating N 0 N.cm SMA 0 N.cm - 0 N.cm Panel nut NA N.cm Mating life 500 Cycles mini	Axial force – Mating E Axial force – Opposite	nd end	* 18 N r	nini				
Panel nut NA N.cm Mating life 500 Cycles mini	ecommended torque Mating	SMA	0	l.cm	* out of		CHARACTERIST	<u>ICS</u>
			NA M					
	Mating life Weight							

This document contains proprietary information and such information shall not be disclosed to any third party for any purpose whatsoever or used for manufacturing purposes without prior written agreement from Radiall. The data defined in this document are given as an indication, in the effort to improve our products; we reserve the right to make any changes judged necessary.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for RF Adapters - Between Series category:

Click to view products by Radiall manufacturer:

Other Similar products are found below :

5945-9503-000 MCX/F-SMA/M R192417010 ADBJ20-E1-BJ379 ADM2 ADPL75-A1-PL75 242191 9317505 29-3835P AD130 ADBJ20-E1-PL74 ADBJ77-E1-UPL20 ADRMF370 242215 242228 R125680000W R192430000 UAD95 1057367-1 8311505 R114704000 R451034500 R451030500 R451543000 HDVDPN ADBJ20-K1-PL20 R451570000 R192419000 R451034000 J9 J3WE-5 R451032500 242201RP 17K132-K0085 AD-RSMAF-RTNC 53K156-K00N5 02K119-K00E3 29S132-K01N5 53S156-K00N5 02S119-S00E3 28K132-K00N5 02S109-K00S3 27-8200TP 242235 ADBJ20-E1-BJ89 000-2900 321-102-003 (SMA-50/2-H155/W1.03 AU) 1057377-1 321-350-001 (SMA-50-R/2-RG316/N2.01) RF2-03-T-00-50-G