


AMOVABLE CONTACT - PACKAGING 10

SERIES: ACC.1

1 / 1

PEN 90-1206-11B

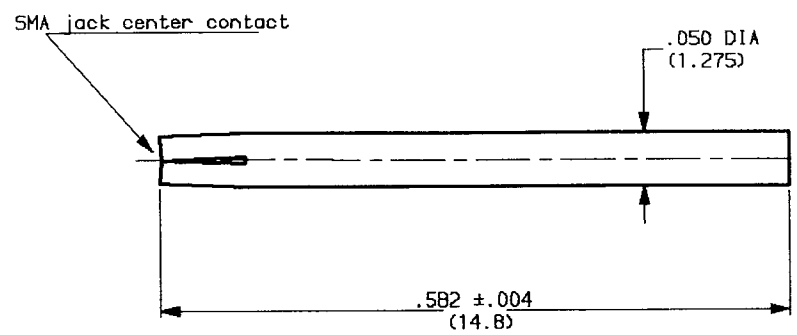

MOUNTING HOLE

B

WEIGHT oz (g)

cables:

CHARACTERISTICS

| | | |
|---------------------------------|----|----------------------------|
| NOMINAL IMPEDANCE | NA | Ω |
| FREQUENCY RANGE | NA | GHz |
| TEMPERATURE RATING | NA | °C |
| VSWR | NA | Max |
| RF INSERTION LOSS | NA | dB Max |
| VOLTAGE RATING | NA | Vrms |
| DIELECTRIC WITHSTANDING VOLTAGE | NA | Vrms |
| INSULATION RESISTANCE | NA | MΩ |
| HERMETIC SEAL | NA | cc/s cm ³ /s |
| LEAKAGE (pressurized only) | NA | psi kg/cm ² |
| - | NA | - |
| - | NA | - |

STANDARDISATION

CABLE RETENTION

| | |
|----|--------|
| NA | Lb Min |
| NA | N Min |

CENTER CONTACT RETENTION

Axial force - mating end
Axial force - opposite end
Torque (Min)

| | |
|----|----------|
| NA | Lb Min |
| NA | N Min |
| NA | Lb Min |
| NA | N Min |
| NA | Inch. oz |
| NA | cm. N |

RECOMMENDED TORQUES

Mating
Panel nut
Clamp nut

| | |
|----|----------|
| NA | inch. Lb |
| NA | cm. N |
| NA | inch. Lb |
| NA | cm. N |
| NA | inch. Lb |
| NA | cm. N |

CONSTRUCTION

| CONNECTOR PARTS | MATERIALS | FINISH |
|-----------------|------------------|------------------|
| BODY | - | - |
| OUTER CONTACT | - | - |
| CENTER CONTACT | Beryllium copper | Gold over nickel |
| INSULATORS | - | - |
| - | - | - |
| - | - | - |
| - | - | - |
| - | - | - |
| - | - | - |

| ISSUE | REVISION No | DESCRIPTION | BY | DATE |
|-------|-------------|-------------|----|------|
| . | . | . | . | . |
| . | . | . | . | . |
| . | . | . | . | . |
| . | . | . | . | . |

Initiated on 24-MAY-91

The information given here is subject to change without notice. Design changes may be in order to improve the product.



Superseded on

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [RF Connector Accessories](#) category:

Click to view products by [Radiall](#) manufacturer:

Other Similar products are found below :

[89674-0712](#) [F702RX24](#) [FERRULE-174](#) [R141802000](#) [R141805000](#) [R141842000](#) [R161862000](#) [R161862000W](#) [R280752000](#) [R280907000](#)
[R694261906](#) [RFI21-13](#) [RFI75-13-D2](#) [RFI75-4-D2](#) [AX102906](#) [AX102907](#) [18097-0013](#) [HP-375](#) [HP-500](#) [2098-0294-00](#) [2098-3251-94](#) [KA-](#)
[81-05](#) [89674-0805](#) [F1](#) [FERRULE-223](#) [202102-11](#) [213337-1](#) [220222-2](#) [24092671A](#) [24092678A](#) [R280468000](#) [R280510000](#) [R282862060](#)
[RFI155-1](#) [RFI25-12-D3](#) [RFI25-5](#) [RFI25-5-D3](#) [RFI75-12-D2](#) [RFI75-2-D2](#) [RFI75-4-D3](#) [RFI77-6](#) [360HS001M2508M6](#) [4-1532137-4](#) [5-21085-](#)
[0](#) [105274-1000](#) [111062-0490](#) [112122-SOD-LUG](#) [112-NUT-KNURL](#) [IPP-2014](#) [R280490020](#)