




PLUG MML H2.0 - PLUG SMA CABLE 1.13/50 S-BR,LENGTH=XXXMM

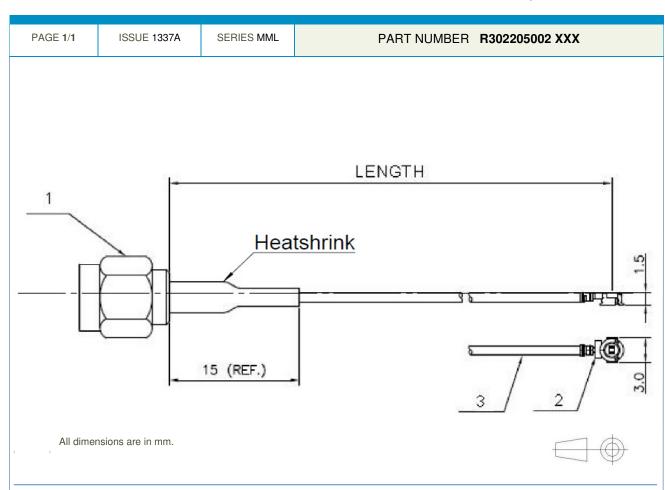

* 1 * Connector A : * 2 * Connector B : SMA PLUG (gold plated) MML PLUG (gold plated) H2.0 1.13/50 S BLACK

* 3 * Cable

Туре

ELECTRICAL CHARACTERISTICS

Impedance 50 Frequency 0-6 GHz -40/+90 ° C Operating temperature 1.3 ** VSWR 0.00 x F(GHz) Maxi Insertion loss 0.92* √F(GHz) dB Maxi Voltage rating 250 Veff Maxi Dielectric withstanding voltage 300 Veff mini Insulation resistance 500 $M\Omega$ mini

Mating status MML Plug

SPECIFICATION

g N mini Weight 3.00* Cable retention Mating life 30 C Others ** VSWR up to 3GHz 1.3 max 30 Cycles up to 6GHz 1.5 max

Length	*Insertion loss(Maxi)	*Weight(Maxi)
30 to 90	0.92 dB	3.00 g
100 to 200	1.44 dB	3.50 g
225 to 400	2.48 dB	4.00 g

Mated with MML receptacle R302.302.000

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for RF Cable Assemblies category:

Click to view products by Radiall manufacturer:

Other Similar products are found below:

73-6352-10 73-6353-3 73-6364-6 R285001001 R288940004 145111-05-12.00 1661-C-24 1801171170914KE 24P104C24J1-012 24P104C24P1-006 24P104C24P1-018 24P204C24J1-003 172-2150-EX 1800920920914PJ FCB-3030-ALT 21117-046 21117-050 PCX-24-50 24P103C24P2-003 25P203C25P2-003 PTWY-24-78 R284008001 R285001021 R285426000 R288940003 R288940008 4814-BB-24 5260-72 JT2N1-CL1-1F DLP-COAX1 4814-K-48 115101-09-06.00 MXHT83QE3000 CCNTN2-MM-LL335-26 73-6351-25 73-6352-3 73-6353-25 1800920920610PJ GD0BQ0BQ024.0 1-3636-600-5210 TL8A-11SMA-11SMA-01500-51 R284C0351060 R288940009 R288940009 R284C0351028 R288940002 9702-1SL-1 PT82NSMA 73-6353-10 R285020301W PCX-18-50