


PAGE 1/2	ISSUE 13-12-19C	SERIES ANTENNA	PART NUMBER R380300024
----------	-----------------	-------------------	------------------------

Scale 3 : 1

Scale 3 : 2

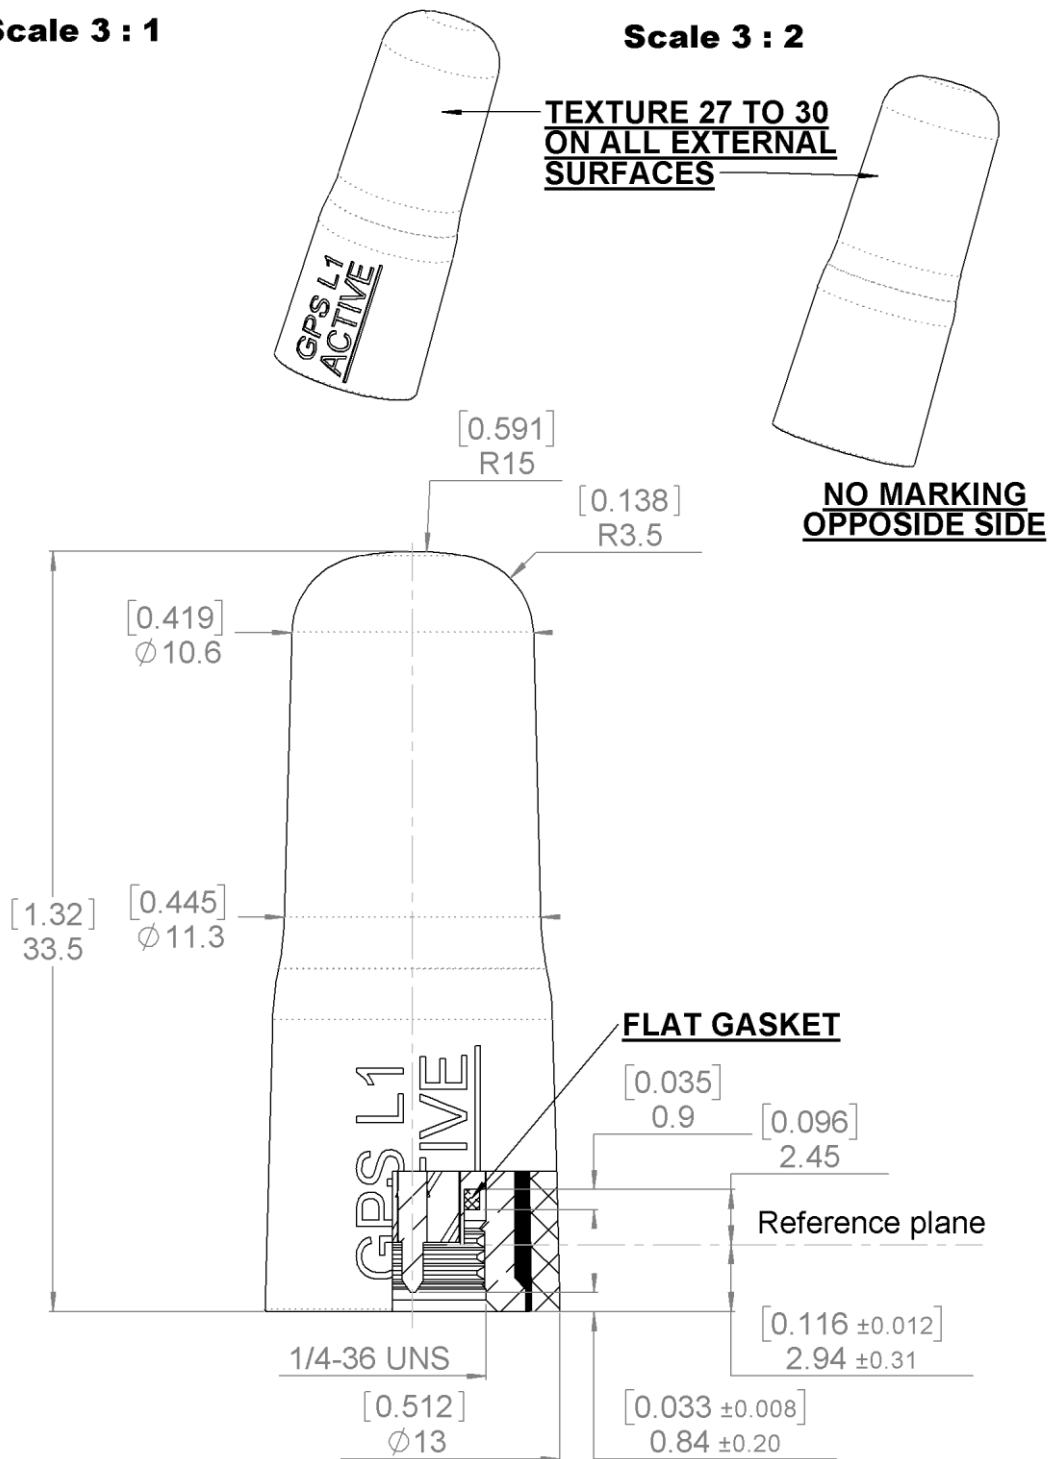

All dimensions are in mm. Tolerances according ISO 2768 m-H

PAGE 2/2	ISSUE 13-12-19C	SERIES ANTENNA	PART NUMBER R380300024
----------	------------------------	--------------------------	-------------------------------

ELECTRICAL CHARACTERISTICS

Frequency :	GPS L1 (1575.42)	MHz
Nominal Impedance :	50	Ω
VSWR :	2.5:1	Max
Gain :	19	dBic min
Polarization :	RHCP	
Axial Ratio	3	dB typ
Radiation Pattern:	Hemi-spherical	
P1 dB compression :	-12	dBm
Noise Figure (LNA alone) :	<1.7	dB
Supply Voltage :	3.3	V typ.
	3.1	V min
	3.5	V max
Current consumption :	8	mA typ
	12	mA max
Connector type :	Male SMA	

MECHANICAL CHARACTERISTICS

Plastic radome :	POLYCARBONATE	
Color :	BLACK	
Texture :	Charmille 27 to 30	
Weight :	8.71	g
Overall length :	33.5	mm
Max Diameter	ø13	mm
RoHS Compliant:	Yes	

ENVIRONMENTAL CHARACTERISTICS

Operating temperature :	-32/+55	° C
	IAW MIL-STD-810G meth 501.5 & 502.5, proc II	
Storage temperature :	-55/+85	° C
	IAW MIL-STD-810G meth 501.5 & 502.5, proc I	
Temperature Shocks	3 cycles -40/+70°C IAW MIL-STD-810G meth 503.5 , proc I	
Altitude :	40,000	ft
	IAW MIL-STD-810G meth 500.5, proc I	
Humidity :	Induced Hot Humid IAW MIL-STD-810G meth 507.5, proc II	
Immersion (mated to radio)	1m, for 2h IAW MIL-STD-810G meth 512.5, proc I	
Salt Fog :	96h (4x24h alternating wet & dry) IAW MIL-STD-810G meth 509.5	
Solar Radiation:	10 cycles, 20/4h sun/dark IAW MIL-STD-810G meth 505.5, proc II	
Transit Shocks :	26 drops from 1.2m high IAW MIL-STD-810G meth 516.6, proc IV	
Fluid Contamination	Table 504.1-II MIL-STD-810G Meth 504.1, proc II	

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Antennas](#) category:

Click to view products by [Radiall](#) manufacturer:

Other Similar products are found below :

[GAN30084EU](#) [930-033-R](#) [GW17.07.0250E](#) [1513563-1](#) [EXE902SM](#) [APAMPG-117](#) [MAF94383](#) [W3908B0100](#) [W6102B0100](#) [YE572113-30RSMM](#) [108-00014-50](#) [66089-2406](#) [SPDA17RP918](#) [A09-F8NF-M](#) [A09-F5NF-M](#) [RGFRA1903041A1T](#) [W3593B0100](#) [W3921B0100](#) [SIMNA-868](#) [SIMNA-915](#) [SIMNA-433](#) [W1044](#) [W1049B090](#) [A75-001](#) [WTL2449CQ1-FRSMM](#) [CPL9C](#) [EXB148BN](#) [0600-00060](#) [TRA9020S3PBN-001](#) [Y4503](#) [GD5W-28P-NF](#) [MA9-7N](#) [GD53-25](#) [GD5W-21P-NF](#) [C37](#) [MAF94051](#) [MA9-5N](#) [EXD420PL](#) [B1322NR](#) [QWFTB120](#) [MAF94271](#) [MAF94300](#) [GPSMB301](#) [FG4403](#) [AO-AGSM-OM54](#) [5200232](#) [MIKROE-2349](#) [WCM.01.0111](#) [MIKROE-2393](#) [MIKROE-2352](#)