


**BNC ATTENUATOR**  
**5 DB 8 GHZ 2W**

**R414.405.000**

Series : ATTENUATOR

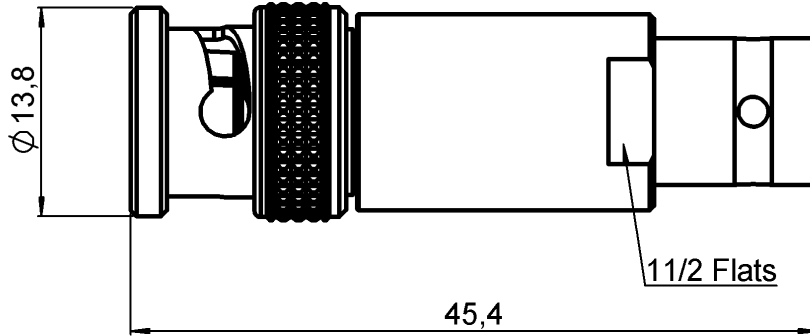

SCALE 1/1



All dimensions are in mm.



| COMPONENTS            | MATERIALS        | PLATING( $\mu\text{m}$ )   |
|-----------------------|------------------|----------------------------|
| BODY                  | BRASS            | NICKEL 5                   |
| MALE CENTER CONTACT   | BERYLLIUM COPPER | GOLD 2.5 OVER NICKEL 1     |
| FEMALE CENTER CONTACT | BERYLLIUM COPPER | GOLD 2.54 OVER NICKEL 1.27 |
| OUTER CONTACT         |                  |                            |
| INSULATOR             | PTFE             |                            |
| GASKET                | SILICONE RUBBER  |                            |
| SUBSTRATE             | ALUMINA          |                            |
| RESISTOR              | THIN FILM        |                            |
| OTHERS PARTS          |                  |                            |

Issue : 0835 L

In the effort to improve our products, we reserve the right to make changes judged to be necessary.

RADIALL 

**BNC ATTENUATOR**  
**5 DB 8 GHZ 2W**

**R414.405.000**

Series : ATTENUATOR

**ELECTRICAL CHARACTERISTICS**

|                 |        |       |
|-----------------|--------|-------|
| Frequency (GHz) | DC - 4 | 4 - 8 |
| V.S.W.R (≤)     | 1.20   | 1.25  |
| Deviation(±dB)  | 0.30   | 0.50  |


|                              |        |                       |
|------------------------------|--------|-----------------------|
| Operating Frequency Range    | DC - 8 | GHz                   |
| Impedance                    | 50     | Ω                     |
| Nominal Attenuation          | 5      | dB                    |
| Peak power at 25°C (1μs, 1%) | 100    | W                     |
| Average power at 25°C        | 2      | W (Free Air Cooled)   |
|                              |        | W (Conduction Cooled) |

**MECHANICAL CHARACTERISTICS**

|            |           |             |             |
|------------|-----------|-------------|-------------|
| Connectors | BNC       | Male Female | MIL-C 39012 |
| Weight     | 29,2160 g |             |             |

**ENVIRONMENTAL CHARACTERISTICS**

|                             |              |
|-----------------------------|--------------|
| Operating temperature range | -55 /+125 °C |
| Storage temperature range   | -55 /+125 °C |

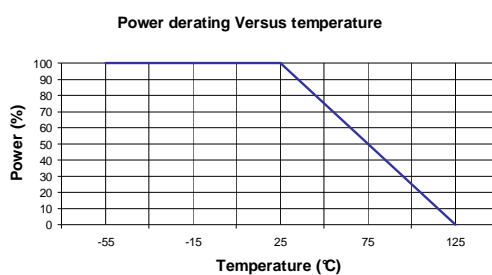

**SPECIFICATION**

**OTHER CHARACTERISTICS**

Issue : 0835 L

In the effort to improve our products, we reserve the right to make changes judged to be necessary.



## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Attenuators - Interconnects](#) category:*

*Click to view products by [Radiall](#) manufacturer:*

Other Similar products are found below :

[R411803119](#) [R413806115](#) [R413808000](#) [R413810115](#) [R413850115](#) [R414510000](#) [R414701000](#) [BNC-13](#) [R411800121](#) [R411801121](#)  
[R412412124](#) [R412450000](#) [R413800000](#) [R413805000](#) [R413830000](#) [R413840115](#) [R414730000](#) [R415420000](#) [R415703000](#) [R416010000](#)  
[R420003110](#) [R411801000](#) [R411815121](#) [R413305000](#) [R413801000](#) [R414520000](#) [R411808121](#) [R412500124](#) [R412414124](#) [R412501124](#)  
[HMC-C584](#) [R413802000](#) [R412400124](#) [R411700124](#) [R417310130](#) [R411801119](#) [R412419124](#) [R411703124](#) [R412401124](#) [R443131000](#)  
[R417130110](#) [R414700000](#) [R414505000](#) [R411802119](#) [R417720128](#) [R420706110](#) [R413811000](#) [R413803115](#) [R414501000](#) [R417903128](#)