

TECHNICAL DATA SHEET

R570 412 030

18 GHz S

SMA

FAILSAFE

S.P.D.T. SWITCH

Page 1/2

OPTIONS :/SUPP.DIODES

R F CHARACTERISTICS

FREQUENCY RANGE : 0 - 18 GHz IMPEDANCE : 50 Ohms

FREQUENCY (GHz)	0 - 3	3 - 8	8 -12.4	12.4- 18
V.S.W.R <=	1.10	1.20	1.20	1.40
INSERT. LOSS <=	0.15 dB	0.20 dB	0.25 dB	0.35 dB
ISOLATION >=	80 dB	75 dB	65 dB	60 dB
AVER. POWER (*)	240 W	150 W	120 W	100 W

ELECTRICAL CHARACTERISTICS

ACTUATOR : FAILSAFE NOMINAL CURRENT AT 25°C (±10%) : 250 mA

ACTUATOR VOLTAGE (Vcc) : 12V (10.2 to 13V)

TERMINALS : solder pins (250°C max./30 sec.)

MECHANICAL CHARACTERISTICS

CONNECTORS : SMA fem. per MIL C 39012

LIFE : 10.000000 cycles

SWITCHING TIME (nominal voltage; 25°C) : < 10 ms CONSTRUCTION : splashproof WEIGHT : < 45 g

ENVIRONMENTAL CHARACTERISTICS

OPERATING TEMPERATURE RANGE (°C): -40, +85 STORAGE TEMPERATURE RANGE (°C): -55, +85

(* : average power at 25°C)

This information is given as an indication. In the continual goal to improve our products, we reserve the right to make any modifications judged necessary


This information is given as an indication. In the continual goal to improve our products, we reserve the right to make any modifications judged necessary

4113-9212

R570 412 030

DRAWING

Page 2/2

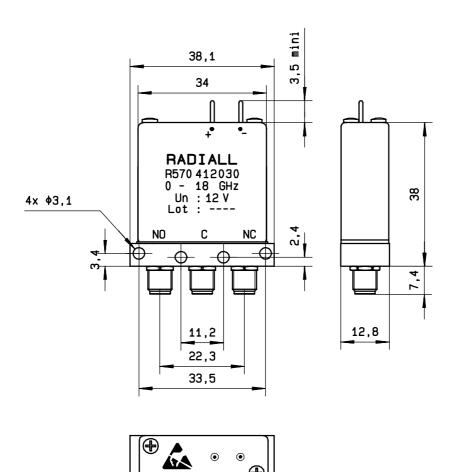


General tolerance: ± 0,5 mm

SCHEMATIC DIAGRAM

RF input



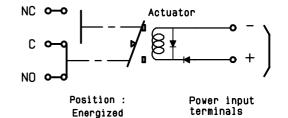

ISSUE

09.Mar.12

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Coaxial Switches category:

Click to view products by Radiall manufacturer:

Other Similar products are found below:

CR-53S10 R599311000 R599906000 R599910000 CCT-38S150-T CR-58S160 MS180LH3-HRMJ-040V300A R599312000 R512F73417
R514F73417 R595333210 R595F53225 R591363400 R595433410 R595333215 R595337220 R595343115 R595343125 R591362440
R593373148 R595343215 CCR-33K40 R595357325 CCS-18N480-TDS R591702640 R591763600 CR-33K10 R599313000 R516431100
R591722605 ARD15105 MS156LH1-HRMJ-088V300A R570412000 R570412100 R570413000 R570422100 R570423000 R570432000
R570433000 R570442000 R570442100 R570412030 R570432010 R570433100 R570443030 R570463100 R570442010
R570413030 R570452000