

Technical Data Sheet


DPDT Ramses N 3GHz Failsafe 28Vdc Diodes Pins Terminals

						•
<u>RF C</u>	CHARACTERIS	<u>STICS</u>				
	Frequency ra	ange		:	0 - 3 GHz	
	Impedance	0		:	50 Ohms	
	I					1
	Frequency (VSWR max	GHz)	DC - 1 1.15	1 - 2 1.20	2 - 3 1.25	
	Insertion loss	s max	0.15 dB	0.20 dB	0.25 dB	
	Isolation min	1	85 dB	80 dB	75 dB	
	Average pow	ver (*)	700 W	500 W	400 W	
ELE(CTRICAL CHA	RACTERIS	<u>FICS</u>			
	Actuator				FAILSAFE	
	Nominal curr Actuator volt				∷ 140 mA ∷ 28V (24 to 3	90V)
	Terminals					(250°C max. / 30 sec.)
MEC	HANICAL CH		TICS			
		ANACILING	1100			
	Connectors			:	N female pe	er MIL-C 39012
	Life				2.5 million of	cycles
	Switching Ti				< 15 ms	_
	Construction)			Splashproo	f
	Weight				: < 215 g	
<u>ENV</u>	IRONMENTAL		ERISTICS			
<u>ENV</u>					-40°C to +84	5°C
<u>env</u>	IRONMENTAL Operating te Storage tem	mperature ra	inge	:	-40°C to +85	5°C
<u>ENV</u>	Operating te	mperature ra	inge	:		
	Operating te Storage tem	mperature ra	inge ge	:		5°C
(*	Operating te Storage tem Average pow	mperature ran perature ran ver at 25°C p	inge ge	:		5°C
(* (**	Operating te Storage tem Average pow At 25° C ±10	mperature rang perature rang ver at 25°C p 0%)	inge ge	:		5°C
(*	Operating te Storage tem Average pow	mperature rang perature rang ver at 25°C p 0%)	inge ge	:		5°C
(* (**	Operating te Storage tem Average pow At 25° C ±10	mperature rang perature rang ver at 25°C p 0%)	inge ge	:		5°C
(* (**	Operating te Storage tem Average pow At 25° C ±10	mperature rang perature rang ver at 25°C p 0%)	inge ge	:		5°C
(* (**	Operating te Storage tem Average pow At 25° C ±10	mperature rang perature rang ver at 25°C p 0%)	inge ge	:		5°C
(* (**	Operating te Storage tem Average pow At 25° C ±10	mperature rang perature rang ver at 25°C p 0%)	inge ge	:		5°C
(* (**	Operating te Storage tem Average pow At 25° C ±10	mperature rang perature rang ver at 25°C p 0%)	inge ge	:		5°C



Technical Data Sheet

DPDT Ramses N 3GHz Failsafe 28Vdc Diodes Pins Terminals

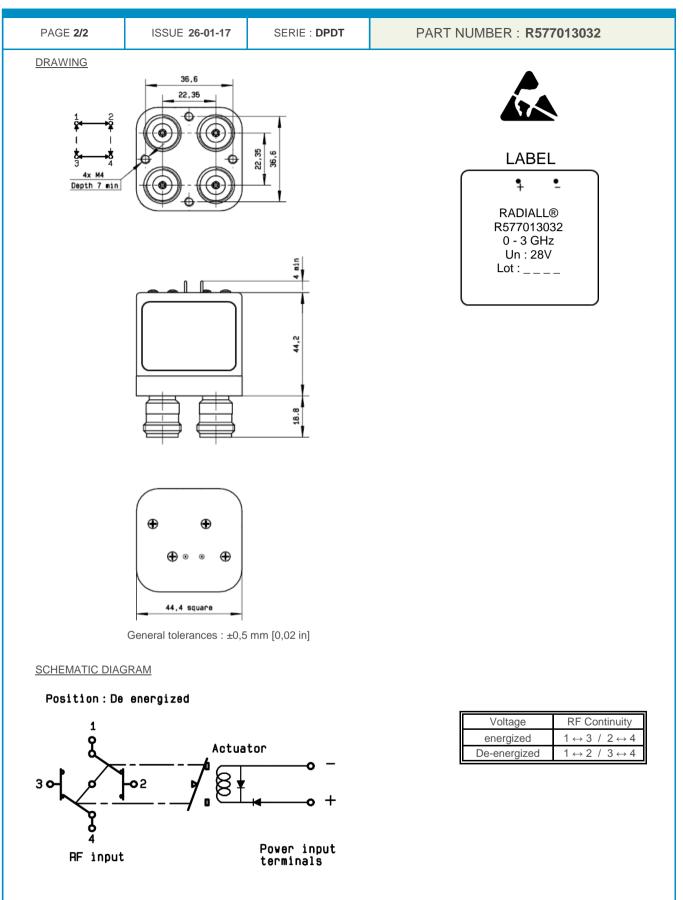

This document contains proprietary information and such information shall not be disclosed to any third party for any purpose whatsoever or used for manufacturing purposes without prior written agreement from Radiall. The data defined in this document are given as an indication, in the effort to improve our products; we reserve the right to make any changes judged necessary.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Coaxial Switches category:

Click to view products by Radiall manufacturer:

Other Similar products are found below :

 CR-53S10
 R599311000
 R599906000
 R599910000
 CCT-38S150-T
 CR-58S160
 MS180LH3-HRMJ-040V300A
 R599312000
 R512F73417

 R514F73417
 R595333210
 R595F53225
 R591363400
 R595433410
 R595333215
 R595337220
 R595343115
 R595343125
 R591362440

 R593373148
 R595343215
 CCR-33K40
 R595357325
 CCS-18N480-TDS
 R591702640
 R591703620
 CR-33K10
 R599313000

 R516431100
 R591722605
 ARD15105
 MS156LH1-HRMJ-088V300A
 R570412000
 R570413000
 R570422100
 R570423000

 R570432000
 R570433000
 R570442000
 R570412030
 R570432010
 R570433100
 R570443030
 R570442010

 R570413030
 R570452000
 R570442000
 R570412030
 R570432010
 R570433100
 R570443030
 R570442010