

TECHNICAL DATA SHEET

R577 413 005

18 GHz SMA FAILSAFE TRANSFER SWITCH

OPTIONS:

Page 1/2

R F CHARACTERISTICS

FREQUENCY RANGE : 0 - 18 GHz IMPEDANCE : 50 Ohms

FREQUENCY (GHz)	0 - 3	3 - 8	8 -12.4	12.4- 18
V.S.W.R <=	1.20	1.30	1.40	1.50
INSERT. LOSS <=	0.20 dB	0.30 dB	0.40 dB	0.50 dB
ISOLATION >=	80 dB	70 dB	65 dB	60 dB
AVER. POWER (*)	240 W	150 W	120 W	100 W

ELECTRICAL CHARACTERISTICS

ACTUATOR : FAILSAFE NOMINAL CURRENT AT 25°C (±10%) : 140 mA

ACTUATOR VOLTAGE (Vcc) : 28V (24 to 30V)
TERMINALS : D-sub 9 pins

MECHANICAL CHARACTERISTICS

CONNECTORS : SMA female per MIL C 39012

LIFE : 2.500.000 cycles


SWITCHING TIME (nominal voltage; 25° C) : < 15 ms CONSTRUCTION : splashproof WEIGHT : < 100 g

ENVIRONMENTAL CHARACTERISTICS

OPERATING TEMPERATURE RANGE (°C) : -40 , +85 STORAGE TEMPERATURE RANGE (°C) : -55 , +85

(* : average power at 25°C)

This information is given as an indication. In the continual goal to improve our products, we reserve the right to make any modifications judged necessary

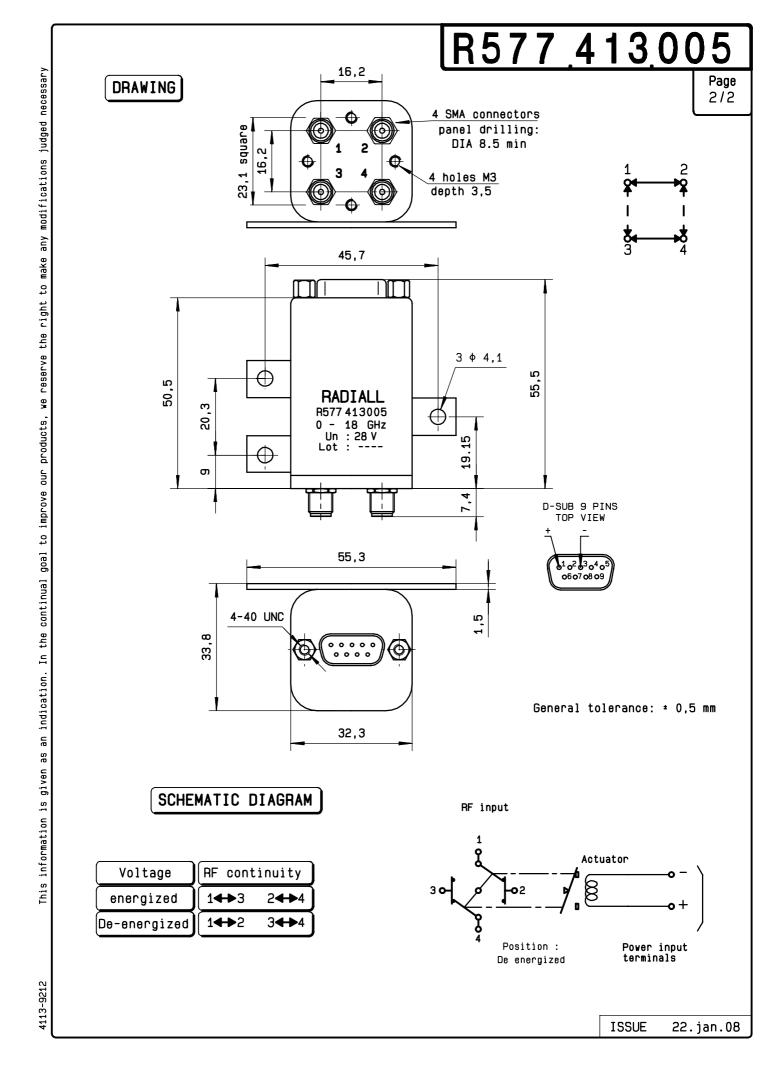

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Coaxial Switches category:

Click to view products by Radiall manufacturer:

Other Similar products are found below:

CR-53S10 R599311000 R599906000 R599910000 CCT-38S150-T CR-58S160 MS180LH3-HRMJ-040V300A R599312000 R512F73417
R514F73417 R595333210 R595F53225 R591363400 R595433410 R595333215 R595337220 R595343115 R595343125 R591362440
R593373148 R595343215 CCR-33K40 R595357325 CCS-18N480-TDS R591702640 R591763600 R591703620 CR-33K10 R599313000
R516431100 R591722605 ARD15105 MS156LH1-HRMJ-088V300A R570412000 R570412100 R570413000 R570422100 R570423000
R570432000 R570433000 R570442000 R570442100 R570412030 R570432010 R570433100 R570443030 R570442010
R570413030 R570452000