

2 mm dia. SERIES

PATCH CORDS

This series comprises :

- **BLM patch cords** Moulded miniature extension patch cords
- **BLDM patch cords** Moulded miniature stackable patch cords

Each plug is soldered onto the cable in order to assure an excellent electrical connection with very stable transfer resistance.

CHARACTERISTICS


- Current rating max <i>PVC cable 0.3 mm² section</i>	: 5 A (at 20°C)
- Dielectric withstanding voltage	: 1 500 V rms 50 Hz
- Operating voltage	: 750 V rms 50 Hz
- Insulation resistance	: $\geq 5\ 000\ M\Omega$
- Mechanical endurance	: $\geq 10\ 000$ matings
- Average insertion loss	: 14 N
- Operating temperature	: - 40°C + 70°C

► Packaging : 10 identical patch cords.

• BLM EXTENSION PATCH CORDS

Cord length	Colour
1 : 10 cm	0 : Black
2 : 20 cm	1 : Red
4 : 50 cm	2 : Green
5 : 100 cm	3 : Blue
	4 : Yellow


R 928 0XX

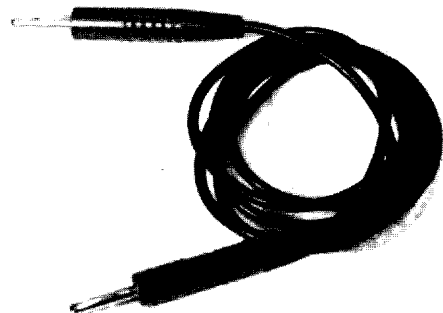

• BLDM STACKABLE PATCH CORDS

Cord length	Colour
1 : 10 cm	0 : Black
2 : 20 cm	1 : Red
4 : 50 cm	2 : Green
5 : 100 cm	3 : Blue
	4 : Yellow

R 928 1XX

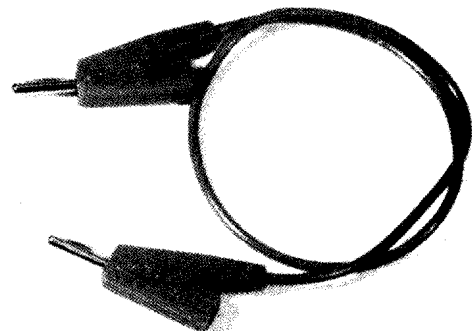

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Test Leads](#) category:

Click to view products by [Radiall](#) manufacturer:

Other Similar products are found below :

[795-2384-10-25](#) [1301430020](#) [1510-24-105](#) [15308](#) [15408](#) [15302](#) [15409](#) [BU-1149-A-36-0](#) [BU-1481-E-12-0](#) [BU-1481-E-24-0](#) [1927617](#) [2450](#)
[2524-A-60](#) [LB1F-2R-RED](#) [LB1F-2R-YLW](#) [2500](#) [2524-A-48](#) [2977-J-48](#) [R948131000](#) [380200](#) [BU-1449-E-12-2](#) [BU-1480-E-24-0](#) [BU-1481-](#)
[E-12-2](#) [BU-1481-E-24-2](#) [LB1F-2R-BLK](#) [LB1F-2R-BLUE](#) [LB1F-2R-WHT](#) [6345](#) [6432](#) [6416](#) [EM3782-24-3#](#) [R948161002](#) [R948160002](#)
[R948170002](#) [R948171002](#) [R948163002](#) [973604100](#) [934160101](#) [934160100](#) [R948174000](#) [CT3269](#) [CT3258](#) [CT3158-100](#) [HSPL](#)
[8568/AWG16/200/RT](#) [HSPL 8568/AWG16/200/SW](#) [28.0119-10020](#) [28.0127-05025](#) [28.0127-20025](#) [49.0079-20021](#) [49.0079-20024](#)