2 mm dia. SERIES

ACCESSORIES

• 20-WAY FIXED CONNECTORS

4 Versions:

12 mm between axes

Solder outlet

Pin outlet

6 mm between axes

Solder outlet

Pin outlet

These connectors contain twenty 2 mm dia. sockets moulded into an insulated monobloc of low bulk. The low pitch between sockets makes them particularly suitable for use in circuit breakers and test batteries.

ADVANTAGES:

QUICKER ASSEMBLY TIME

Sockets are no longer mounted individually (connected to block with 5 screws)

Simplified panel plercing

Orientation of solder shafts

Possibility of removing the cable harness without disconnecting each socket.

CHARACTERISTICS

Insulation resistance

Current rating maxOperating voltage

Operating temperature

Material

metallic parts

plating

Insulation

 $\geq 5000 M\Omega$

: 7 A (at 20°C)

: 500 V rms 50 Hz


: -40°C + 125°C

: brass : gold

: self-extinguishable PBT UL 94 Vo.

▶ Packaging Individually.

SOLDER OUTLET

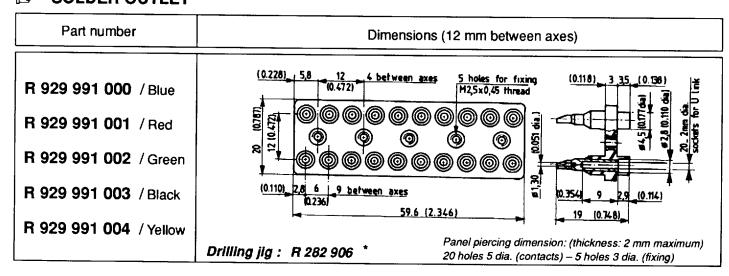

^{*} Made to order product, please consult Radiall for price and delivery



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Pin & Socket Connectors category:

Click to view products by Radiall manufacturer:

Other Similar products are found below:

6450822-1 770392-1 794042-1 796885-1 8-794535-1 PLR3455ACS-222 R929991004 R929993003 1403611-1 1-480349-5 152302-5 153211-2 1586092-1 1586129-1 1586681-4 1586700-1 1586368-1 1586380-1 1586616-1 1586680-5 16-06-0038 164164-5 1-6609930-1 172296-1 19-09-2035 200503-1 200788-2 2029090-4 2029095-4 925061-7 293734-4 293737-2 1-765362-4 1871534-1 200833-4 2008625-2 2029027-2 2029096-4 R929991000 R929991002 R929993000 319-10-101-00-005000 319-10-102-00-001000 319-10-102-00-005000 001000 319-10-105-00-001000 319-10-108-00-001000 319-10-112-00-006000 39-01-8019 319-10-101-00-001000 319-10-102-00-005000