


PAGE 1/1	ISSUE 25/04/19	SERIES TestPro	PART NUMBER TP4.2S-SMA-MM-XX
----------	-----------------------	-----------------------	-------------------------------------

CUSTOMER : All SPECIFICATION : - ISSUE : - DATE -
 All dimensions are in mm

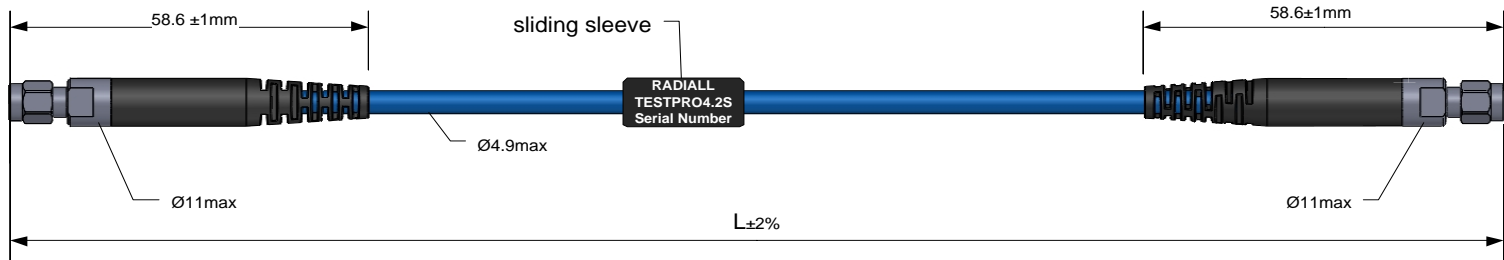

Part Number	Overall Length (mm)	Tolerance (mm)
TP4.2S-SMA-MM-24	610	±12
TP4.2S-SMA-MM-36	914	±18
TP4.2S-SMA-MM-48	1220	±24
TP4.2S-SMA-MM-78	2000	±40

CONNECTORS DESIGNATION Connector 1: **R125064151 SMA straight plug Stainless steel passivated Torque wrench : 110 N.cm** Connector 2: **R125064151 SMA straight plug Stainless steel passivated Torque wrench : 110 N.cm**

CABLE DESIGNATION **TestPro4.2S**
 PROTECTIVE JACKET -
 OUTER DIAMETER **4,90 mm max**
 MARKING **White marking on a black sliding heatshrink sleeve**

ELECTRICAL CHARACTERISTICS

Characteristic impedance **50 ±2 Ohms**
 Frequency band : **DC - 20 GHz**

Part Number	Length (mm)	Max insertion loss (dB) at 20°C	Max VSWR at 20°C
TP4.2S-SMA-MM-24	610	2,01	1,27 : 1
TP4.2S-SMA-MM-36	914	2,86	1,27 : 1
TP4.2S-SMA-MM-48	1220	3,71	1,27 : 1
TP4.2S-SMA-MM-78	2000	5,89	1,27 : 1

Phase stability with bending (*) **<3,40 ° at 20GHz**
Stabilité de phase en enroulement

Attenuation stability with bending (*) **<0.05 dB at 20GHz**
Stabilité de pertes en enroulement

(*) Test done according to IEC60966-1. Cable is submitted to 5 windings 360° clockwise on a 100mm mandrel. Measurement is done after 5 windings.

MECHANICAL CHARACTERISTICS

Static bending radius : **25 mm**
 Dynamic bending radius : **50 mm**
 Life (Connectors) : **5 000 Cycles**

ENVIRONMENTAL CHARACTERISTICS

Temperature range : **-55°C to +105°C**

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [RF Cable Assemblies](#) category:

Click to view products by [Radiall](#) manufacturer:

Other Similar products are found below :

[73-6352-10](#) [73-6353-3](#) [R285001001](#) [R288940004](#) [145111-05-12.00](#) [1661-C-24](#) [1801171170914KE](#) [24P104C24J1-012](#) [24P104C24P1-006](#)
[24P104C24P1-018](#) [24P204C24J1-003](#) [172-2150-EX](#) [1800920920914PJ](#) [FCB-3030-ALT](#) [21117-046](#) [21117-050](#) [PCX-24-50](#) [24P103C24P2-](#)
[003](#) [25P203C25P2-003](#) [R284008001](#) [R285001021](#) [R285426000](#) [R288940003](#) [4814-BB-24](#) [5260-72](#) [JT2N1-CL1-1F](#) [DLP-COAX1](#) [4814-K-](#)
[48](#) [115101-09-06.00](#) [CCNTN2-MM-LL335-26](#) [73-6351-25](#) [73-6352-3](#) [73-6353-25](#) [1800920920610PJ](#) [GD0BQ0BQ024.0](#) [1-3636-600-5210](#)
[TL8A-11SMA-11SMA-01500-51](#) [R284C0351060](#) [R288940009](#) [R284C0351028](#) [R288940002](#) [9702-1SL-1](#) [PT82NSMA](#) [73-6353-10](#)
[R285020301W](#) [PCX-18-50](#) [Minibend-9](#) [Minibend-4](#) [BNC TO SMA Cable](#) [MIKROE-274](#)